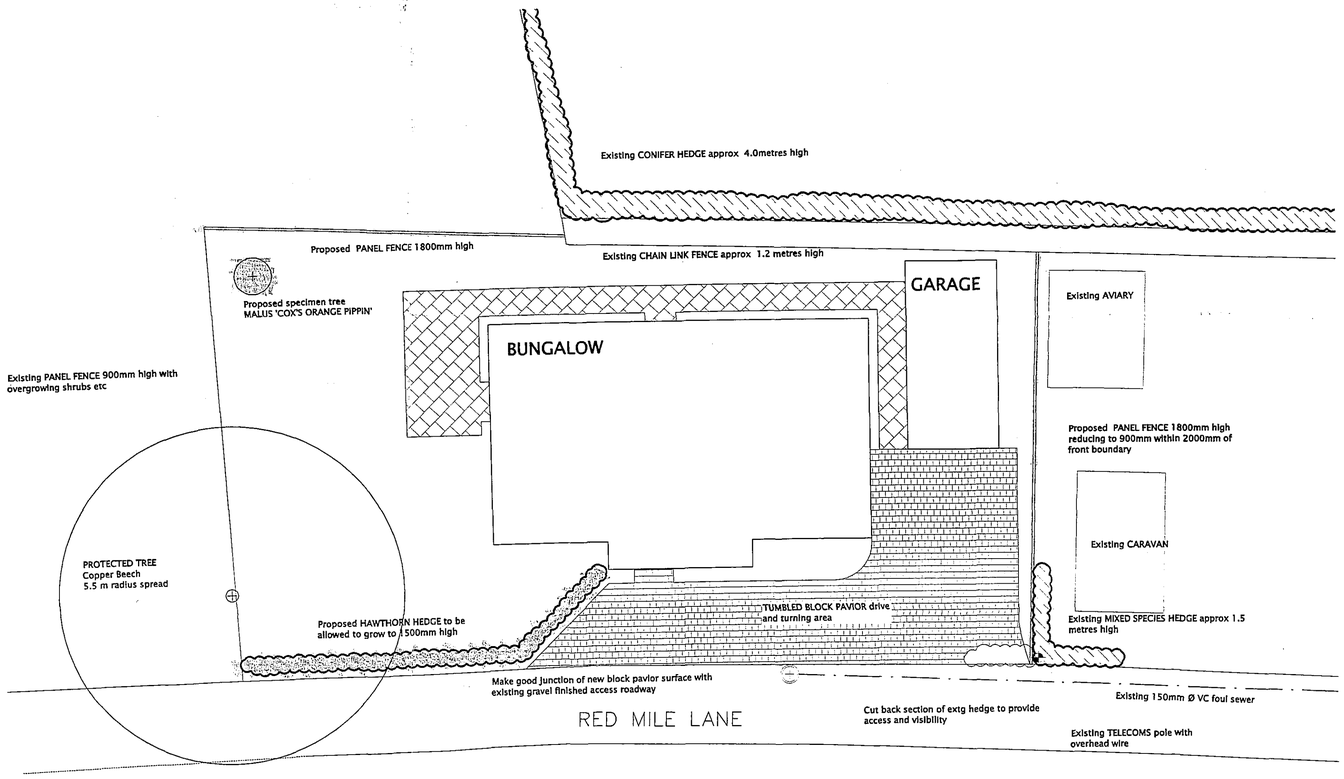


LANDSCAPING PROPOSALS

LANDSCAPING NOTES

HARD LANDSCAPE

Areas of hard landscape to be the driveway and turning and footpaths.

The driveway and turning to be in a light grey tumbled block pavior set in a sand bed on a 150mm minimum compacted hardcore bed. Edge and perimeter blocks to be set in concrete and haunched to prevent movement.
Rainwater is to drain to the edges on to the soft garden areas and the blocks are to be laid to falls to achieve this.

The pathway paving to be in light grey riven finished concrete paving slabs bedded on a lean mix base on 100mm compacted hardcore. Paths to be 900mm wide and set 300mm away from the wall face of the bungalow, the gap between being filled with granite chippings.

SOFT LANDSCAPE

HEDGEROW PLANTING

The hedgerow planting to the front garden boundary is to be 45cm ~ 60cm CRATAEGUS MONOGYNA bare root transplants set at 500mm centres in two rows 250mm apart each row staggered by 250mm.

All transplants are to be protected by proprietary PVC tubes

Apply a granular slow release combined fertiliser and herbicide

All hedge planting to be protected from weed invasion by 70mm layer of chipped wood/bark mulch to 900mm wide

TREE PLANTING

(SPECIMEN TREE)

1no MALUS 'Cox's Orange Pippin' 10 litre container grown staked and tied with mulch to base as specified

GENERAL NOTES

All trees to be staked and tied and generally planted in accordance with the SHDC Guidance Notes "Recommneded Planting Standards for Trees".

AMENDMENTS

A

SHDC
Planning & Development
15 JAN 2007
Ref: 0069/07

DETERMINED PLAN

L. A. Building Design
Architectural and Surveying Practice
55 Hannam Boulevard
Spalding
Lincolnshire PE11 1LB
Telephone/Fax: Spalding (01775) 711437

Peter S Lithgow MCIOB MCIAT
Member of the Chartered Institute of Building and
Member of the Chartered Institute of Architectural Technologists

project
Proposed Bungalow on Plot at
Redmile Lane, PINCHBECK,
Spalding, Lincolnshire.

client
HAWTHORNE HOMES LIMITED

drawing
LANDSCAPING PROPOSAL

date	scale(s)
January 2007	1:100
drawn by	checked
Peter Lithgow	PSL
job no	drawing no
06/25	03