

Land north of Wardentree Lane, Pinchbeck

Landscape Management Plan

Client: Bellway Homes Eastern Counties

17th June 2021 – Revision A

Ref: GL1486

Report Issue 1: 24/05/2021

Status: FINAL ISSUE

Author: David Carter CMLI

Report Issue 1: 17/06/2021

Status: REV A FINAL ISSUE

Author: David Carter CMLI

Updated to include latest site landscaping and planning layout.

Golby + Luck Ltd
Wilson House
207 Leicester Road
Ilstock
Leicestershire
LE67 6HP

t: 01530 265688

e: info@golbyandluck.co.uk

w: www.golbyandluck.co.uk





CONTENTS

1 MANAGEMENT OPERATIONS..... 1

2 MANAGEMENT SCHEME REVIEW & MAINTENANCE SCHEDULES 14

APPENDIX A – GOLBY & LUCK LANDSCAPE PROPOSALS GL1486 01 & 02

APPENDIX B – PLANNING LAYOUT



1 MANAGEMENT OPERATIONS

Introduction

- 1.1 This Landscape Management Plan has been prepared by Golby + Luck Landscape Architects in support of the planning application by Bellway Homes (Eastern Counties) for residential development at land north of Wardentree Lane, Pinchbeck. This document provides a comprehensive schedule of maintenance for annual operations and long-term management plan for the proposed open spaces, see **Appendix B**.
- 1.2 The initial landscape contract will include 12 months maintenance and defect liability period. Following the initial 12-month maintenance defect liability period the landscape areas will be covered by the approved Contractor who will take responsibility for all hard and soft landscape elements on a running contract managed by the appointed residents Management Company. This plan will run in perpetuity, and will be reviewed at 5 year intervals so that operations can be adapted to the development of the landscaping scheme.
- 1.3 The overall objectives for this management plan are:
 - To secure the long-term health and retention of the existing trees and hedgerows to the site and secure wildlife and ecological benefits where possible;
 - To secure the implementation and establishment of the proposed landscaping scheme, and to secure wildlife and ecological benefits;
 - To establish a functional and attractive public open space network that contributes to the visual amenity of the site and enjoyment by users;
 - To ensure best horticultural and health and safety practices at all times;
 - To maintain high standards of landscape development thorough considered management procedures;
 - To ensure that methods employed respect and encourage wildlife at all times; and
 - Defects in the landscape are identified early and addressed promptly.
- 1.4 This document should be read in conjunction with the latest revision of the site landscape proposals, see **Appendix A**.

Insurances and Certification

- 1.5 The appointed Contractor must provide details of all necessary insurances and certification to carry-out the works specified in this management plan. It is the responsibility



of the Management Company to ensure that all submitted insurances and certificates are up to date and provide the appropriate level of cover for the specified works.

Landscape Operations

1.6 The following sets out the landscape components that are considered in detail in this management plan:

- Litter and debris removal;
- Management of existing trees and hedgerows;
- Amenity grass cutting;
- Meadow grass cutting;
- Native tree and shrub maintenance;
- Amenity tree and shrub maintenance;
- Hedgerow maintenance;
- SUDS maintenance;
- Hard landscape and site furniture maintenance; and
- Children's play area.

Environmental Considerations

1.7 All chemical weed control must be carried out by suitably trained staff in accordance with the manufacturers recommendations and the legislation set out below:

- The Food and Environment Protection Act (1985);
- The Control of Pesticides Regulations 1986 (COPR) (as amended 1997);
- The Control of Substances Hazardous to Health Regulations (2002);
- The Environment Protection Act (1990)

1.8 It is the Contractors responsibility to ensure that all operatives are conversant with the foregoing legislation and other relevant Codes of Practice and British Standards. The Contractor will make any notifications as are required under the terms of The Food and Environment Protection Act (1985), and will be responsible for any damage caused through the inappropriate use or application of any such hazardous substances.

1.9 Horticultural peat is not to be used as mulch on any beds or as a soil conditioner.

1.10 Where appropriate arisings from the site should be recycled. In the case of fallen or lopped tree material this can be located within areas of undergrowth, away from key public spaces, to form eco-stacks. The creation of such features must be done so in



consultation with the Management Company and should not be used as a measure to dump arisings on the site.

- 1.11 All arisings (unless otherwise specified) will be removed from site and deposited at an approved tip or registered green compost facility.
- 1.12 Watering operations will be carried out as specified in this management plan. A water source will be identified by the Management Company. If no water source is available then watering will be carried out using a bowser.

Landscape Management Preambles

- 1.13 The Contractor will visit the site and take note of all existing conditions including levels, condition of vegetation, soil conditions, and access. No claims that are based on a lack of understanding of the site or the nature of the work required to carry out the operations in this plan will be entertained.
- 1.14 At all times care will be taken to avoid interference with the established levels and contours of the ground, and to avoid damage to footpaths, roads, drains, manholes and existing structures and vegetation. Damage so occasioned is to be made good at the Contractors expense.
- 1.15 All work will be carried out by experienced and qualified operatives holding the necessary training certificates to undertake the prescribed works. All works detailed in the following specifications shall be carried out in accordance with good horticultural practice, using materials, plant and machinery appropriate to the task, undertaken in such a manner that avoids damage and/or nuisance to the site and its surroundings. Any plant material that dies as a result of the Contractors neglect will be replaced at their cost.

Litter Removal

- 1.16 The Contractor will ensure that the entire site is kept free of litter and other debris through a regular programme of monitoring, collection and disposal, coinciding with visits to maintain grassed areas and planting.
- 1.17 Particular care will be taken to remove all broken bottles, glass, tins, sharp objects and other items likely to constitute a hazard to the public.
- 1.18 The Contractor will take particular care when carrying out litter collection to ensure that any discarded needles or syringes are removed as soon as they are discovered. Such items must be packaged separately from other litter, and be contained within



appropriately labelled, puncture-proof sharps containers and disposed of in a safe manner.

- 1.19 The Contractor must ensure that all operatives likely to come into contact with needles and syringes have been instructed in the means of safe collection and disposal, and that they have been issued with, and wear, adequate protective gloves and footwear to protect against penetration of needles and other sharp objects.
- 1.20 All litter and debris shall be removed off site to an authorised tip specified by the Contractor.
- 1.21 This shall be carried out in accordance with the Code of Practice on Litter and Refuse issued under Section 89 of the Environment Protection Act (1990).

Management of Existing Trees and Hedgerows

- 1.22 Following the completion of the construction phase and commencement of the landscape management phase all levels and surface finishes will be checked around all retained trees and boundary hedgerows. Where levels and/or surfaces are considered unsatisfactory these will be rectified to a satisfactory condition.
- 1.23 At each visit all trees and hedgerows will be inspected and cleared of litter and debris in accordance with the details set out above.
- 1.24 All works to trees and hedgerows will be carried out to avoid the Birds Nesting Season (March to August inclusive). Any works to retained trees must be approved by a qualified Ecologist to safeguard potential bat habitat.
- 1.25 Retained trees will be inspected at each visit and any deadwood considered dangerous will be removed in accordance with the recommendations set out in BS 3998: 2010 'Tree work recommendations'.
- 1.26 Any deadwood in trees will be either retained on site in the form of eco stacks/vegetation piles or removed from site to a registered tip.
- 1.27 Retained native hedgerows will be cut every other year, or on a rotation cycle to ensure that not all sections of hedgerow are cut in the same growing season. Where appropriate sections of hedgerow should be left to allow the maximum opportunity to:
 - Encourage species diversity;
 - Provide suitable habitat for ground foraging wildlife;



- Provide suitable habitat for nesting birds and insects; and
 - Maximise opportunity for pollen and nectar production as a resource for bees and butterflies.
- 1.28 Operations should be carried out to encourage the wildlife and biodiversity potential of all native hedgerows. Further guidance can be found in Hedgerow cutting: answers to 18 common questions – Natural England (2007). Reference should also be made to Hedgelink UK (www.hedgelink.org.uk).
- 1.29 Native hedgerow margins (existing & proposed): where hedgerows adjoin amenity grassland a minimum margin width of 500mm shall be maintained as longer grass for bio-diversity value. Grass shall be cut once per annum to 300mm in height. Grass shall be cut by means of tractor mounted flail, pedestrian guided rotary or reciprocating blade machines.
- 1.30 Suitable safety precautions should be taken during cutting to protect workers carrying out the task and members of the public from any hazards that could potentially be caused by this work.
- 1.31 Where necessary the hedgerow will be gapped up using appropriate native species to be planted as transplanted and/or container stock with proprietary spiral guards and cane supports and/or shrub shelters and stakes, as necessary.
- 1.32 All arisings are to be removed from site to the Contractors specified tip.

Amenity Grassland

- 1.33 Prior to cutting all areas will be cleared of litter and debris in accordance with the section detailed above.
- 1.34 All operations will be carried out using machinery appropriate to the task; cylinder, rotary or mulch mowers. Mowing operations will only be carried out during appropriate weather conditions avoiding sustained periods of rain, heavy frost, snow, and waterlogging.
- 1.35 Operations will be suspended where ground conditions prevent the use of machinery without damage to the ground surface. Where operations are suspended due to unsuitable conditions additional maintenance visits will be agreed in order to maintain the sward within acceptable growth limits.
- 1.36 During each maintenance visit the Contractor will cut adjacent to fences, walls, kerbs, paths, trees and other boundaries or obstacles using equipment suitable to the task.



Strimmers will not be used around the base of trees. Strimming will be restricted leaving an un-cut sward at the base of each trees of a radius of not less than 500mm from the outside edge of the trunk. The frequency of cuts shall remain flexible in order to accommodate growth rates and weather conditions. As a general guide cutting is likely to be required every two weeks in high maintenance areas, ensuring that the sward height does not exceed 75mm and that the presence of flowering weed species is suppressed. The height of cut shall be 30mm. The Contractor is required to assess growing conditions and adjust maintenance schedules as necessary, taking into account bulb planting where it occurs.

- 1.37 All cuttings are to be evenly dispersed over the ground.
- 1.38 Following cutting, all grass clippings and other debris shall be swept from adjacent areas of hard standing and removed from site to an authorised tip, or dispersed over the plot.

Meadow Grassland

- 1.39 During the 1st year of establishment meadow grassland will be cut twice in each growing month to maintain a balance between the faster growing species and flowers. The grassland will be mown to a height of 40-60mm with arisings cleared from the site.
- 1.40 In following seasons prior to cutting all areas shall be cleared of litter and debris in accordance with the section detailed above. To maintain diversity, all meadow grass areas will be cut annually in late June to end of August following flowering (the summer hay cut). An autumn cut will be carried out in November to leave the grass short over the winter period (cut to 40-75mm). If required a spring cut should be carried out prior to the end of May to remove the first flush of grass (cut to 40-75mm). All arisings are to be removed from site unless otherwise directed.
- 1.41 The diversity of the grassland should be subject to on-going monitoring to ensure maximum ecological benefit.

Native Tree and Shrub Planting

- 1.42 Native tree and shrub planting will be managed to achieve full natural growth potential and deliver its landscape function.
- 1.43 Year 1. Areas of new tree and shrub planting will be attended to monthly. All stock deemed to be dead, dying or diseased within this period will be replaced. Weed clearance: all planting areas are to be kept weed free by hand weeding or herbicide treatment.

Litter clearance: all litter is to be removed from planting beds



Watering: planting areas are to be brought up to field capacity at each visit and each tree is to receive 20 gallons

Checking trees: all tree ties and stakes are to be checked and adjusted if too loose, too tight or if chafing is occurring; any broken stakes are to be replaced.

Formative pruning: any damaged shoots/branches are to be pruned back to healthy wood; plants are to be pruned in accordance with good horticultural practice to maintain healthy well-shaped specimens. Trees adjoining pedestrian or vehicular thoroughfares should be crown-lifted as necessary to maintain suitable clearance.

- 1.44 Year's two to five inclusive. Areas of new tree and shrub planting will be attended to three times during the growing season (April to September inclusive) and one during the dormant period (October to March inclusive). The following operations will be carried out on each visit:

Litter clearance: all litter is to be removed from planting beds.

Firming up: all plants to be checked and firmed up in the ground as necessary.

Pruning: any damaged shoots/branches are to be pruned back to healthy wood using secateurs cutting back to above a live outward facing bud or shoot. Trees adjoining pedestrian or vehicular thoroughfares should be crown-lifted as necessary to maintain suitable clearance.

Weed clearance: weed growth to be eliminated during summer visits with a suitable translocated herbicide such as 'Round-up', in line with the manufacturer's instructions and in compliance with the Pesticides Act 1998. Tree shelters shall be lifted as necessary to achieve weed control and re-firmed in the ground after completion of the work. Dead weed material shall be removed during the following visit to site.

Grass control: grass growth within the planting beds shall be treated during the winter visit with a suitable residual herbicide such as 'Kerb' (pbi), in line with the manufacturer's instructions and in compliance with the Pesticides Act 1998.

Tree shelters: tree shelters (if fitted) shall be checked at each visit, stakes firmed up as necessary and ties adjusted. Any missing or vandalised shelters or ties shall be replaced and lopsided shelters straightened.

Dead trees/shrubs: any dead trees or shrubs are to be removed and the resulting hole filled. Replacement planting is to be carried out during the next planting season.



- 1.45 Year 6 onwards. The appropriate level of annual maintenance for new tree and shrub planting will be dependent on how well the trees and shrubs have established. The number of maintenance visits will generally be reduced from year six onwards, although the same operations as described above are likely to be required until at least year ten. At least two visits should be undertaken each year, one at the start of the growing season and one at the end of the growing season to inspect stakes and ties. Any looseness, constriction or abrasion will be corrected by adjustment or replacement as needed. Where stakes are no longer required, they will be removed from site. Dead trees are to be replaced, as required. At year ten the overall condition and structure of planting will be reviewed and a programme for future management prepared.

Specimen Tree Planting

- 1.46 All tree works will be carried out in accordance with BS8545: 2014 'Trees: from nursery to independence in the landscape – Recommendations'. More specifically all trees will be inspected at each visit in accordance with the young tree quality assessment set out under Figure D.4 (page 53) of BS8545. Formative pruning will be carried as necessary in accordance with Figure G.1 (page 73) of the BS8545. Trees identified as being defective, declining, or damaged by the adopting authority will be replaced at the Contractor's expense, unless evidence can be provided to demonstrate that the defective nature, decline, or damage to the tree(s) was beyond the control of the Contractor.
- 1.47 In years 1 – 5 following planting, trees are to be watered as required between March and September to maintain a vigorous and healthy condition. Trees are to receive 5 gallons of water per tree or be watered to field capacity. As a guide, a minimum of 12 watering visits are likely to be required annually in years 1 – 3, however, this may be adjusted relative to weather conditions such as prolonged dry or wet spells. Where necessary, a suitable nitrogen, phosphorus and potassium (N:P:K) fertiliser should also be selected by the Contractor, based on the site's existing soil conditions, and applied to trees in April.
- 1.48 All staked trees will be inspected at each maintenance visit, and any trees which have died or are excessively damaged will be removed from site, complete with the stake, and the ground reinstated.
- 1.49 Mulched areas around trees will be maintained to an acceptable standard (see details on mulching standard set out below in reference to amenity shrub planting).
- 1.50 At the start and end of each growing season all stakes, ties and guying systems will be inspected. Any looseness, constriction or abrasion will be corrected by adjustment or



replacement as necessary. Where the support of a stake is no longer required the stake will be removed from site.

- 1.51 Any trees which have died as a result of the Contractors operations or omissions will be replaced by the Contractor at their expense during the next planting season.
- 1.52 Where the appointing company has agreed that plant deaths have arisen due to circumstances out of the control of the Contractor, replacement planting will be instructed by the appointing company and paid for at an agreed rate.

Amenity Shrub Planting

- 1.53 During years 1-5 or until canopy closure, planting will be maintained during annual visits.
- 1.54 Prior to maintenance, all areas shall be cleared of litter and debris in accordance with details set out above.
- 1.55 All plants will be checked and where necessary firmed into the ground.
- 1.56 Any damaged shoots or branches will be pruned using secateurs.
- 1.57 The Contractor will ensure that all shrub beds are maintained 90% free of weed growth. This shall normally be achieved by the application of appropriate contact or residual herbicides, although it remains the responsibility of the Contractor to adopt other methods where herbicide application is unsuccessful or impractical.
- 1.58 The Contractor will remove any dead, dying or diseased plants, during each maintenance visit. The appointing company will be informed of the location, number and species of all material that has been removed. Any plants that have died as a result of the Contractor's operations or omissions will be replaced by the Contractor at their expense during the next planting season.
- 1.59 Where the appointing company has agreed that plant deaths have arisen due to circumstances out of the control of the Contractor, replacement planting will be instructed by the appointing company and paid for at an agreed rate.
- 1.60 All replacement planting will be carried out using similar species to those removed unless alternative species are agreed with the appointing company.
- 1.61 In any mulched beds where the depth of cover is below 50mm additional mulch will be added to maintain a minimum of 50mm of cover.



- 1.62 The Contractor will clean all hard standing, gullies, drains, and grassed areas of soil spillage, bark mulch, and leaves. All arisings will be removed from Site to an approved tip.

Ornamental Hedgerow Planting

- 1.63 Prior to maintenance, the hedge line shall be cleared of litter and debris in accordance with the litter removal section as detailed above.
- 1.64 Pruning will be carried out using mechanical cutters according to the type of hedge. Correct equipment and attachments must be used.
- 1.65 All cuts will be clean, and any ragged edges will be removed using a sharp knife except where it has agreed that a side arm flail or reciprocating knife blade mechanical cutter may be used to carry out the work.
- 1.66 Unless otherwise stated, current growth will be removed back to a regular line and shape with the width at the top edge less than at the base and the general shape as that which existed at the completion of the last approved pruning.
- 1.67 Frequency of hedge cutting will depend on the species mix and the locality of the hedge. In general, field hedges will be cut once per year although more ornamental species may require a second cut. Hedge growth will be monitored throughout the year and pruned if excess growth presents an obstruction.
- 1.68 The base of hedges shall be inspected and if necessary kept free of weeds throughout the growing season by the use of translocated herbicides such as 'Round-up' glyphosate herbicide, in accordance with manufacturer's instructions, in line with the manufacturer's instructions and in compliance with the Pesticides Acts (1998). If appropriate mechanical methods to be used. Dead weed material shall be removed during the following visit to site. In locations where the development of a base layer is desirable herbicide application should not be carried out. Such locations are to be agreed with by the appointing company.

SUDS Facility

- 1.69 The grass areas within the facility have been specified to cater for seasonal flooding and damp conditions, and will only require limited management. In addition areas of native shrub planting with tree planting have been specified to the boundaries of the facility to provide increase habitat and foraging opportunities.
- 1.70 The attenuation pond will be managed in accordance with CIRIA SUDs Manual C753. At each maintenance visit the Contractor will inspect the SUDS facility and remove any



branches and leaf debris and/or any other object that are likely to restrict water flow/capacity. All areas will be inspected and cleared of litter and other debris in accordance with the details set out above.

- 1.71 The Contractor will inspect all outfall features, check grilles (if present), and remove any obstructions.
- 1.72 Excess silt is to be removed from the base of facilities to maintain volume capacity and safeguard functionality of the balancing ponds themselves as necessary. A suggested 5-10 year clean-out cycle is to be adopted initially but this is to be monitored and reviewed by the contractor.
- 1.73 Where material is removed it should be placed for a 2 week period at the edge of the pond to allow insects and creature to return to the waterbody. Following this period all material will be removed from site to the Contractor's tip.
- 1.74 The management of the pond should be reviewed by the ecological consultant and appropriate measure taken to enhance biodiversity and wildlife potential where appropriate, and without affecting the drainage function of the pond.

Hard Surfaces and Street Furniture

- 1.75 The Contractor will check at each visit that all the hard surfaces and street furniture is safe and fit for purpose.
- 1.76 Hard surfaces are to be reviewed at each visit. Any damage is to be recorded and made good either during the visit or at the following visit. If the repairs cannot be carried out or completed the Contractor will make the area safe and/or cordon off any sections that present a hazard. Any such areas will be made good as soon as practically possible. Every effort should be made to match into the original materials, making sure line/levels are correctly adhered to.
- 1.77 All roads and paths will be treated with a suitable herbicide spray in accordance with Manufacturer's recommendations to remove weeds and moss. Hard surfaces will be swept at each visit.
- 1.78 All furniture will be maintained to a standard so that it is clean, safe and fit for purpose at all times. Any damage will be made good during the maintenance visit. Otherwise the item will be made safe and/or cordoned off and made good as soon a practically possible. All repairs to street furniture will be carried out using parts sourced from the supplying manufacturer and carried out in accordance with their guidelines.



Children's Play Area

- 1.79 Prior to the play area opening for public use the Management Entity will produce a play area risk assessment in accordance with the Management of Health and Safety at Work Regulations 1999 and RoSPA guidelines. This will include the identification of 'risk', assessing the risk and actions for risk reduction. This will be retained by the Management Entity and reviewed on an annual basis.
- 1.80 At each maintenance visit all areas will be cleared of litter and debris in accordance with the section set out above.
- 1.81 All areas for play will be inspected and maintained in accordance with requirements of BS EN 1176/77 and best practice guidelines from the Royal Society for the Prevention of Accidents (ROSPA).
- 1.82 Recorded weekly safety inspections will be carried out by RoSPA qualified play inspectors, followed up by a 6 weekly structural check. The frequency may vary depending on use or with any variation agreed with the Management Entity and Local Authority following best practice guidance.
- 1.83 A visual assessment of all facilities will be undertaken at each site visit by the Management Entity. Any defects or hazards considered dangerous are to be dealt with immediately by immobilising the item and making the item safe until repair and only if necessary, will the play facilities will be closed until appropriate measures have been taken to make the facilities safe and fit for purpose. The Local Authority is to be notified of any closures
- 1.84 All inspections as set out above are to be carried out by a suitably qualified person (please refer to the Register of Play Inspectors International (RPII) for requirements).
- 1.85 An Outdoor Annual Inspector accredited by the RPII shall carry out certified inspections annually, and permanent record maintained to ensure continued compliance with legislation.
- 1.86 Contact details for the Management Entity will be displayed in a suitable location at each play facility and updated should this change promptly. The contact information must include a direct telephone number so that any faults can be reported and dealt with in an appropriate timeframe. The Management Entity to have out of hours arrangements to allow reporting of faults at any time.



- 1.87 Maintenance of equipment and safety surfacing will be undertaken in strict accordance with the manufacturer's recommendations. This will include painting, vandalism, graffiti and sweeping.
- 1.88 All replacement parts must be sourced from an accredited manufacturer/supplier and be appropriate for the intended use. The Management Entity is to retain a record of all warranty inspections, maintenance, repairs and modifications carried out to any part of the play apparatus and/or associated safety surfacing.



2 MANAGEMENT SCHEME REVIEW & MAINTENANCE SCHEDULES

2.1 The sequence of agreement, monitoring and review is set out below. It is envisaged that at each stage agreement will be reached between the Contractor, Management Company, and the Local Authority. It is the responsibility of the Contractor to bring to the attention of the Management Company any issues that require immediate attention. Any such issues left unchecked that result in permanent damage or degradation of the landscape and associated environment will be put right at the Contractors expense. The stages of agreement, monitoring and review are set out below:

- Management scheme and annual maintenance schedules to be agreed by all parties involved (including the Local Authority) in the on-going management of the landscape and features specific to this plan;
- At the end of year 1 the Contractor, Management Company and the Local Authority are to meet on site and review all open spaces;
- Following this monitoring stage appropriate adjustments to the management objectives, operations and frequencies of visits are to be agreed in writing between the Contractor, Management Company, and the Local Authority;
- Monitoring visits and amendments to the plan are to be continuous between years 1 to years 5;
- At the end of year 5 there will be a wholesale review of this scheme and any changes to it (including the removal/insertion of operations and/or the change in frequency of operations) will be agreed between the Contractor, Management Company, and the Local Authority.

2.2 The following tables set out the Year 1 maintenance schedule.



Management Scope: Maintenance Activity	Jan	Feb	Mar	April	May	June	July	Aug	Sept	Oct	Nov	Dec
Litter & debris removal												
Pick all litter from areas of hard and soft landscape and remove from site.	.	.	.	.	.	.	.	.	.	.	.	.
Existing Trees and Hedgerows												
Inspect all existing trees and hedgerows.	.	.	.	.	.	.	.	.	.	.	.	.
Action required works to existing trees and hedgerows. Where possible works should be programmed for dormant period (October to March). Carry out works in accordance with BS 3998: 2010.	.	.	.							.	.	.
Carry out hedgerow maintenance biennially and adopt a rotational maintenance strategy to ensure that not all hedgerows are cut in the same growing season.										Biennial rotation cut		
Inspect hedgerow at each visit carryout infill planting measures as necessary.	.	.	.						.	.	.	.
Remove cuttings from site.										.		
Amenity grassland												
Cut grass and remove arisings from site.				.	.	.	.	.	.			
Control/remove weeds.				.	.	.	.	.	.			
Repair worn areas.				.	.	.	.	.	.			
Remove cuttings from site.										.		



Meadow grassland												
Cut grassland twice in each growing month (<u>Year 1 only</u>)				.	.	.	.	.	.			
Cut grass in following years in late June and end of August						.		.				
Autumn cut carried out to leave grassland short over the winter period (40-75cm)											.	
As required a spring cut can be carried out to remove the initial flush of grass cover				.								
Native tree & shrub planting												
Hand weed (Or if necessary, spray ground with herbicide). No strimmers to transplant areas.	.			.		.			.			
Replace shelters and guards as necessary, firm plants as required	.			.		.			.			
Replace dead/dying/vandalised transplants and shelters	.											
Prune back plants encroaching over kerbs/road edges etc				.		.			.			
Remove shelters/stakes/ties from established plants	Approximately 4-5 years after planting											
Coppice shrubs species (except Holly)	Approximately 4-5 years after planting. Carryout works between October to March											
Specimen tree, shrub & hedge planting												
Spray grass and weeds (no strimmers to bases)				.		.			.			
Water and fertilise as necessary as specified			.	.	.	.	.	.	.			



Adjust/ replace stakes/ties/guards as necessary	.	.	.	.	.	.	.	.	.	.	.	.
Check stability/remove stakes/guys when ready	Approximately 4-5 years after planting											
Replace dead/dying/vandalised trees	.	.	.								.	.
Deal with individual problems as they arise	.	.	.	.	.	.	.	.	.	.	.	.
Prune to BS. 3998 2010 or horticultural standards as appropriate for species			.							.		
SUD's Facility												
Inspect SUDS facility and remove all litter and debris. Ensure that channel and outfalls are free of obstructions.	.	.	.	.	.	.	.	.	.	.	.	.
Programme specific operation to remove leaf litter during autumn months. Allow for 2 week creep back period.	.	.								.	.	.
Mow grassland within SUDS facility.			.	.				.	.			
Annual inspection to review management and agree wildlife and biodiversity enhancement measures										.		
Hard landscape & site furniture												
Inspect, clean, repair or replace.	.	.	.	.	.	.	.	.	.	.	.	.
Where repairs cannot be made good at time of visit and additional visit will be programmed as soon as practically possible to make any repair good and the item fit for purpose. During any such delay it is the Contractor's responsibility to ensure that all areas are made safe and remain safe until any such repairs are completed.	.	.	.	.	.	.	.	.	.	.	.	.
Children's Play Area												



Visually inspect children's play areas. Inspection to be carried out by qualified staff member. Observe any hazards, defect or act of vandalism.	.	.	.	.	.	.	.	.	.	.	.	.
	Initially frequency of play area maintenance to be every visit. To be reviewed / determined more accurately once in use and usage pattern can be confirmed. Best practice to be followed with any variation to monthly inspections will be agreed with the appointing authority.											
Any repairs are to be carried out during the inspection. Otherwise the facility is to be made safe and works programmed within a reasonable timeframe.	Any repair works that cannot be carried out at the maintenance visit are to be programmed in as soon as practically possible taking into consideration order lead in times etc. Any temporary closure of and/or partial closure of the facility is to be checked on a daily basis to ensure that the area remain safe and for purpose until such time that the facility is in full working order.											



APPENDIX A

Golby + Luck Landscape Proposals GL1486 01 & 02

Blue Gowt Drain



KEY

- Application site boundary.
- Existing trees and hedgerow to be retained.
- Existing trees and hedgerows to be removed or pruned back.
- 1.2m high 4-bar timber post & rail fence. 3.6m wide 5-bar maintenance gate to be provided. Position to be on site.

PLANT SCHEDULE

Trees

Abbr	Species	Supply	Size	Girth	Number
ACECAM	Acer campestre	HS&L BR	350-425cm	12-14cm	3
ALINGI	Alnus glutinosa	HS&L BR	350-425cm	12-14cm	7
CARBET	Carpinus betulus	HS&L BR	350-425cm	12-14cm	3
PYCOM	Pyrus communis	HS&L BR	350-425cm	12-14cm	2
SORAU	Sorbus aucuparia	HS&L BR	350-425cm	12-14cm	9
TILCO	Tilia cordata	HS&L BR	350-425cm	12-14cm	3
AMARH	Amelanchier arborea 'Robin Hill'	EH&SL BR	425-600cm	14-16cm	2
BETALB	Betula albanensis	EH&SL BR	425-600cm	14-16cm	5
BETPE	Betula pendula	EH&SL BR	425-600cm	14-16cm	16
COCOL	Corylus colurna	EH&SL BR	425-600cm	14-16cm	11
FAGSY	Fagus sylvatica	EH&SL BR	425-600cm	14-16cm	2
UGUES	Ligustrum lucidum 'Excelsium Superbum'	EH&SL BR	425-600cm	14-16cm	6
MAGKO	Magroba kobus	EH&SL BR	425-600cm	14-16cm	3
PHYCAC	Pyrus calleryana 'Chanticleer'	EH&SL BR	425-600cm	14-16cm	6
SORAU	Sorbus aucuparia	EH&SL BR	425-600cm	14-16cm	3
MALTRI	Malus tribolata	EH&SL BR	450-625cm	16-18cm	2
PELAV	Prunus avium	EH&SL BR	450-625cm	16-18cm	5
TITB	Tilia tomentosa 'Brabant'	EH&SL BR	450-625cm	16-18cm	1
MALTRI	Malus tribolata	SM-RR	600cm+	20-25cm	5
Total 96					

Specimen Shrubs

Abbr	Species	Pat Size	Height	Habit	Number
PHOMS	Phormium 'Maori Sunrise'	15L	80-100cm	Top Cm	15
PHYOWE	Phormium 'Yellow Wave'	15L	80-100cm	Top Cm	15
Total 26					

Ornamental Hedgerows

Abbr	Species	Pat Size	Height	Habit	Density	Length	Number
CARBET	Carpinus betulus	0.25Cm	104.99m	420	0.4Cm	377.3m	949
ELAE8	Elaeagnus ebbingei	SL	60-80cm	Bushy	1/m	27.83m	28
Total: 510.12m							1:397

Shrubs

Abbr	Species	Pat Size	Height	Habit	Density	Area	Number
BRSALE	Brachyglottis 'Surrense'	SL	30-40cm	Bushy	0.7Cm	19.68m²	52
BRSAU	Brachyglottis 'Surrense'	SL	30-40cm	Bushy	0.7Cm	19.68m²	46
CEATHR	Ceanothus thyrsiflorus repens	SL	30-40cm	Bushy	0.7Cm	22.5m²	52
CHOAP	Choiya 'Aetec Pearl'	SL	30-40cm	Bushy	0.7Cm	9.34m²	22
CHOIE	Choiya 'temata Sundance'	SL	30-40cm	Bushy	0.7Cm	19.68m²	46
CHOIES	Choiya 'temata Sundance'	SL	30-40cm	Bushy	0.7Cm	47.32m²	106
ELAPUMA	Elaeagnus pungens 'Maculata'	SL	30-40cm	Bushy	0.85Cm	12.85m²	19
EUFONGE	Eunymus fortunei 'Emerald n' Gold'	SL	30-40cm	Bushy	0.7Cm	53.44m²	121
EUFONGE	Eunymus fortunei 'Emerald Gaiety'	SL	30-40cm	Bushy	0.7Cm	9.34m²	22
HEBMW	Hebe 'Mrs Winder'	SL	40-60cm	Bushy	0.7Cm	41.11m²	95
HEBPQ	Hebe 'Purple Queen'	SL	40-60cm	Bushy	0.7Cm	8.01m²	19
HEBALRE	Hebe abicensis 'Red Edge'	SL	30-40cm	Bushy	0.7Cm	35.37m²	81
HEBPS	Hebe pinguifolia 'Sutherland'	SL	30-40cm	Bushy	0.7Cm	18.45m²	43
LAVANHII	Lavandula angustifolia 'Hidcote'	SL	20-30cm	Bushy	0.7Cm	47.32m²	106
LAVANMU	Lavandula angustifolia 'Munstead'	SL	30-40cm	Bushy	0.6Cm	4.42m²	15
LONNIBG	Lonicera nidula 'Baggesen's Gold'	SL	30-40cm	Bushy	0.7Cm	20.25m²	46
PHOFRRR	Photinia x 'raseri' 'Red Robin'	SL	40-60cm	Bushy	0.85Cm	9.64m²	15
PRULAO	Prunus laurocerasus 'Otto Luyken'	SL	30-40cm	Bushy	0.7Cm	40.54m²	91
ROSFOP	Rosa rugosa 'Rosa rugosa'	SL	30-40cm	Bushy	0.7Cm	32.25m²	73
SKUJAR	Skimmia japonica 'Rubra'	SL	30-40cm	Bushy	0.7Cm	33.31m²	75
AUCJACR	Aucuba japonica 'Cronfolia'	10L	40-60cm	Bushy	0.85Cm	25.94m²	42
BRSAU	Brachyglottis 'Surrense'	10L	40-60cm	Bushy	0.7Cm	5.17m²	13
CEATHR	Ceanothus thyrsiflorus repens	10L	40-60cm	Bushy	0.7Cm	19.25m²	46
CHOAP	Choiya 'Aetec Pearl'	10L	40-60cm	Bushy	0.7Cm	3.97m²	10
CHOIES	Choiya 'temata Sundance'	10L	40-60cm	Bushy	0.7Cm	80.88m²	193
ELAPUMA	Elaeagnus pungens 'Maculata'	10L	40-60cm	Bushy	0.85Cm	25.94m²	42
EUFONGE	Eunymus fortunei 'Emerald n' Gold'	10L	40-60cm	Bushy	0.7Cm	28.97m²	70
EUFONGE	Eunymus fortunei 'Emerald Gaiety'	10L	40-60cm	Bushy	0.7Cm	3.97m²	10
HEBMW	Hebe 'Mrs Winder'	10L	40-60cm	Bushy	0.7Cm	28.5m²	66
HEBPQ	Hebe 'Purple Queen'	10L	40-60cm	Bushy	0.7Cm	42.9m²	104
HEBALRE	Hebe abicensis 'Red Edge'	10L	40-60cm	Bushy	0.7Cm	2.94m²	7
HEBPS	Hebe pinguifolia 'Sutherland'	10L	40-60cm	Bushy	0.7Cm	12.04m²	29
ILECRGG	Ilex crenata 'Golden Gem'	10L	30-40cm	Bushy	0.7Cm	21.72m²	51
LAVANHII	Lavandula angustifolia 'Hidcote'	10L	30-40cm	Bushy	0.7Cm	10.84m²	26
LAVANMU	Lavandula angustifolia 'Munstead'	10L	30-40cm	Bushy	0.7Cm	45.71m²	157
LONNIBG	Lonicera nidula 'Baggesen's Gold'	10L	40-60cm	Bushy	0.7Cm	10.58m²	25
PHOTERR	Photinia x 'raseri' 'Red Robin'	10L	40-60cm	Bushy	0.85Cm	16.74m²	28
PHOFRRR	Photinia x 'raseri' 'Red Robin'	10L	40-60cm	Bushy	0.85Cm	26.89m²	43
PRULAO	Prunus laurocerasus 'Otto Luyken'	10L	40-60cm	Bushy	0.7Cm	8.83m²	22
ROSFOP	Rosa rugosa 'Rosa rugosa'	10L	40-60cm	Bushy	0.7Cm	21.72m²	51
Total: 981.23m²							2182

Native Mix Hedgerow (Site Frontage)

Abbr	Species	Supply	Height	Density	Mix %	Length	Number
CORSA	Corvus sanguinea	11-1: 3 Breaks	60-80cm	0.3Cm Triple Staggered at 0.3m offset	10%	13.04m	132
CRAMON	Crataegus monogyna	Phd x2	125-150cm	0.3Cm Triple Staggered at 0.3m offset	35%	45.43m	458
EUFOPS	Eunymus europaeus	11-1: 3 Breaks	60-80cm	0.3Cm Triple Staggered at 0.3m offset	10%	13.04m	132
ILEAQ	Ilex aquifolium	21-3 Breaks	40-60cm	0.3Cm Triple Staggered at 0.3m offset	15%	19.55m	198
LIGUV	Ligustrum vulgare	11-1: 3 Breaks	60-80cm	0.3Cm Triple Staggered at 0.3m offset	15%	19.55m	198
ROSCA	Rosa canina	11-1: 3 Breaks	60-80cm	0.3Cm Triple Staggered at 0.3m offset	5%	6.52m	67
VIBOP	Viburnum opulus	11-1: 3 Breaks	60-80cm	0.3Cm Triple Staggered at 0.3m offset	10%	13.04m	132
Total: 130.37m							1:317

Amenity Shrubs

Abbr	Species	Pat Size	Height	Specification	Density	Area	Number
CORALS	Corallorhiza 'Sibirica'	0.8Cm	57.64m	Branches	0.8Cm	57.64m²	95
CORSAMF	Comus sanguinea 'Midwinter Fire'	3L	60-80cm	Branches	0.8Cm	58.78m²	96
CORSIF	Comus stolonifera 'Flavimexa'	3L	60-80cm	Branches	0.8Cm	57.06m²	95
Total: 172.2m²							286

Turf & Seeding

- Turf to plot frontages to be laid as Rawdon 'Medallion', or similar approved

- Amenity Grass - E11, Flowering Lawn Mixture as supplied by supplied by Emorgate Seeds (www.wildseed.co.uk) or similar approved.

- Meadow grassland - EM1, Meadow mixture supplied by Emorgate Seeds (www.wildseed.co.uk) or similar approved.

- Wetland grass mixture - EM8, seed mixture for wetlands supplied by Emorgate Seeds (www.wildseed.co.uk) or similar approved.

Ecological Enhancements

- Box - Habitat Bat Box 001 (integrated) to be incorporated within wall at gate end. As supplied by NHBIS Ltd (www.nhbis.com) or similar approved.

- Swift Box - Monstrophe Swift Box (integrated) to be installed within the property brick work in line with the manufacturers guidance. As supplied by NHBIS Ltd (www.nhbis.com) or similar approved.

- Hedgerow Access - Small gaps to be created in rear garden fence panels to create a corridor for hedgerows to have free access through sections of the development. Gaps to be 13cm x 11cm, lined up so that hedgerows can wander in a straight line.

Rev. A: 11-06-2021 Updated to latest planning layout.

Pinchbeck

Soft Landscape Proposals

Client: Bellway Homes Eastern Counties

Scale: 1:250 @ A0

Date: 12/02/2021

Checked: DC

GL1486 02A

golby+luck: landscape architects

Specification Notes:

All plants shall conform to BS 3936 and be in accordance with the National Plant Specification. Supplying nurseries shall be registered under the HIA Nursery Certification Scheme. All plants shall be packed and transported in accordance with the Code of Practice for Plant Handling as produced by CPRE.

No species, variety, size or position to be amended without the Landscape Architect's prior approval.

If the formation level is compacted it should be ripped through before tamping. Topsoil depths to be 300mm for shrub beds and 150mm for grass areas.

All landscape proposals must be referred to by the Structural Engineer during foundation design.

All planting has been indicated making every effort to avoid conflict with highway land. Prior to submission it is the clients responsibility to ensure that all landscaping is reviewed by the project manager/highway engineer to ensure there is not conflict with highway land and future adoption.

Before trees are planted, the Landscape Architect shall ascertain the location of drains from the site manager, and shall if necessary make minor adjustments to tree positions to ensure that they are planted at least 1.2m from drains. They should however be planted no closer to houses/garages than is shown on the drawing, and if shown located in shrub beds, the slope of the latter should be adjusted if necessary to accommodate the revised tree position.

If planting conditions are particularly poor e.g. waterlogged/frozen ground or poor soils, the Site Manager must be notified. All works will halt until conditions are considered acceptable.

All planting must be mulched to a depth of 75mm and in accordance with horticultural best practice guidelines ensuring plants are not buried.

All bare root stock shall be root dipped in an approved water-retaining polymer. If planting is required outside the October-March season, bare root trees will be replaced by a containerised equivalent to be approved by the project landscape architect.

Planting in pedestrian visibility splays: Any planting stock specified in pedestrian visibility splays and exceeding 0.6m in height is to be cut down to 0.45m in height at the time of planting. It shall be maintained at a height not exceeding 0.6m in height in perpetuity.

Trees: All tree locations and species must be taken into consideration by the project Structural Engineer to ensure that foundation design accords with the specifications set out under Chapter 4.2 of the NHBIS Standards. It is the Contractors responsibility to ensure that all underground services have been located and identified in advance of tree pit excavation. No tree species/location/specification will be amended without prior approval from the project Landscape Architect and/or the Client. Root barriers are to be provided as directed by the project engineer.

Specimen Shrubs: All specimen shrubs to be planted in accordance with horticultural best practice guidelines. No feature shrubs or climbers species, size or location should be altered without prior approval from the Landscape Architect. Planting beds to be mulched with 75mm layer of bark.

Hedgerows: All ornamental hedgerow shrubs to be planted in accordance with horticultural best practice guidelines. No hedgerow shrub species, size or location should be altered without prior approval from the Landscape Architect. Feathered stock to be attached to a single line post & wire support fence using an approved clip tie and cut back to 1m in height and a tidy hedgerow form at time of planting. Planting beds to be mulched with 75mm layer of bark.

Instant hedging: Supplied by Ready Hedge (www.readyhedgepld.com) or similar in 1m troughs. Troughs of hedging to be planted within a 30cm wide bed and mulched with 75mm layer of bark. At the time of planting hedge to be lightly trimmed to sides and top to help integrate hedgerow lengths together.

Native Hedgerows (transplants): All native hedgerow shrubs to be planted in accordance with horticultural best practice guidelines. The landscape proposals must be referred to by the Structural Engineer during foundation design. No shrub species, size or location should be altered without prior approval from the Landscape Architect. Individual species to be planted in groups of 9:18 within the bed. Ground to be cleared, removing all weeds and other debris in advance of planting and cultivated to a fine tilth. If required suitable soil conditions, such as mulchroom compost, should be incorporated. Transplanted stock to be planted into an appropriate sized pit or notch and protected using green spiral guards secured with a 15mm diameter min. bamboo can inserted inside the guard and up to a third in its length into the ground. Shrubs are to be planted using a green shrub shelter and timber stake fitted in accordance with the manufacturers guidelines. Following planting the ground is to be watered to field capacity.

Shrubs & herbaceous (on plot): All ornamental and amenity shrubs to be planted in accordance with horticultural best practice guidelines. No shrub species, size or location should be altered without prior approval from the Landscape Architect. Individual species to be planted in groups of 3:7 within mixed species beds. Planting beds to be mulched with 75mm layer of bark.


Native Shrubs: All shrubs to be planted in accordance with horticultural best practice guidelines. The landscape proposals must be referred to by the Structural Engineer during foundation design. No shrub species, size or location should be altered without prior approval from the Landscape Architect. Individual species to be planted in groups of 9:18 within the bed. Ground to be cleared, removing all weeds and other debris in advance of planting and cultivated to a fine tilth. If required suitable soil conditions, such as mulchroom compost, should be incorporated. Transplanted stock to be planted into an appropriate sized pit or notch and protected using green spiral guards secured with a 15mm diameter min. bamboo can inserted inside the guard and up to a third in its length into the ground. Shrubs are to be planted using a green shrub shelter and timber stake fitted in accordance with the manufacturers guidelines. Following planting the ground is to be watered to field capacity.

Marginal & Aquatic species: All marginals to be planted in accordance with horticultural best practice guidelines. No marginals species, size or location should be altered without prior approval from the Landscape Architect. Individual species to be planted in groups of 12:21.

Bulbs: All bulbs to be planted in accordance with horticultural best practice guidelines. To be planted at 55 bulbs/m2 and arranged in single species drifts.

Native Hedgerow (Site Frontage): All Hedgerow shrubs to be supplied as bare root stock unless stated and to be planted in accordance with horticultural best practice guidelines. The landscape proposals must be referred to by the Structural Engineer during foundation design. No hedgerow shrub species, size or location should be altered without prior approval from the Landscape Architect. Hedgerow shrubs to be planted on an approved clip tie and cut back to 1m in height and a tidy hedgerow form at time of planting. Upon completion trenches to be mulched with 75mm layer of bark.

- Feathered Stock
- Transplant Stock
- Box Stock

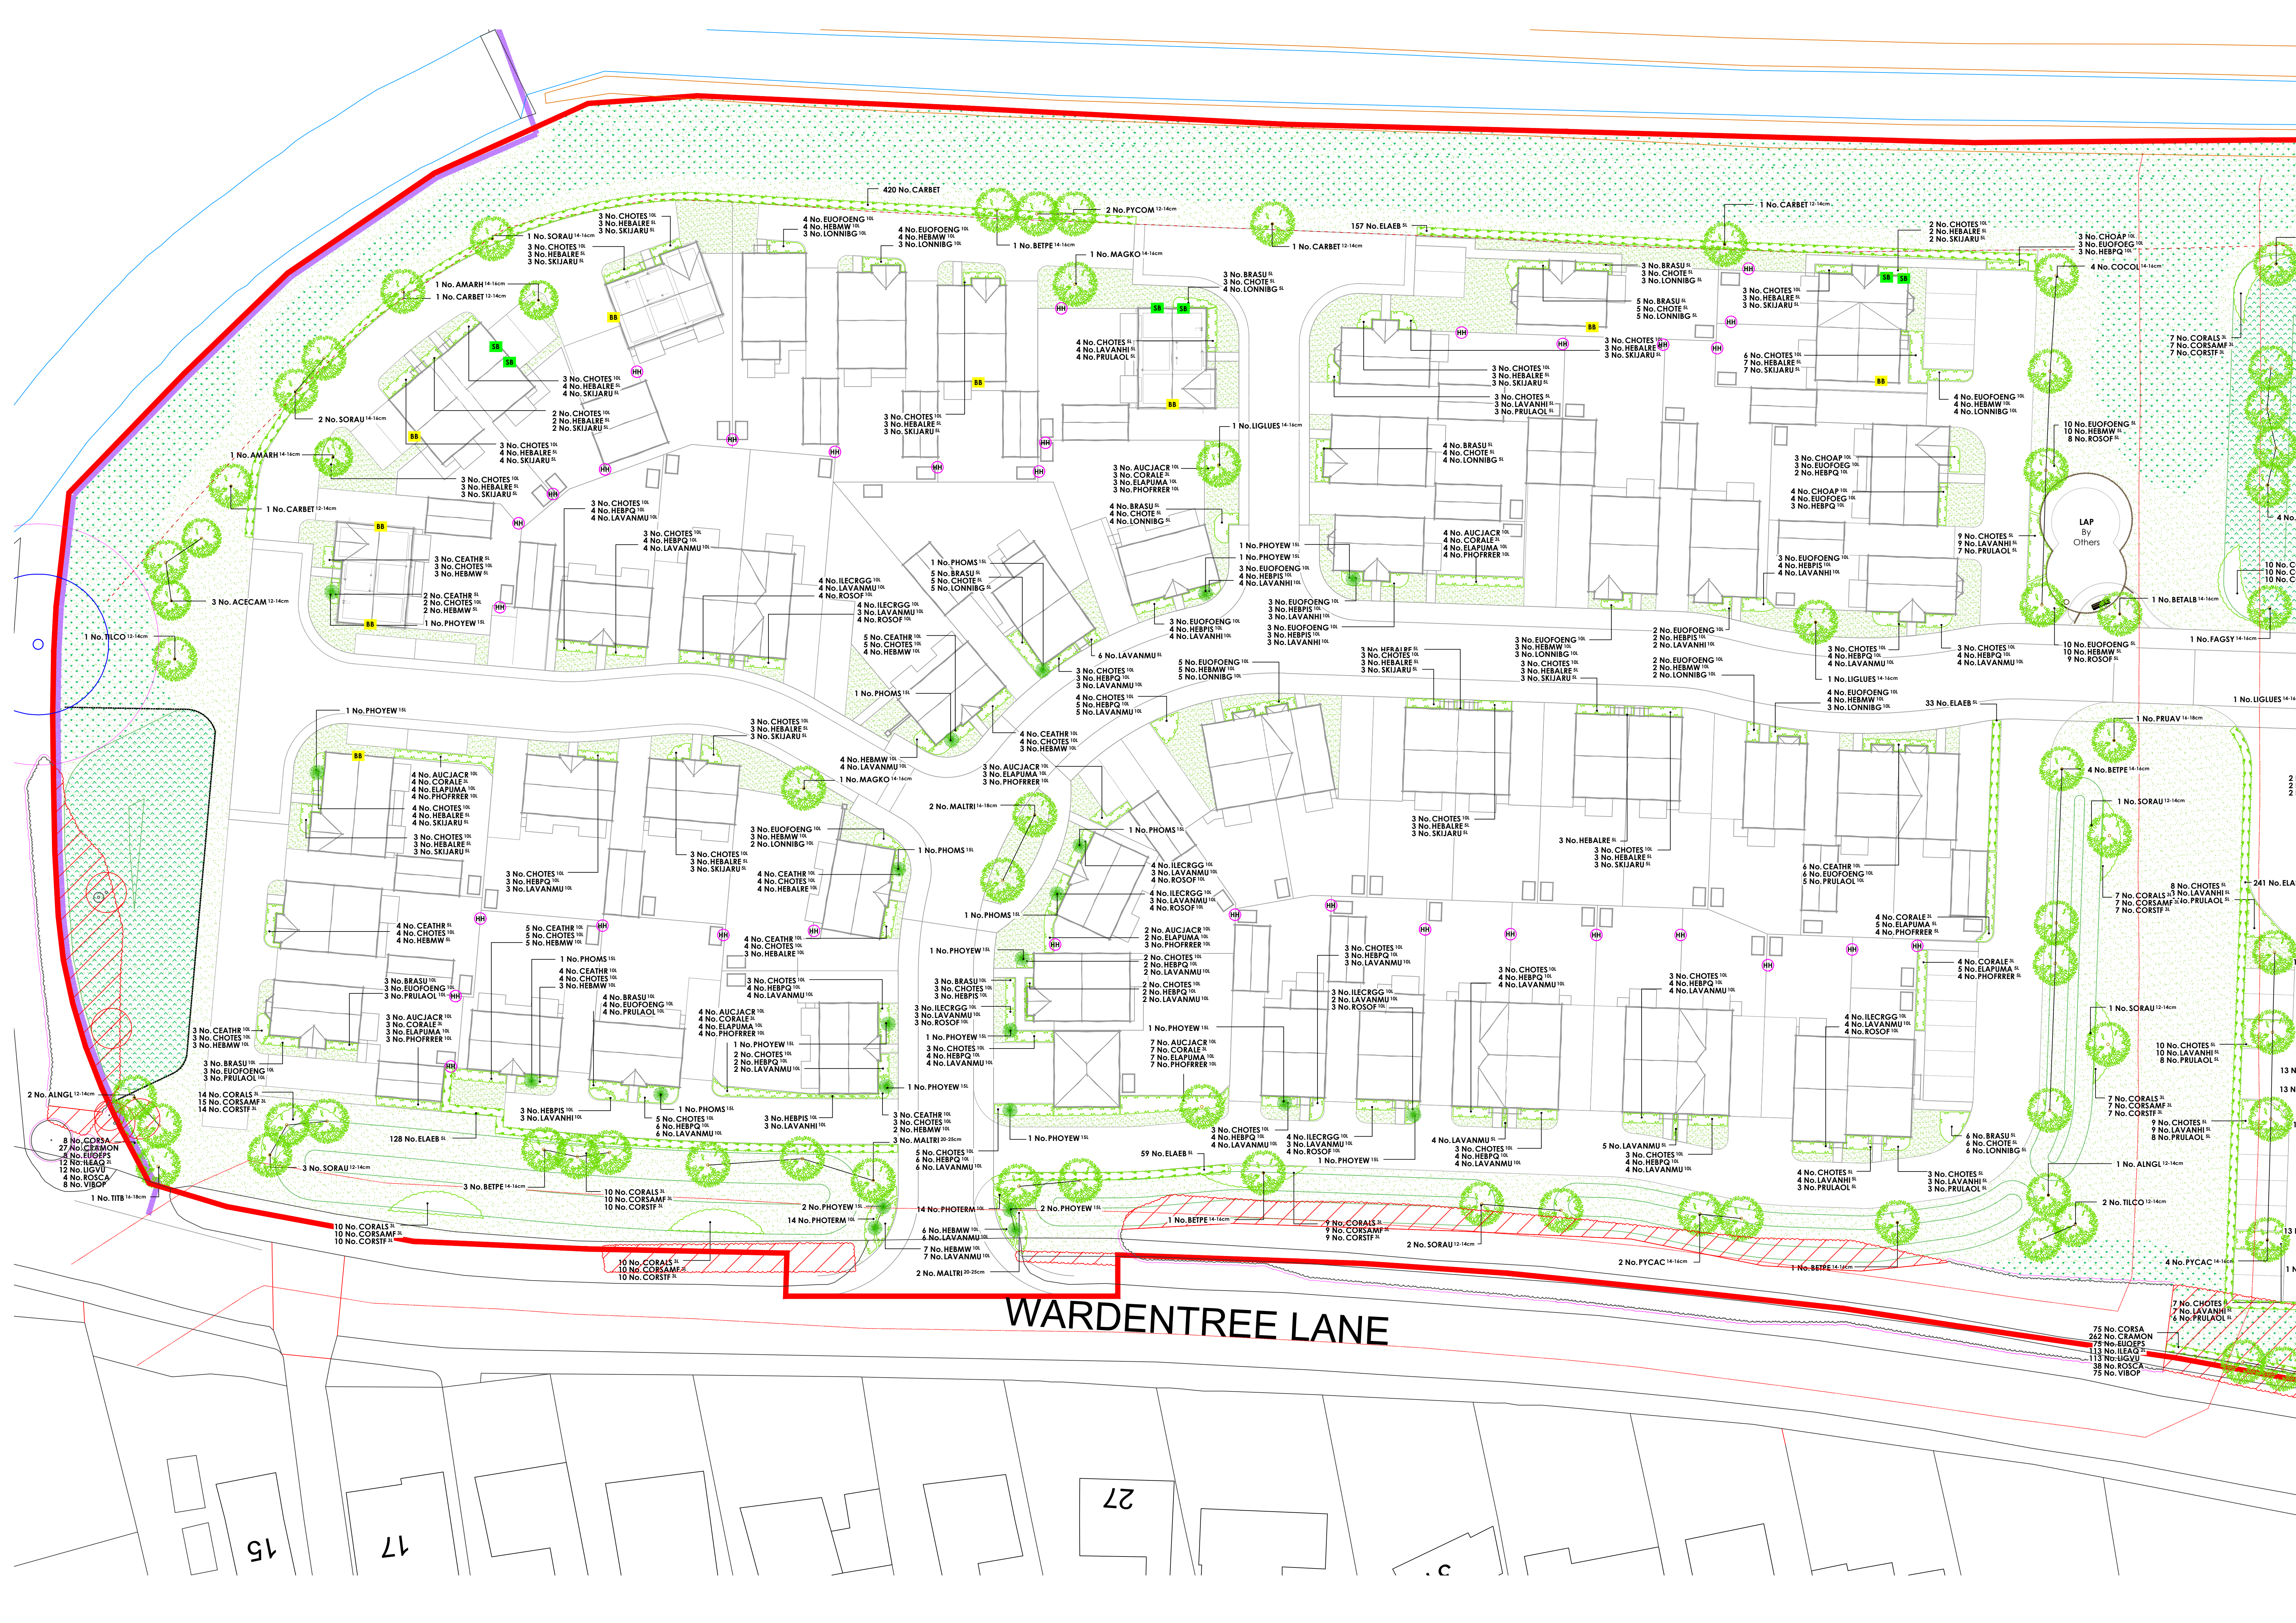

KEY

- Application site boundary.
- Existing trees and hedgerow to be retained.
- Existing trees and hedgerows to be removed or pruned back.
- 1.2m high 4-bar timber post & rail fence. 3.6m wide 5-bar maintenance gate to be provided. Position to be on site.

PLANT SCHEDULE

Trees

Abbr	Species	Supply	Size	Girth	Number
ACECAM	Acer campestre	HS&L BR	350-425cm	12-14cm	3
AINGL	Alnus glutinosa	HS&L BR	350-425cm	12-14cm	7
CABRET	Carpinus betulus	HS&L BR	350-425cm	12-14cm	5
PYCOM	Pyrus communis	HS&L BR	350-425cm	12-14cm	2
SORAU	Sorbus aucuparia	HS&L BR	350-425cm	12-14cm	9
TILCO	Tilia cordata	HS&L BR	350-425cm	12-14cm	3
AMARH	Amelanchier arborea 'Robin Hill'	EH&L BR	425-600cm	14-16cm	2
BETAL	Betula alba/betula	EH&L BR	425-600cm	14-16cm	5
BETPE	Betula pendula	EH&L BR	425-600cm	14-16cm	16
COCOL	Corylus colurna	EH&L BR	425-600cm	14-16cm	11
FAGSY	Fagus sylvatica	EH&L BR	425-600cm	14-16cm	2
UGUES	Ligustrum lucidum 'Excelsium Superbum'	EH&L BR	425-600cm	14-16cm	6
MAGQO	Magroba kabus	EH&L BR	425-600cm	14-16cm	3
PYCAC	Pyrus calleryana 'Chanticleer'	EH&L BR	425-600cm	14-16cm	6
SORAU	Sorbus aucuparia	EH&L BR	425-600cm	14-16cm	3
MALTRI	Malus troyana	EH&L BR	450-625cm	16-18cm	2
PRUAV	Prunus avium	EH&L BR	450-625cm	16-18cm	5
TITB	Tilia tomentosa 'Brabant'	SM- BR	600cm+	20-25cm	1
MALTRI	Malus troyana	SM- BR	600cm+	20-25cm	5
					Total: 96

Specimen Shrubs

Abbr	Species	Pat Size	Height	Habit	Number
PHOMIS	Phormium 'Maori Sunrise'	15L	125-150cm	Top Cm	1
PHOYEW	Phormium 'Yellow Wave'	15L	80-100cm	Top Cm	15
					Total: 26

Ornamental Hedgerows

Abbr	Species	Pat Size	Height	Habit	Density	Length	Number
CABRET	Carpinus betulus	SL	125-150cm	Phd x2	54	104.99m	420
ELAE8	Elaeagnus ebbingei	SL	60-80cm	Bushy	0.4Cm	377.3m	949
					1/m	27.83m	28
					Total: 510.12m	Total: 1397	

Shrubs

Abbr	Species	Pat Size	Height	Habit	Density	Area	Number
CORALE	Coronilla varia 'Bicolor'	SL	40-60cm	Branched	0.8Cm	32.71m²	52
BRASU	Brachyglottis 'Sunshine'	SL	30-40cm	Bushy	0.7Cm	19.68m²	46
CEATHR	Ceanothus thyrsiflorus repens	SL	30-40cm	Bushy	0.7Cm	22.5m²	52
CHOAP	Choisya 'Arauc' Pearlf	SL	30-40cm	Bushy	0.7Cm	9.34m²	22
CHOTE	Choisya ternata	SL	30-40cm	Bushy	0.7Cm	19.68m²	46
CHOTES	Choisya ternata 'Sundance'	SL	30-40cm	Bushy	0.7Cm	47.32m²	106
ELAPUMA	Elaeagnus pungens 'Maculata'	SL	40-60cm	Bushy	0.85Cm	12.85m²	19
EUOPENG	Eunymus fortunei 'Emerald n' Gold'	SL	30-40cm	Bushy	0.7Cm	53.44m²	121
EUOPENG	Eunymus fortunei 'Emerald n' Gold'	SL	30-40cm	Bushy	0.7Cm	9.34m²	22
HEBMW	Hebe 'Mrs Winder'	SL	40-60cm	Bushy	0.7Cm	41.11m²	95
HEBPQ	Hebe 'Purple Queen'	SL	40-60cm	Bushy	0.7Cm	8.01m²	19
HEBALRE	Hebe abrotan 'Red Edge'	SL	30-40cm	Bushy	0.7Cm	35.37m²	81
HEBALRE	Hebe abrotan 'Red Edge'	SL	30-40cm	Bushy	0.7Cm	18.45m²	43
LAVANHI	Lavandula angustifolia 'Hidcote'	SL	20-30cm	Bushy	0.7Cm	47.32m²	106
LAVANMU	Lavandula angustifolia 'Munstead'	SL	30-40cm	Bushy	0.64Cm	4.42m²	15
LONNIBG	Lonicera nitida 'Baggesen's Gold'	SL	40-60cm	Bushy	0.7Cm	20.25m²	48
PHORFR	Phoroxia x 'traser' 'Red Robin'	SL	40-60cm	Bushy	0.85Cm	9.64m²	15
PRULAO	Prunus laurocerasus 'Otto Luyken'	SL	30-40cm	Bushy	0.7Cm	40.54m²	91
ROSF	Rosmarinus officinalis	SL	30-40cm	Bushy	0.7Cm	32.25m²	73
SKIAUR	Skinning japonica 'Rubra'	SL	30-40cm	Bushy	0.7Cm	33.31m²	75
AUCJACR	Aucuba japonica 'Crotonifolia'	10L	40-60cm	Bushy	0.85Cm	25.94m²	42
BRASU	Brachyglottis 'Sunshine'	10L	40-60cm	Bushy	0.7Cm	5.17m²	13
CEATHR	Ceanothus thyrsiflorus repens	10L	40-60cm	Bushy	0.7Cm	19.25m²	46
CHOAP	Choisya 'Arauc' Pearlf	10L	40-60cm	Bushy	0.7Cm	3.97m²	10
CHOTES	Choisya ternata 'Sundance'	10L	40-60cm	Bushy	0.7Cm	80.88m²	193
ELAPUMA	Elaeagnus pungens 'Maculata'	10L	40-60cm	Bushy	0.85Cm	25.94m²	42
EUOPENG	Eunymus fortunei 'Emerald n' Gold'	10L	30-40cm	Bushy	0.7Cm	28.97m²	70
EUOPENG	Eunymus fortunei 'Emerald n' Gold'	10L	30-40cm	Bushy	0.7Cm	3.97m²	10
HEBMW	Hebe 'Mrs Winder'	10L	40-60cm	Bushy	0.7Cm	28.5m²	66
HEBPQ	Hebe 'Purple Queen'	10L	40-60cm	Bushy	0.7Cm	42.9m²	104
HEBALRE	Hebe abrotan 'Red Edge'	10L	30-40cm	Bushy	0.7Cm	2.94m²	7
HEBALRE	Hebe abrotan 'Red Edge'	10L	30-40cm	Bushy	0.7Cm	12.04m²	29
HEBALRE	Hebe abrotan 'Red Edge'	10L	30-40cm	Bushy	0.7Cm	21.72m²	51
LAVANHI	Lavandula angustifolia 'Hidcote'	10L	30-40cm	Bushy	0.7Cm	10.84m²	26
LAVANMU	Lavandula angustifolia 'Munstead'	10L	30-40cm	Bushy	0.7Cm	45.71m²	157
LONNIBG	Lonicera nitida 'Baggesen's Gold'	10L	40-60cm	Bushy	0.7Cm	10.58m²	25
PHOTER	Phormium tenax 'Rainbow Maiden'	10L	40-60cm	Lvs	0.8Cm	16.74m²	28
PHORFR	Phoroxia x 'traser' 'Red Robin'	10L	40-60cm	Bushy	0.85Cm	26.89m²	43
PRULAO	Prunus laurocerasus 'Otto Luyken'	10L	40-60cm	Bushy	0.7Cm	8.83m²	22
ROSF	Rosmarinus officinalis	10L	40-60cm	Bushy	0.7Cm	21.72m²	51
					Total: 981.23m²	Total: 2182	

Native Mix Hedgerow (Site Frontage)

Abbr	Species	Supply	Height	Density	Mix %	Length	Number
CORSA	Coronilla varia	11-1: 3 Breaks	40-60cm	0.3Cm Triple Staggered at 0.3m offset	10%	13.04m	132
CRAMON	Crataegus monogyna	Phd x2	125-150cm	0.3Cm Triple Staggered at 0.3m offset	35%	45.43m	458
EUOPES	Eunymus europaeus	11-1: 3 Breaks	40-60cm	0.3Cm Triple Staggered at 0.3m offset	10%	13.04m	132
LEAQ	Ilex aquifolium	2L: 3 Breaks	40-60cm	0.3Cm Triple Staggered at 0.3m offset	15%	19.55m	198
LICUV	Ligustrum vulgare	11-1: 3 Breaks	40-60cm	0.3Cm Triple Staggered at 0.3m offset	15%	19.55m	198
ROSCA	Rosa carolina	11-1: 3 Breaks	40-60cm	0.3Cm Triple Staggered at 0.3m offset	5%	6.50m	67
VIBOP	Viburnum opulus	11-1: 3 Breaks	40-60cm	0.3Cm Triple Staggered at 0.3m offset	10%	13.04m	132
					Total: 130.37m	Total: 1317	

Amenity Shrubs

Abbr	Species	Pat Size	Height	Specification	Density	Area	Number
CORALS	Coronilla varia 'Sibirica'	SL	40-60cm	Branched	0.8Cm	57.06m²	95
CORSAMF	Comus sanguinea 'Midwinter Fire'	SL	60-80cm	Branched	0.8Cm	58.78m²	96
CORSIF	Comus stolonifera 'Flavamea'	SL	60-80cm	Branched	0.8Cm	57.06m²	95
					Total: 172.9m²	Total: 286	

Turf & Seeding

- Turf to plot frontages to be laid as Rawdon 'Medallion', or similar approved
- Amenity Grass - E1, Flowering Lawn Mixture as supplied by supplied by Emorgate Seeds (www.wildseed.co.uk) or similar approved.
- Meadow grassland - EM1, Meadow mixture supplied by Emorgate Seeds (www.wildseed.co.uk) or similar approved.
- Wetland grass mixture - EM8, Seed mixture for wetlands supplied by Emorgate Seeds (www.wildseed.co.uk) or similar approved.

Ecological Enhancements

- Box - Habitat Box 00 (Integrated) to be incorporated within wall at gable end. As supplied by NBS Ltd (www.nbs.co.uk) or similar approved.
- Swift Box - Manthorpe Swift Box (Integrated) to be installed within the property brick work in line with the manufacturer's guidance. As supplied by NBS Ltd (www.nbs.co.uk) or similar approved.
- Hedgerow Access - Small gaps to be created in rear garden fence panels to create a corridor for hedgerows to have free access through sections of the development. Gaps to be 13cm x 11cm, lined up so that hedgerows can wander in a straight line.

Specification Notes:

All plants shall conform to BS 3936 and be in accordance with the National Plant Specification. Supplying nurseries shall be registered under the HTA Nursery Certification Scheme. All plants shall be packed and transported in accordance with the Code of Practice for Plant Handling as produced by CPSE.

No species, variety, size or position to be amended without the Landscape Architects prior approval.

If the formation level is compacted it should be ripped through before topsoiling. Topsoil depths shall be 300mm for shrub beds and 150mm for grass areas.

All landscape proposals must be referred to by the Structural Engineer during foundation design.

All planting has been indicated making every effort to avoid conflict with highway land. Prior to submission it is the Client's responsibility to ensure that all landscaping is reviewed by the project manager/highway engineer to ensure there is not conflict with highway land and future adoption.

Before trees are planted, the Landscape Contractor shall ascertain the location of drains from the site manager, and shall if necessary make minor adjustments to tree positions to ensure that they are planted at least 1.2m from drains. They should however be planted no closer to houses/garages than is shown on the drawing, and if shown located in shrub beds, the slope of the latter should be adjusted if necessary to accommodate the revised tree position.

If planting conditions are particularly poor e.g. waterlogged/frozen ground or poor soils, the Site Manager must be notified. All works will halt until conditions are considered acceptable.

All planting must be mulched to a depth of 75mm and in accordance with horticultural best practice guidelines ensuring plants are not buried.

All bare root stock shall be root dipped in an approved water-retaining polymer. If planting is required outside the October-March season, bare root trees will be replaced by a containerised equivalent to be approved by the project landscape architect.

Planting in pedestrian visibility splays: Any planting stock specified in pedestrian visibility splays and exceeding 0.6m in height is to be cut down to 0.45m in height at the time of planting. It shall be maintained at a height not exceeding 0.6m in height in perpetuity.

Trees: All tree locations and species must be taken into consideration by the project Structural Engineer to ensure that foundation design accords with the specifications set out under Chapter 4.2 of the NBS Standards. It is the Contractor's responsibility to ensure that all underground services have been located and identified in advance of tree pit excavation. No tree species/location/specification will be amended without prior approval from the project Landscape Architect and/or the Client. Root barriers are to be provided as directed by the project engineer.

Specimen Shrubs: All specimen shrubs to be planted in accordance with horticultural best practice guidelines. No feature shrubs or climbers species, size or location should be altered without prior approval from the Landscape Architect. Planting beds to be mulched with 75mm layer of bark.

Hedgerows: All ornamental hedgerow shrubs to be planted in accordance with horticultural best practice guidelines. No hedgerow shrub species, size or location should be altered without prior approval from the Landscape Architect. Feathered stock to be attached to a single line post & wire support fence using an approved clip tie and cut back to 1m in height and a tidy hedgerow form at time of planting. Planting beds to be mulched with 75mm layer of bark.

Instant hedging: Supplied by Ready Hedge (www.readyhedgepld.co.uk) or similar in 1m troughs. Troughs of hedging to be planted within a 50cm wide bed and mulched with 75mm layer of bark. At the time of planting hedge to be lightly trimmed to sides and top to help integrate hedgerow lengths together.

Native Hedgerows (Transplants): All native hedgerow shrubs to be planted in accordance with horticultural best practice guidelines. The landscape proposals must be referred to by the Structural Engineer during foundation design. No shrub species, size or location should be altered without prior approval from the Landscape Architect. Individual species to be planted in groups of 9-18 within the bed. Ground to be cleared, removing all weeds and other debris in advance of planting and cultivated to a fine till. If required suitable soil conditions, such as mulchroom compost, should be incorporated. Transplanted stock to be planted into an appropriate sized pit or notch and protected using green spiral guards secured with a 15mm diameter min. bamboo can inserted inside the guard and up to a third in its length into the ground. Shrubs are to be planted using a green shrub shelter and timber stake fitted in accordance with the manufacturer's guidelines. Following planting the ground is to be watered to field capacity.

Shrubs & herbaceous (on plot): All ornamental and amenity shrubs to be planted in accordance with horticultural best practice guidelines. No shrub species, size or location should be altered without prior approval from the Landscape Architect. Individual species to be planted in groups of 3-7 within mixed species beds. Planting beds to be mulched with 75mm layer of bark.

Native Shrubs: All shrubs to be planted in accordance with horticultural best practice guidelines. The landscape proposals must be referred to by the Structural Engineer during foundation design. No shrub species, size or location should be altered without prior approval from the Landscape Architect. Individual species to be planted in groups of 9-18 within the bed. Ground to be cleared, removing all weeds and other debris in advance of planting and cultivated to a fine till. If required suitable soil conditions, such as mulchroom compost, should be incorporated. Transplanted stock to be planted into an appropriate sized pit or notch and protected using green spiral guards secured with a 15mm diameter min. bamboo can inserted inside the guard and up to a third in its length into the ground. Shrubs are to be planted using a green shrub shelter and timber stake fitted in accordance with the manufacturer's guidelines. Following planting the ground is to be watered to field capacity.

Marginal & Aquatic species: All marginal to be planted in accordance with horticultural best practice guidelines. No marginal species, size or location should be altered without prior approval from the Landscape Architect. Individual species to be planted in groups of 12-21.

Bulbs: All bulbs to be planted in accordance with horticultural best practice guidelines. To be planted at 55 bulbs/m² and orange in single species drifts.

Native Hedgerow (Site Frontage): All Hedgerow shrubs to be supplied as bare root stock unless stated and to be planted in accordance with horticultural best practice guidelines. The landscape proposals must be referred to by the Structural Engineer during foundation design. No hedgerow shrub species, size or location should be altered without prior approval from the Landscape Architect. Hedgerow shrubs to be planted on a triple staggered row, 220mm apart with no less than 1.5m linear metre as illustrated in the detail below and within a 80cm wide bed. The feathered Hawthorn are to have a upright central stem furnished with evenly spread and balanced lateral growth the full length of the stem. Shrubs to be attached to a double line support (one for the feathered Hawthorn at 1.2m high and one for transplants or 60cm high fence using an approved clip tie and cut back to 1m in height and a tidy hedgerow form at time of planting. Upon completion trenches to be mulched with 75mm layer of bark.

Feathered Stock
● Feathered Stock
● Transplant Stock
● Text Stock

Landscaped Practice

tel: 01530 265688 | email: info@golbyandluck.co.uk | web: www.golbyandluck.co.uk

Office: 207 Lakeside Road, Boscawen, Llanelli, SA40 9EP

Rev. A: 11-06-2021 updated to latest planning layout.

Project: Pinchbeck

Drawing title: Soft Landscape Proposals (Sheet 1 of 1)

Client: Bellway Homes Eastern Counties

Scale: 1:250 @ A0

Date: 12/02/2021

Checked: DC

Drawn: GL1486 01A

golby+luck

landscape architects

APPENDIX B

Open Space Plan




HOUSE TYPE SCHEDULE	
TA - Tailor - 3B	9
TH - Thesplan - 3B	11
CH - Chandler - 3B	10
QU - Quilter - 3B	10
MA - Mason - 3B	10
SC - Scrivener - 4B	14
MI - Milliner - 4B	8
TOTAL MKT HOMES	72
BT-GF - Bookbinder - 1B2P	3
BT-FF - Stationer - 1B2P	3
MN - Manciple - 2B4P	6
TI - Titman - 3B4P	10
CT - Cartographer - 4B5P	2
TOTAL AH HOMES	24
GRAND TOTAL	96

SUDs in POS = 0.1658 Ha.
POS exc. SUDs = 1.0183 Ha.
POS Total = 1.184 Ha.

B. 03/06/21 LPA amendments.
A. 11/05/21 LPA amendments.
Revisions:
LMC - Architect Limited
87 Main Street, Lyddington,
Rutland, LE15 9L S
Tel/Fax 01572 820185
Mobile 07985 943743

Client:
Bellway Homes Limited (Eastern Counties)
Title:
Land off
Wardentree Lane
Pinchbeck, Spalding
Drawing:
Planning Site Layout

Scales:	Sheet Size:	Date:	Drawn:
1:500	A1	26/01/21	LMC
Drawing Number:	487-SK-01	Rev:	B

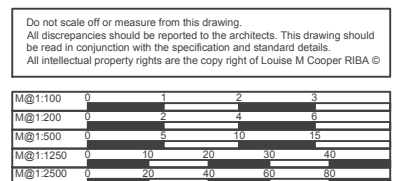



Tel: 01530 265688 Web: www.golbyandluck.co.uk

Email: info@golbyandluck.co.uk

Office: 207 Leicester Road, Ibstock, Leicestershire, LE67 6HP
Golby and Luck LTD (Company No. 9037776) Registered in England and Wales