
M.D. FOULKES Building Design & Construction Services

Job Ref. P.C. Drg. N° 4


Additional fascia details and proposed alterations to already installed window frames

scale 1·50 full size.

NAME IN TIMES NEW ROMAN. LETTERS IN FORMED ACRYLIC SHEET WITH L.E.D. "HALO" LIGHTS. SEE SAMPLES PROVIDED.

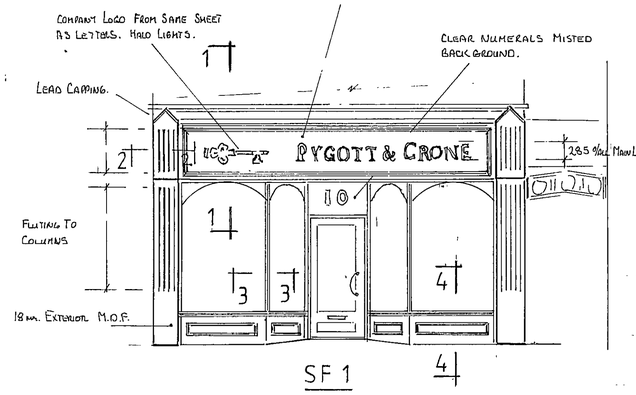


SF 1

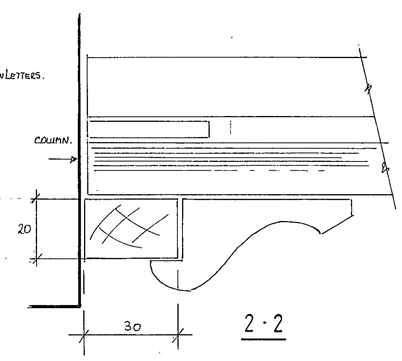


2·2


FASCIA & MOULDINGS TO BRIDGE ST — RECTORY RED.
COLUMNS & FRAMES — GREAT WHITE.

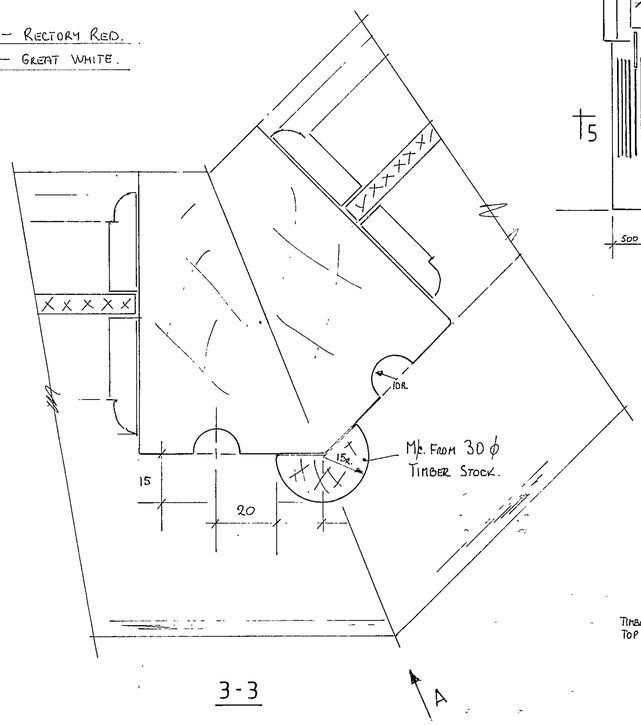


3-3

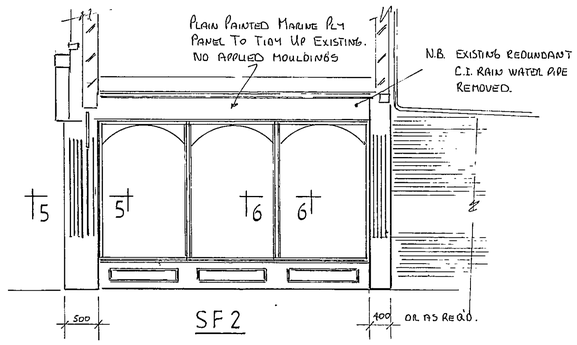


SF 2

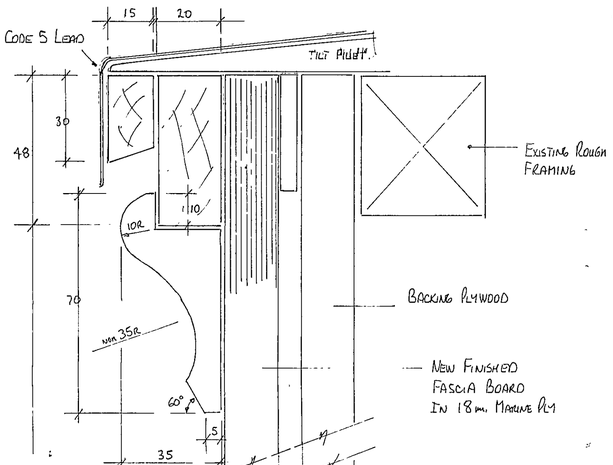


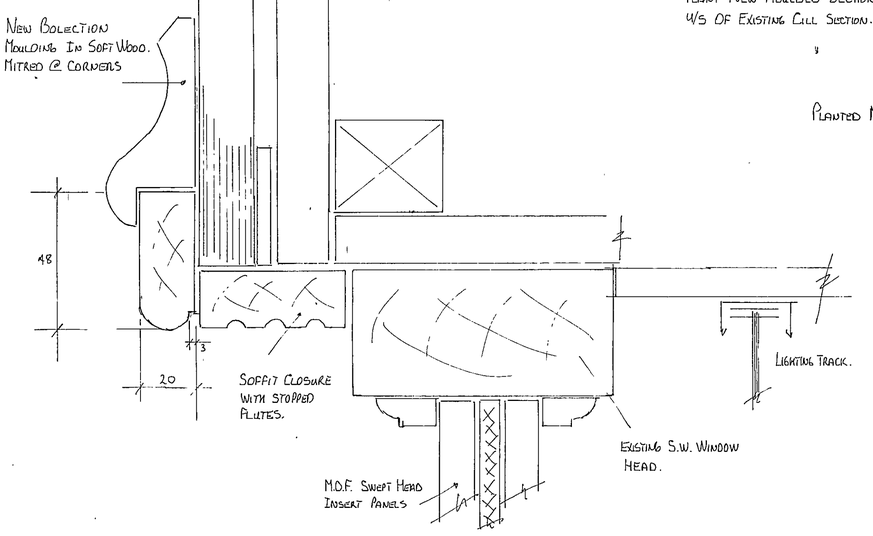


1 - 1

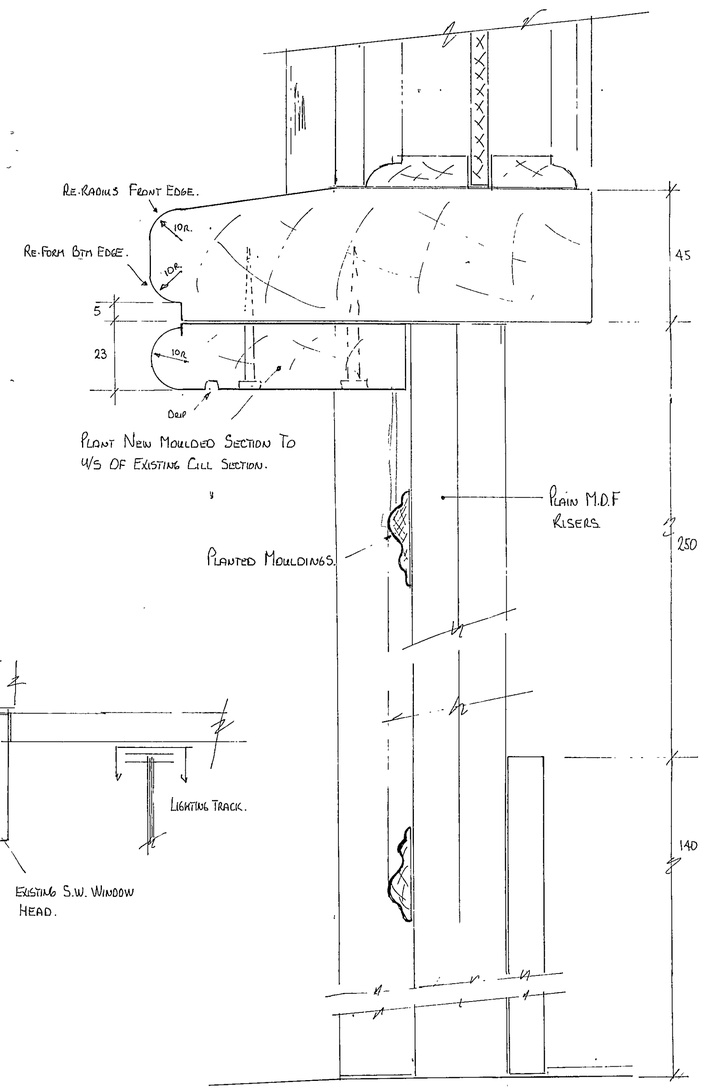


4 - 4

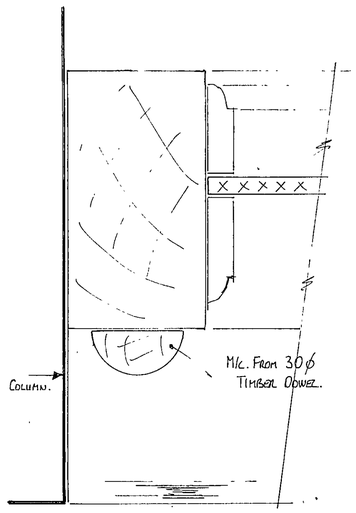

5 - 5
(TYPICAL)

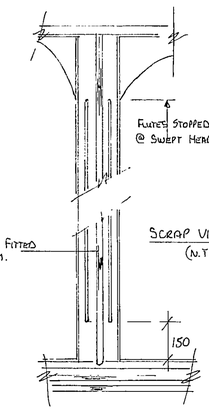

SCRAP VIEW ON A.
(N.T.S)

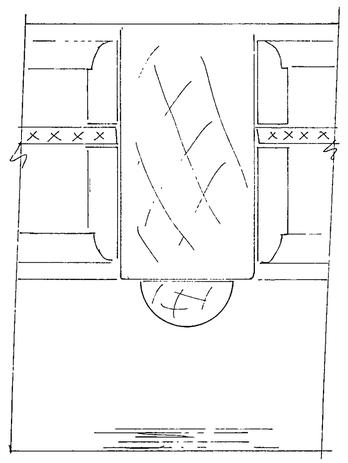

6 - 6
(TYPICAL)

P.C.4.