

PLANNING AMENDMENT

CONCRETE RED ROOF TILES

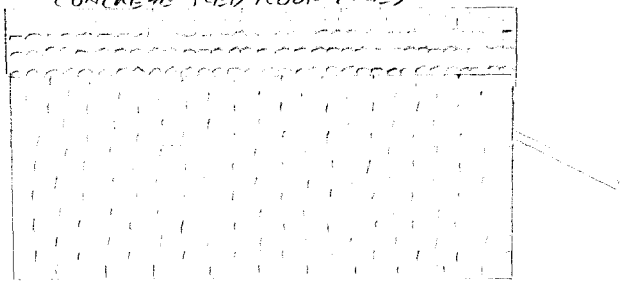

SIDE ELEVATION


APPLICATION Nº H16/411/98

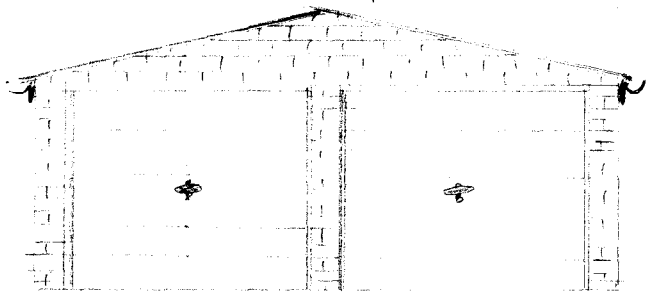


FRONT ELEVATION

2 METAL UP AND OVER DOORS

SOUTH LAKELAND DISTRICT COUNCIL
HOUSING & PLANNING
15 JUL 1998
Ref: 0411/98

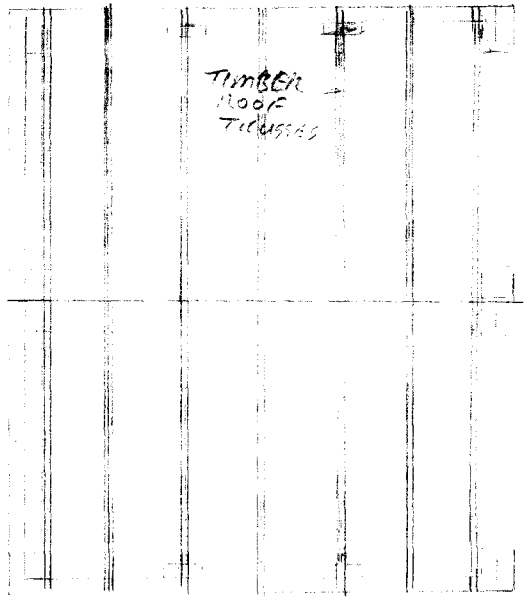

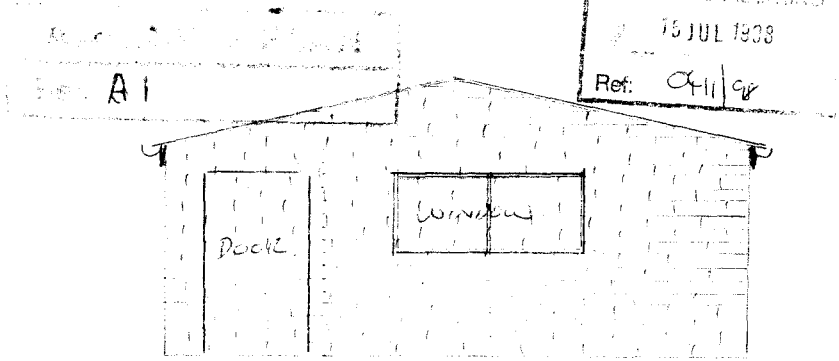

REAR ELEVATION

MAIN BRICK
RED RUSTIC
OR SIMILAR


C.E. BARNES
95 LONDON ROAD
SILVERDALE
LANCS

A2

04/11/98

L.E. BARNES
95 LONDON ROAD
SITTINGBOURNE.

AMENDMENT TO WINDOW.

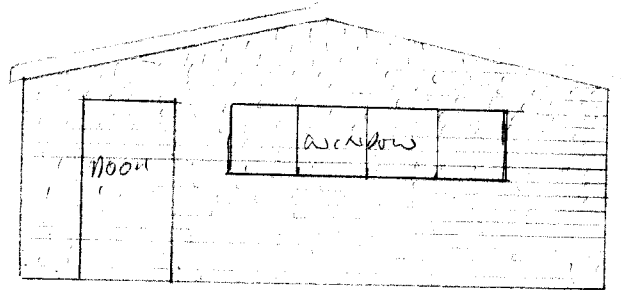

REAR ELEVATION


WINDOW
7'10" X 2'


Compton Balmoral Garage 12½ Pitch, 19'1" & 21'1" Spans.

Std plan ref : BAL 19–21/16–24.

SPAN Model No.		LENGTH Ext. A		Int B	
19ft	21ft	Imp.	Met.	Imp.	Met.
16	21	16'5"	5004	15'9"	4801
17	22	18'5"	5613	17'9"	5410
18	23	20'5"	6223	19'9"	6020
19	24	22'11"	6985	22'3"	6782
20	25	24'5"	7442	23'9"	7239

SPAN	Ext. width C		Int. width D		Clearance E		Opening F		Apex G	
	Imp	Met	Imp	Met	Imp	Met	Imp	Met	Imp	Met
19 ft.	19'1"	5817	18'6"	5639	7'10"	2388	8'2"	2489	8'8⅛"	2645
21 ft.	21'1"	6426	20'6"	6248	8'10"	2692	9'2"	2794	8'10⅜"	2410

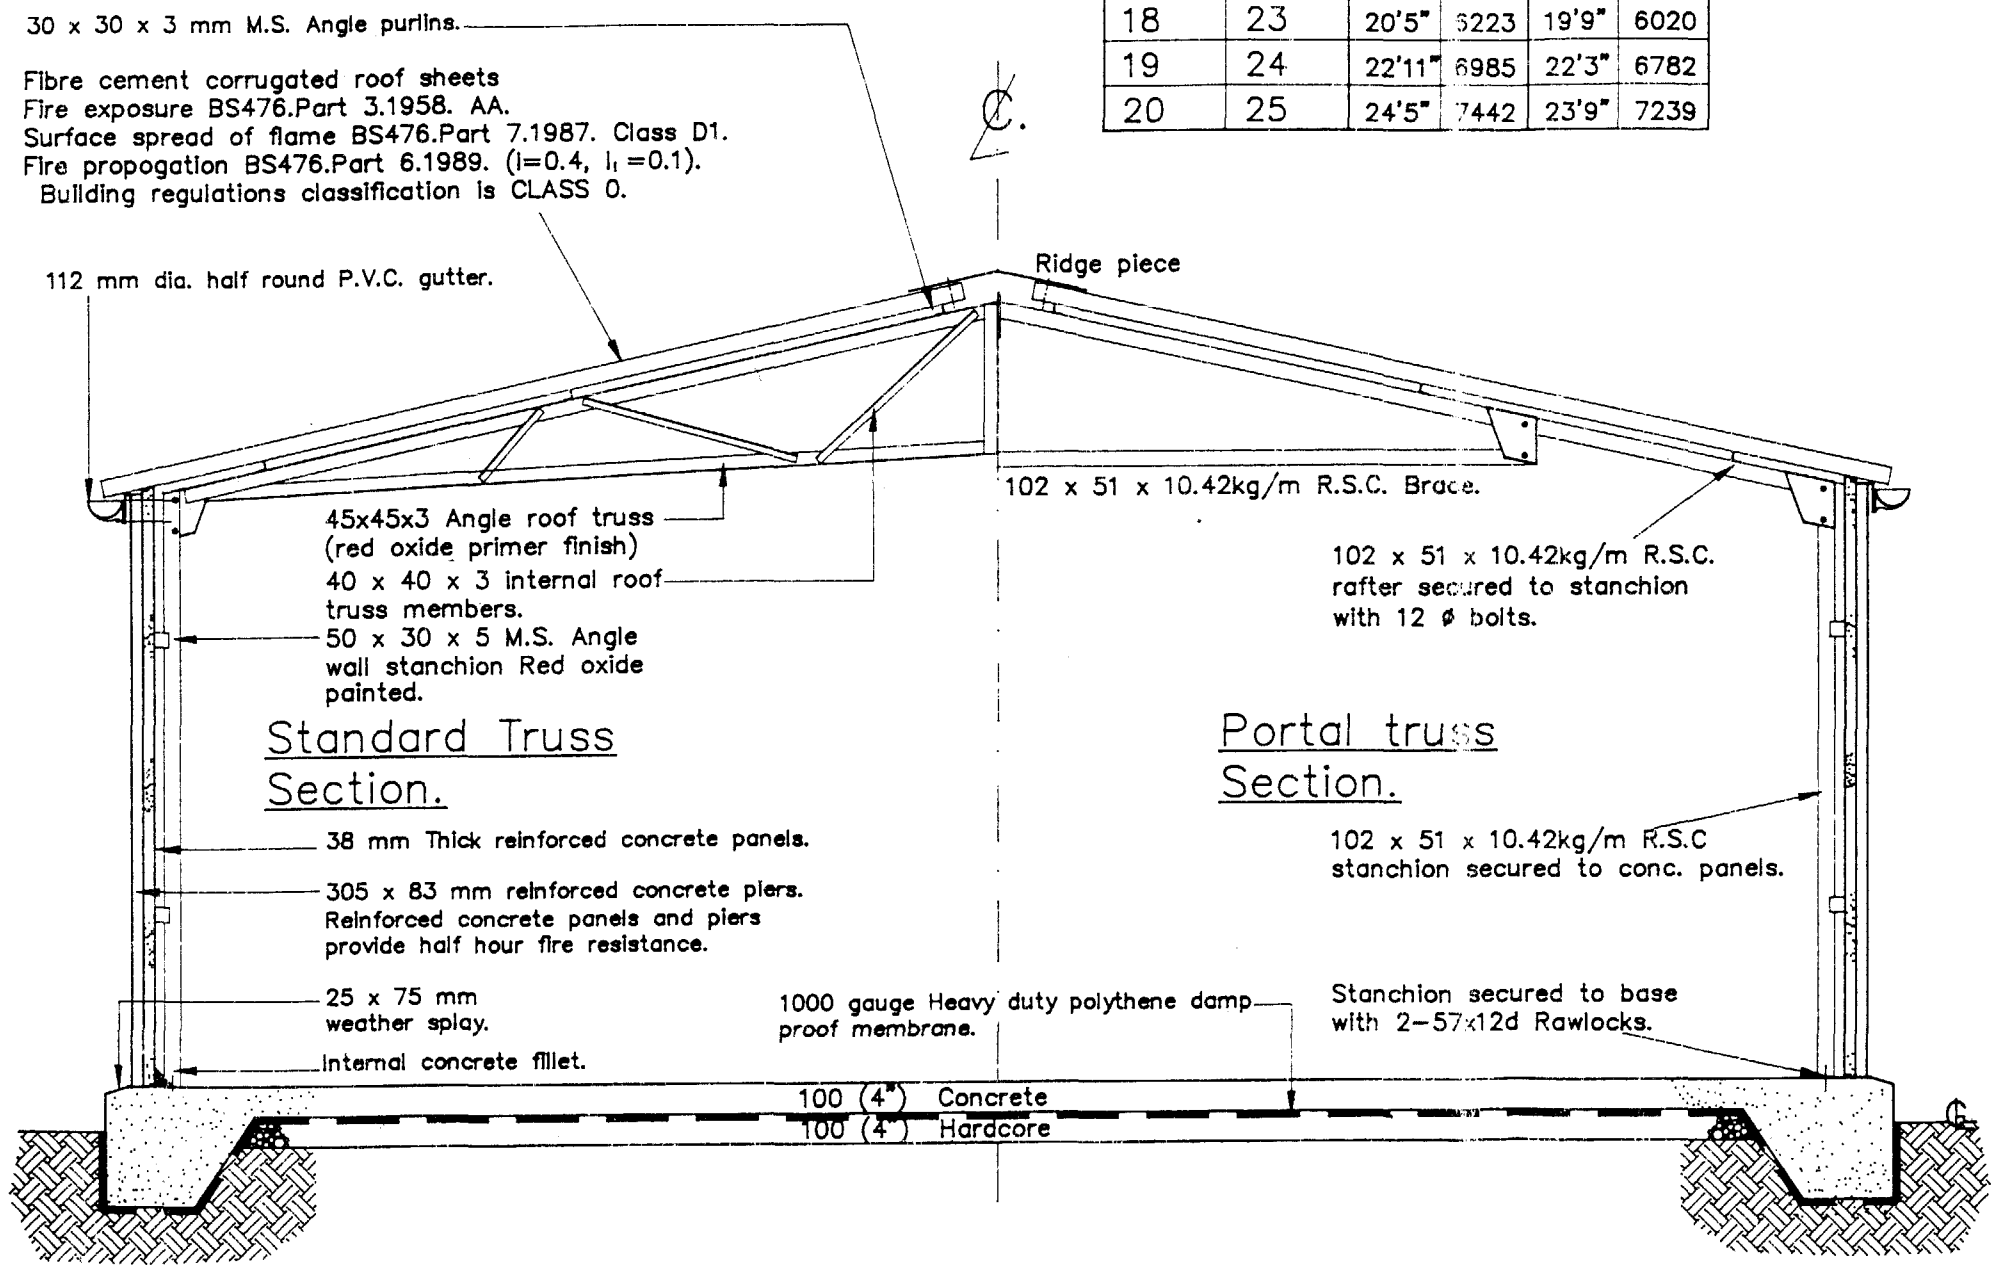

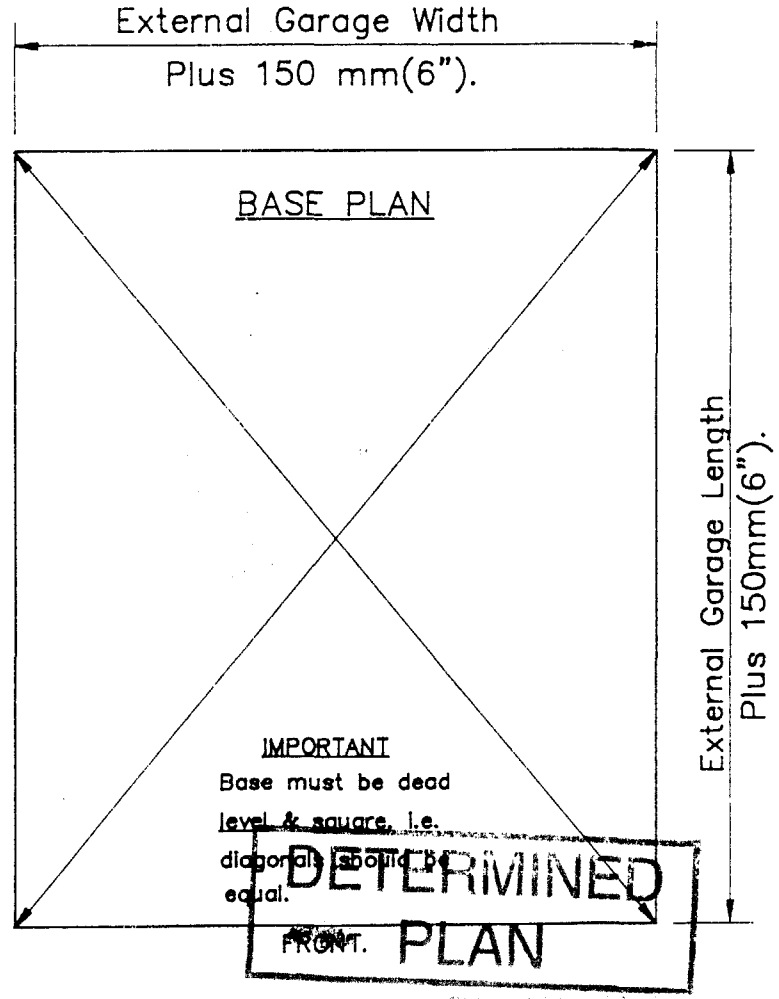

DETERMINED


04/11/98

NOTE: Depth and width of perimeter concrete to suit site conditions, and/or Local Authority approval.


NOTE: If building over 7300mm. long, (24ft) or has main doors both ends, then Portal Frames to be added at 2430mm. ctrs. (8ft).

LIBRARY No.

BAL19.

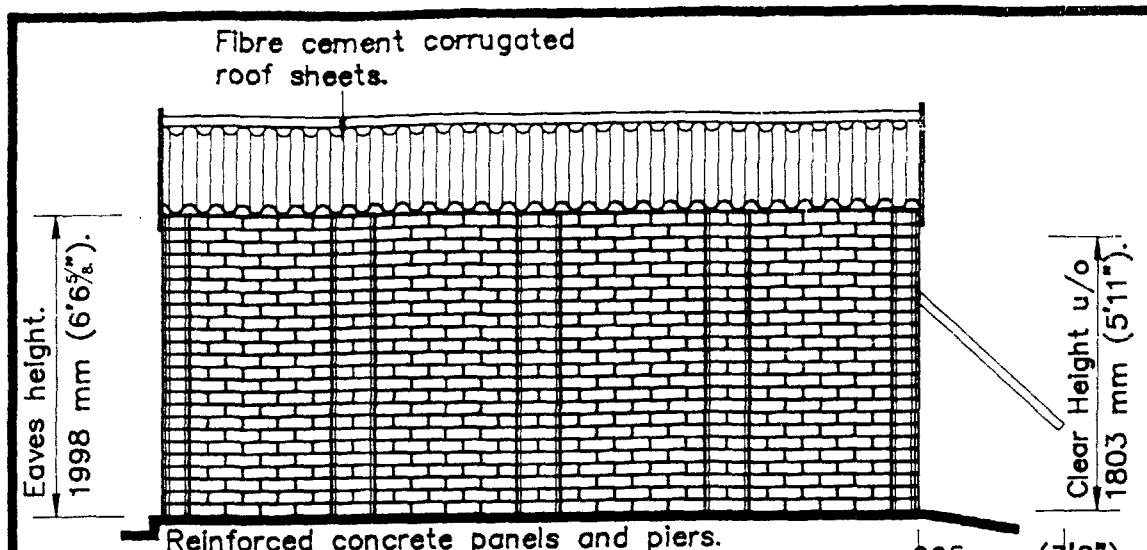


SIDE ELEVATION

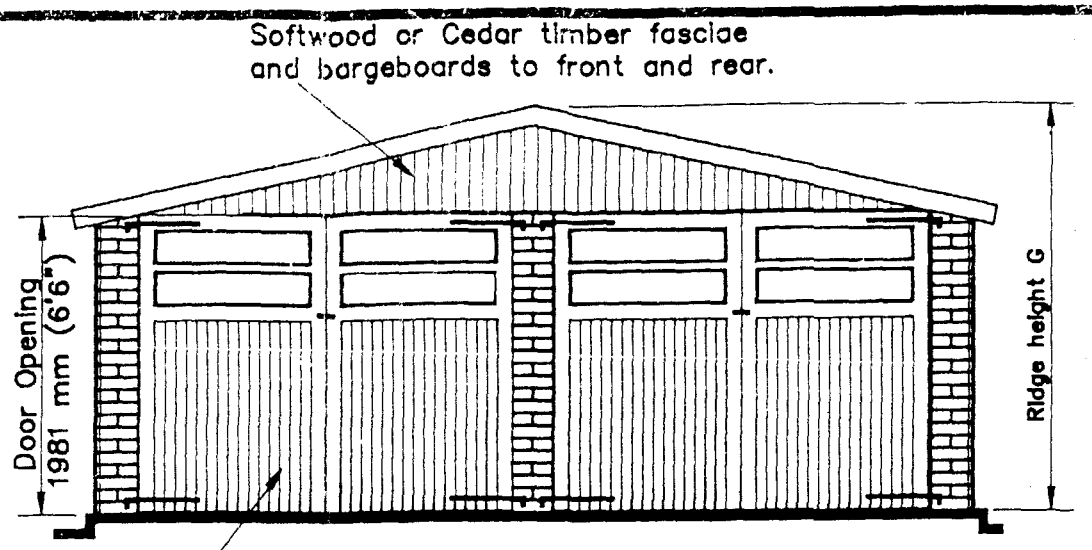


FRONT ELEVATION

Cedar Traditional Door shown

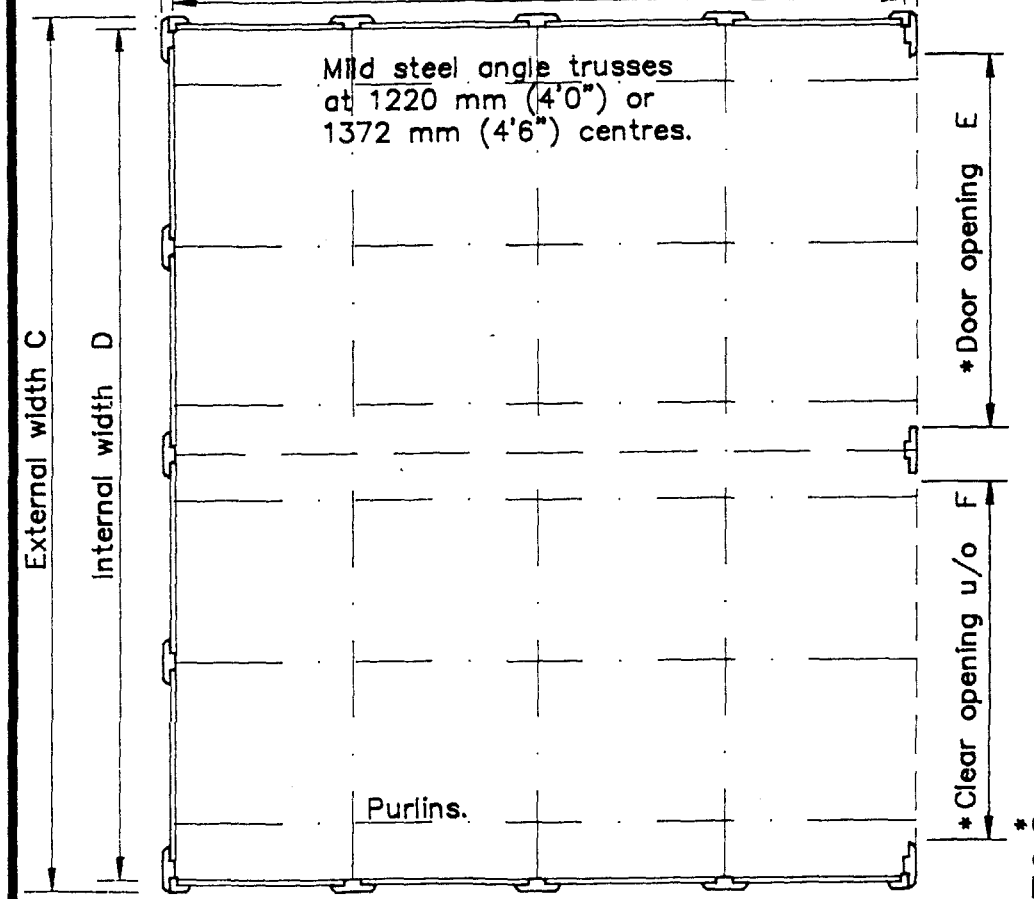

PLAN

*Georgian door opening 51mm (2") less than stated above

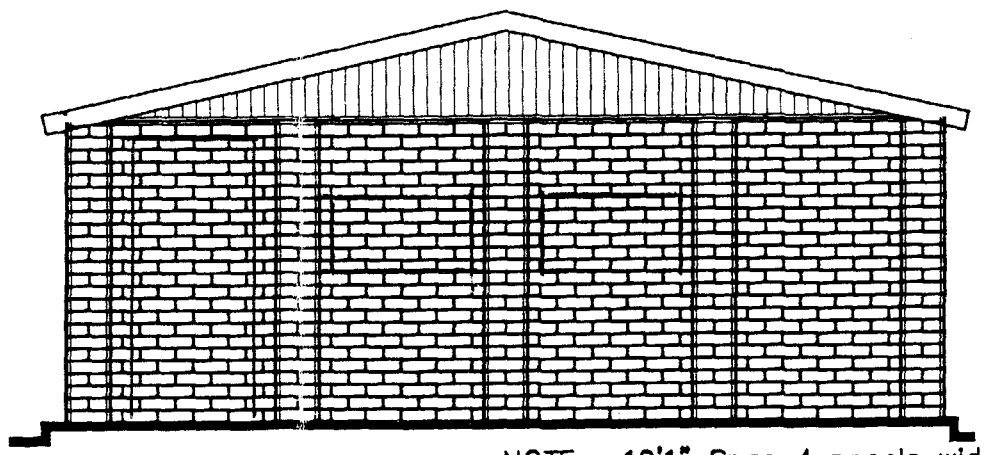

REAR ELEVATION






NOTE : 19'1" Span 4 panels wide
21'1" Span 5 panels wide

Panel finish: Red brick

All steelwork red oxide primed at point of manufacture.

Position of window(s) and additional door(s) to be indicated on this plan by applicant before submission to Local Authority, together with the house and site details.(Not by Compton).


DOOR OPTIONS

	tick.
Type A.  2 pairs of Softwood traditional doors, Softwood fascia.	
Type B.  2 pairs of Cedarwood traditional doors, Cedarwood fascia.	
Type D.  2 pairs of Cedarwood up and over doors, spring operated and fully retractable. Cedarwood fascia.	
Type G.  2 Georgian style metal up and over doors, spring operated and fully retractable. Cedarwood fascia.	
Type M.  2 Metal up and over doors, spring operated and fully retractable. Cedarwood fascia.	✓


Compton

STATION WORKS, FENNY COMPTON
NEAR LEAMINGTON SPA, WARWICKSHIRE. CV33 0XB


OPTIONAL EXTRAS.



PD 2
PD 3



TYPE F WINDOW.



TYPE G WINDOW.



TYPE A WINDOW.

Proposed. ~~Compton Balmoral 19'1" & 21'1" Spans~~ .....Garage
For Mr C E Barnes
95 Gorsedon Road
Stoke Lane
16-4-92 Leics LE11 2TN

ISSUE	1			
DATE	JAN. '92			

LIBRARY No. BAL 19–21/16–24

NOTE: Please read reverse of this document for further construction and base requirements.

©This drawing is copyright and must not be reproduced or communicated to a third party without written permission.