

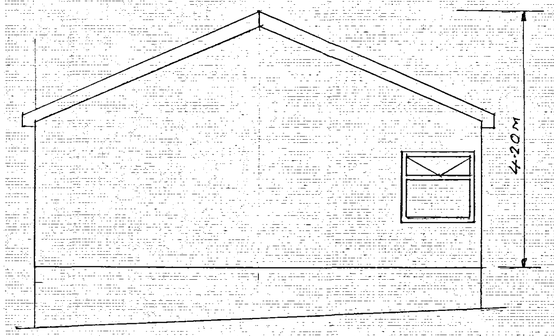



WEST ELEVATION
7·30m

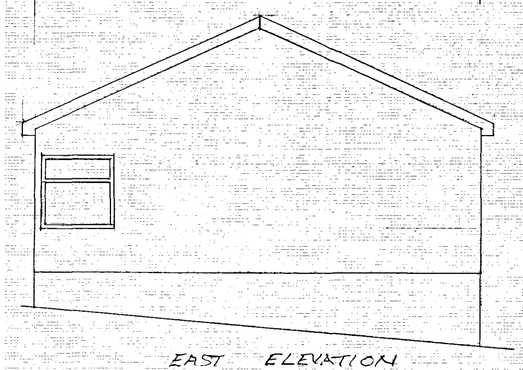


EAST ELEVATION

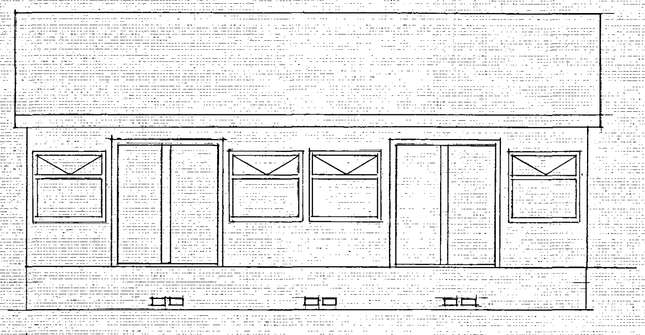


SOUTH ELEVATION
9·14m

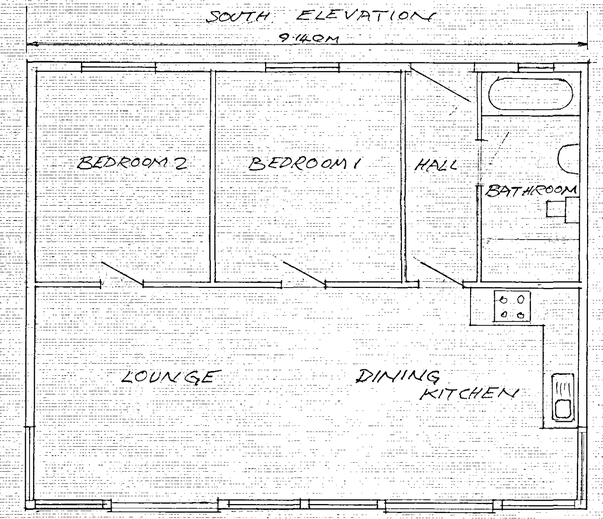

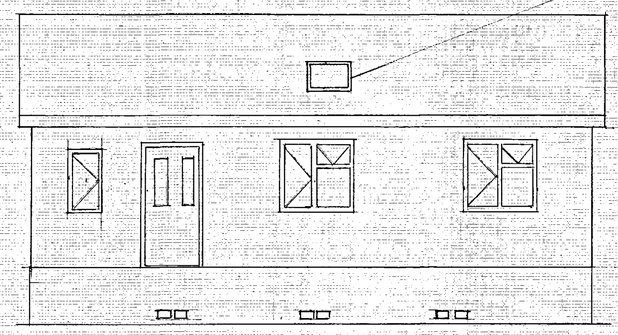

NORTH ELEVATION

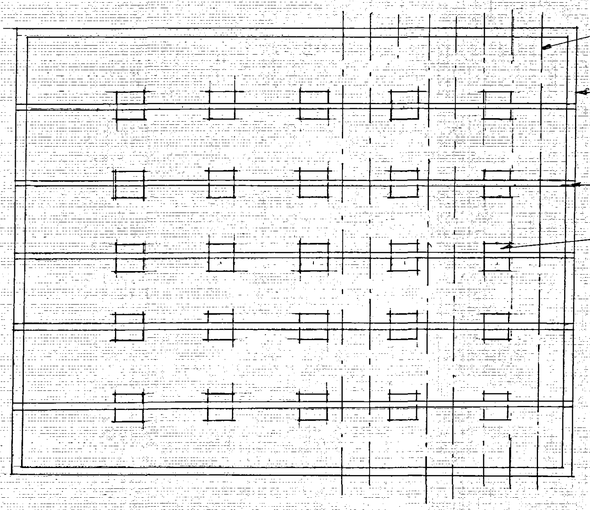

740x980 MEANS OF ESCAPE WINDOW ACCESSABLE FROM ROOF SPACE VIA HATCH ABOVE BEDROOM 1

ROOF COVERED WITH GREY MAXI-TILE SCULPTURED STEEL ROOF SHEETS OVER 18mm PLY

1200x1200mm UPVC DOUBLE GLAZED WINDOWS

WALLS CLAD WITH SOLID PLASTIC 150mm SHIPLAP

2100x1800mm UPVC SLIDING PATIO DOORS

RENDERED CONC BLOCK SUPPORT WALL

75x50mm ROOF JOISTS INFILLED WITH 75mm INSULATION AT 40·5mm CENTRES


450x220x150mm RENDERED CONC BLOCK SUPPORT WALL ON 450x225mm CONC FOUNDATION


100x75 JOIST SUPPORTS AT 1200mm CENTRES SITTING ON 100x75mm WALL PLATE

CONC DOLLIES

SUPERSEDED

Ref: 105/108

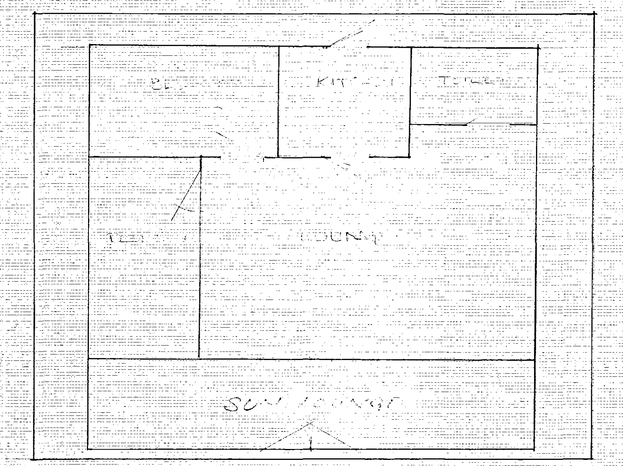

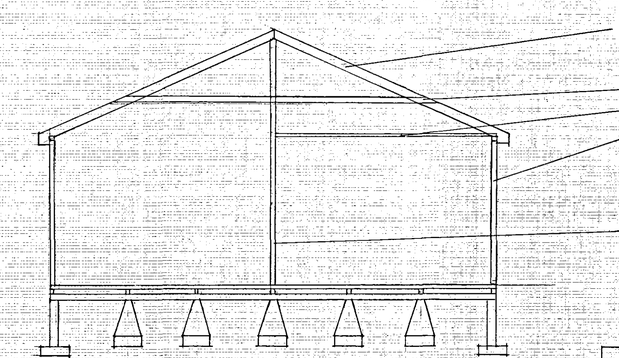

150x50mm RAFTERS SET ON 100x150mm WALL PLATES

100x50mm TIES

75x50 CEILING JOISTS 600mm c

WALLS OF 18mm PLY ON 100x50mm SECOND FRAMES FILLED WITH 100mm INSULATION LINED WITH TWO LAYERS OF 12mm PLASTERBOARD

CENTRAL WALL 100x50mm FRAME STIFFENED WITH 18mm WEB GUSSETS TO MAKE REINFORCED BINDER-PURLIN

SCALE 1:50

TIMBER BUNGALOW AT
3 THE RESERVOIR,
SURFLEET, SPALDING,
LINCS. PE11 4DJ