
Contractors are responsible for checking all dimensions on site prior to work commencing.Due to areas of the structure being covered, unexposed or otherwise inaccessible the notes / specifications of existing materials are subject to confirmation of site when it is feasible to expose the relevant areas of construction. All material schedules are given in good faith and for pricing purposes only. It is the responsibility of the contractor to check their accuracy before ordering any materials. Remway Design accepts no responsibility for the accuracy of these material schedules.

Schedule 06 - Windows		
Mark	Width	Height
W1	1002.5	1200.0
W2	1002.5	1200.0
W3	1002.5	1200.0
W4	685.0	1500.0
W5	685.0	1500.0
W6	460.0	1050.0
W7	1002.5	1200.0
W8	1002.5	1200.0
W9	1002.5	1050.0
W10	1002.5	1200.0
W11	685.0	1050.0
W12	1810.0	1350.0
W13	1247.5	1200.0
W14	1002.5	1050.0
W15	460.0	1050.0
W16	600.0	1000.0
W17	600.0	1000.0
W18	600.0	1000.0
W19	600.0	1000.0
W20	600.0	1000.0
W21	600.0	1000.0
W22	600.0	1000.0
W25	1200.0	1200.0
W26	685.0	1200.0
Grand total: 24		




Elevation 01 - Front

1 : 100

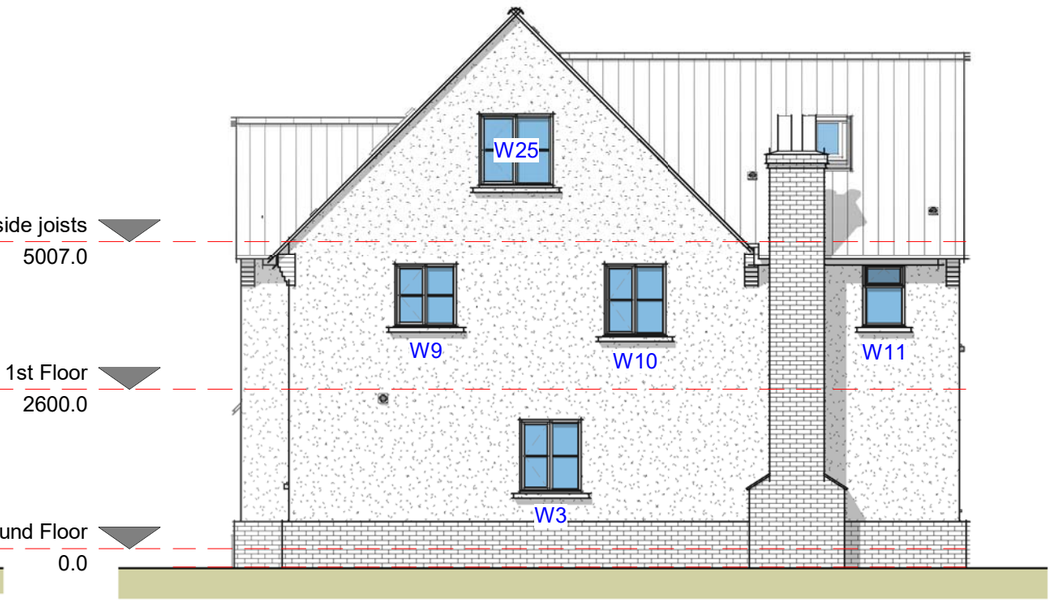


Elevation 02 - Right

1 : 100

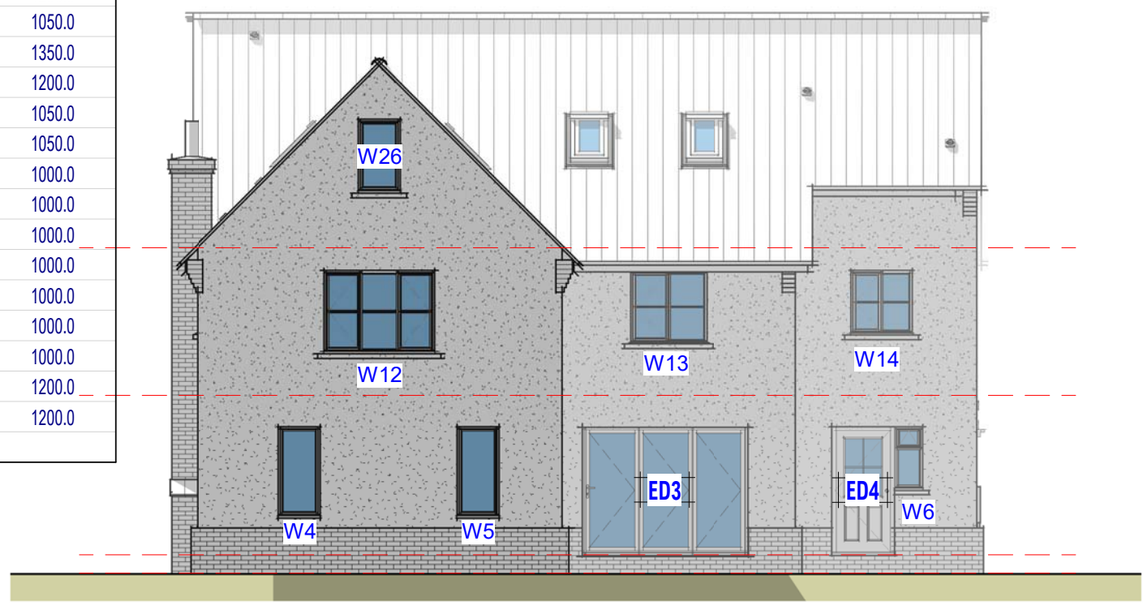

Elevation 03 - Rear

1 : 100

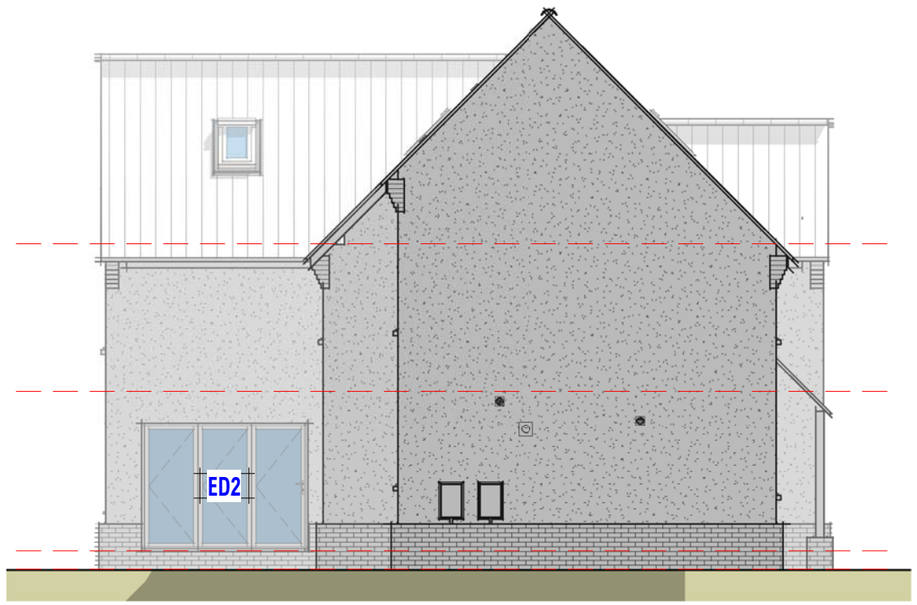

Elevation 04 - Left

1 : 100

Barrier Bank | Cowbit | Wilson Builders

Plot 1 Elevations

Drg No

2749 / BB1 / 03 rev D

remway Design Ltd