SCHEDULE OF EXTERNAL FINISHES 29-10-2020
PROPOSED 5 DWELLINGS AT 22 BACKGATE COWBIT.

EXTERNAL WALLS
WHERE BRICKWORK -


Hampton rural blend



WHERE RENDERED
Cream monocouche render system

ROOF FINISHES

Quinn Western Slate Graphite

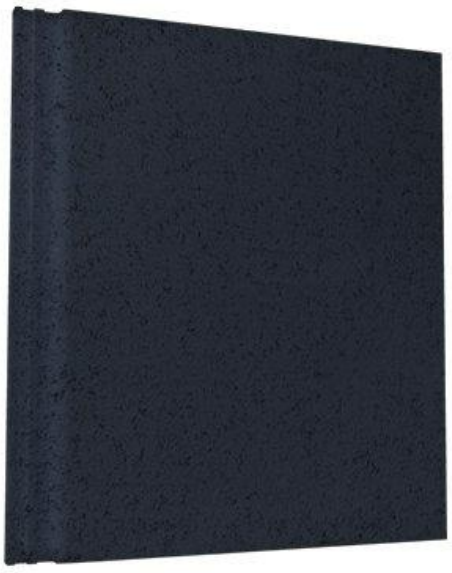

RAIN WATER GOODS

Black square profile

DOORS AND WINDOWS

Grey upvc wood grain affect

FASCIAS ETC

Grey upvc

GARAGE DOOR

Metal with painted finish

EXTERNAL PARKING BAY

Brown brindle interlocking paving

DISABLE ACCESS PATH AND REAR PATIOS

Buff paving slabs

DRIVEWAY AND OTHER PATH AREAS

Gravel