

Installation Instructions

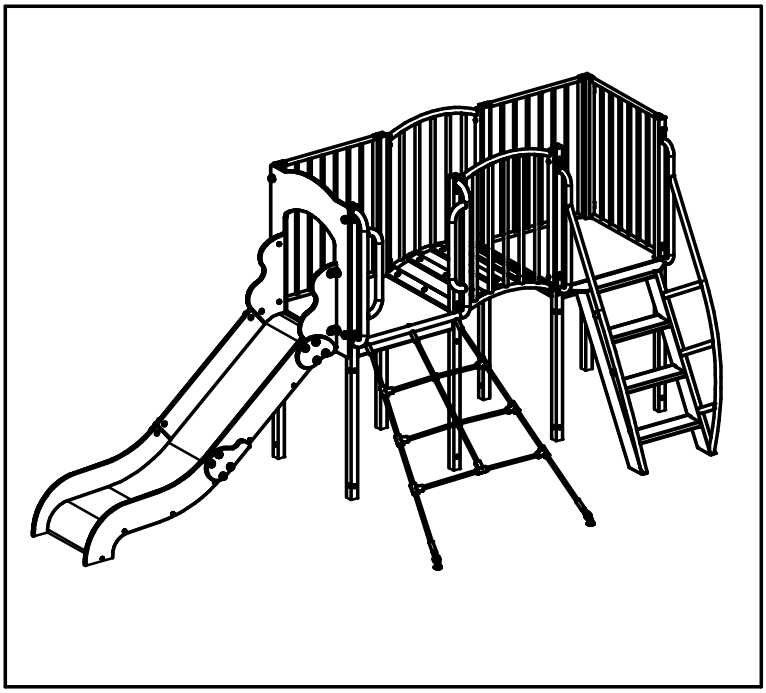

Planet Jungle	
The 'Cloud'	
PROD. CODE	901-CLOU
SIZE	4170x1960x1950
AGE RANGE	3 to 8 Years old
F/ FALL HEIGHT	990mm
HEAVIEST PART	See Attached
TOTAL WEIGHT	See Attached

Layout Details

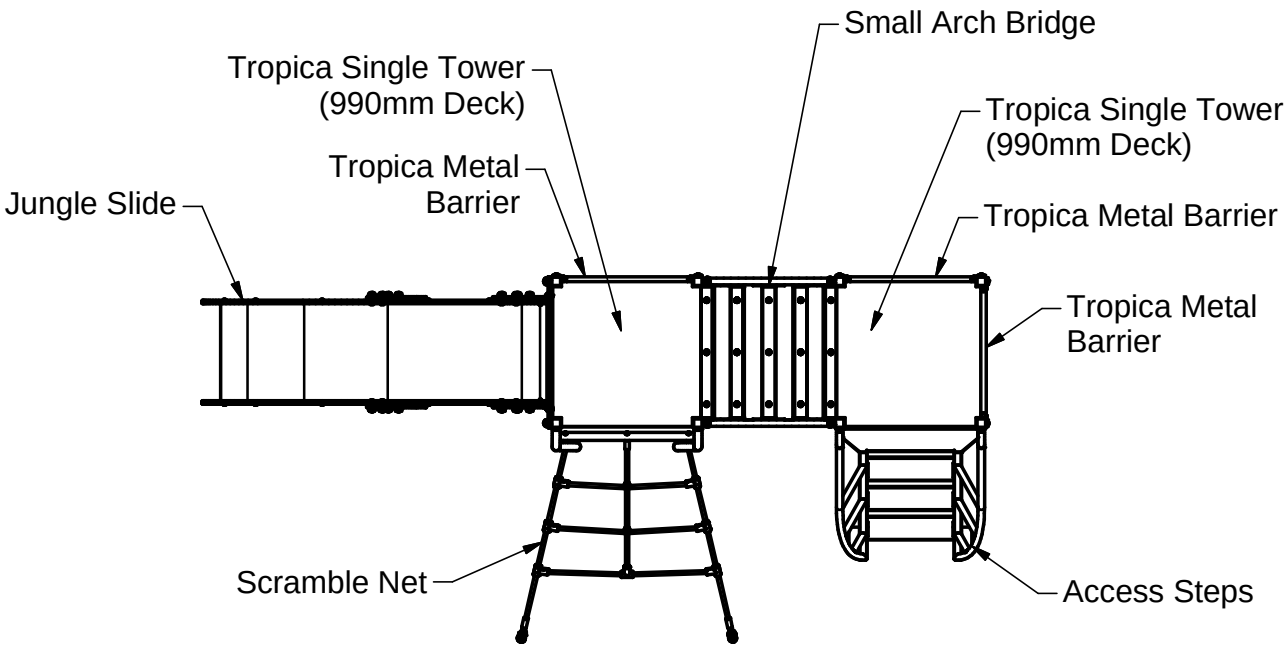


General Installation Instructions

1 Read instructions thoroughly before commencing installation of unit. For additional instruction on each unit see appropriate sheets attached.
2 Note:- In accordance with 6.1.3 EN1176-1:2017 we recommend that slides do not face south or near due south due to heat build up.
3 Excavate foundations as shown in the foundation plan.

Note:- 1. Ensure all installation aids are removed before first use.
2. Lifting Equipment or sufficient manpower should be used throughout installation.

Foundation Details


For loose fill see individual installation sheets

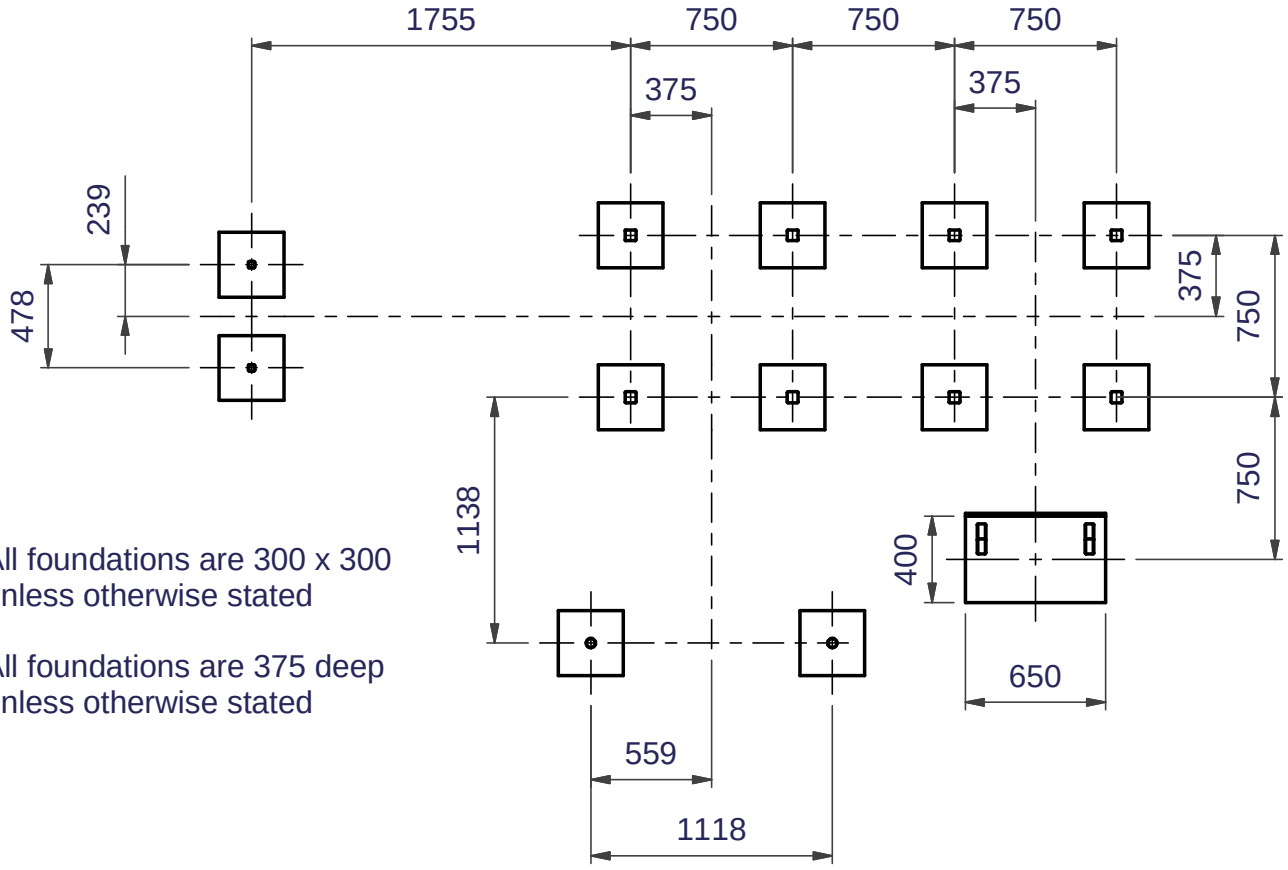

All foundations are 300 x 300 unless otherwise stated


All foundations are 375 deep unless otherwise stated

Minimum Space

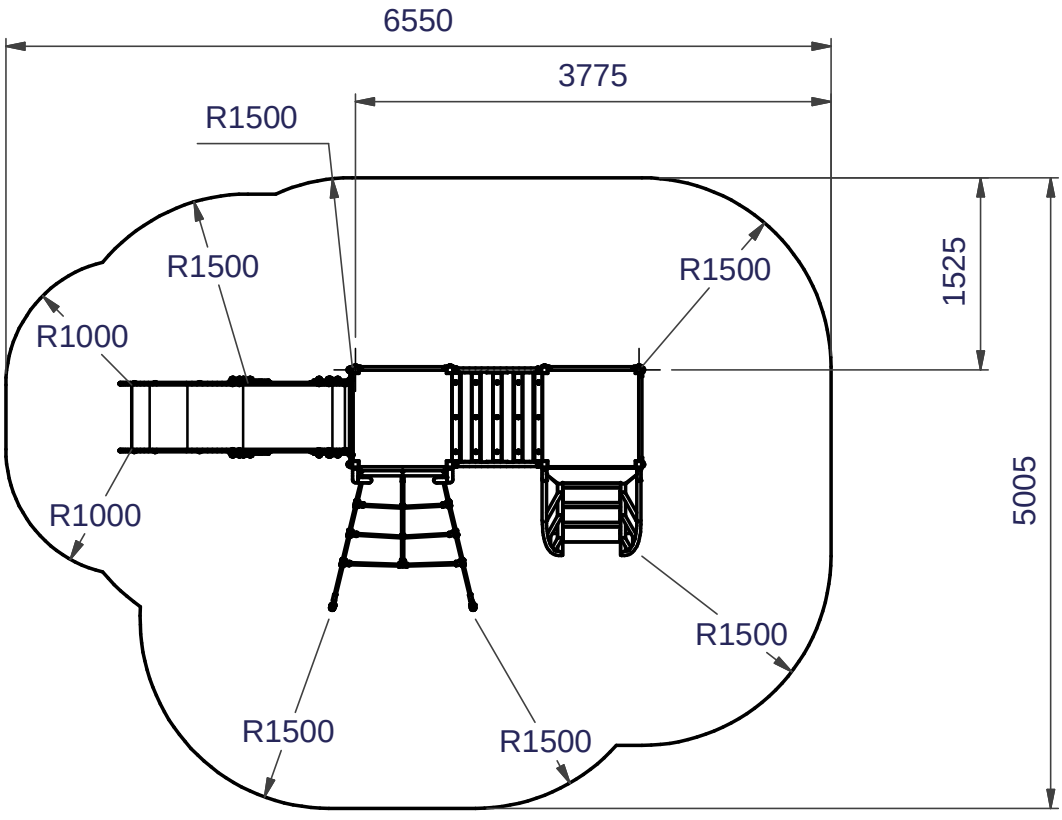


Wetpour Details

Max FFH = 990mm
25.5 sq Metres of Wetpour Area
19.0 Linear Metres of Wetpour Edging

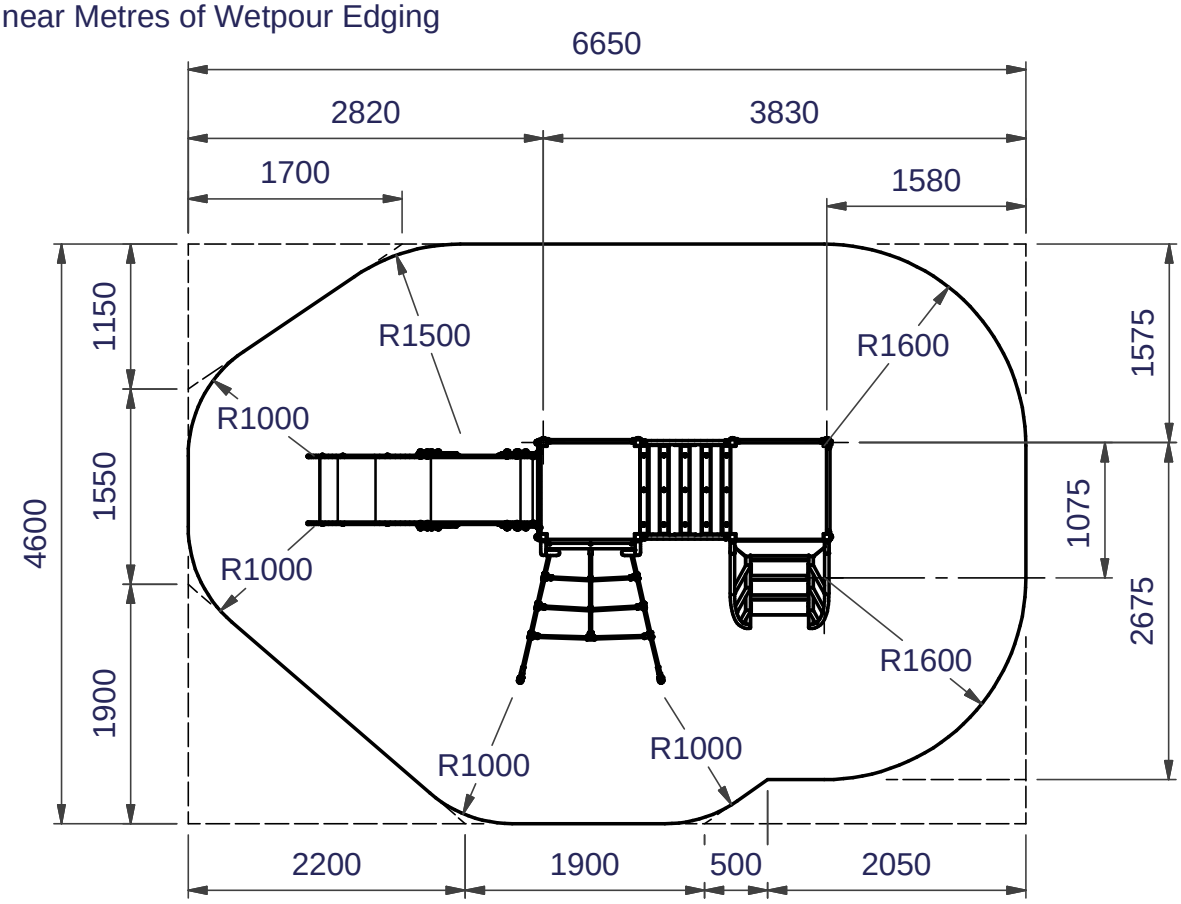


Grass Mat Details

22 Grass mats

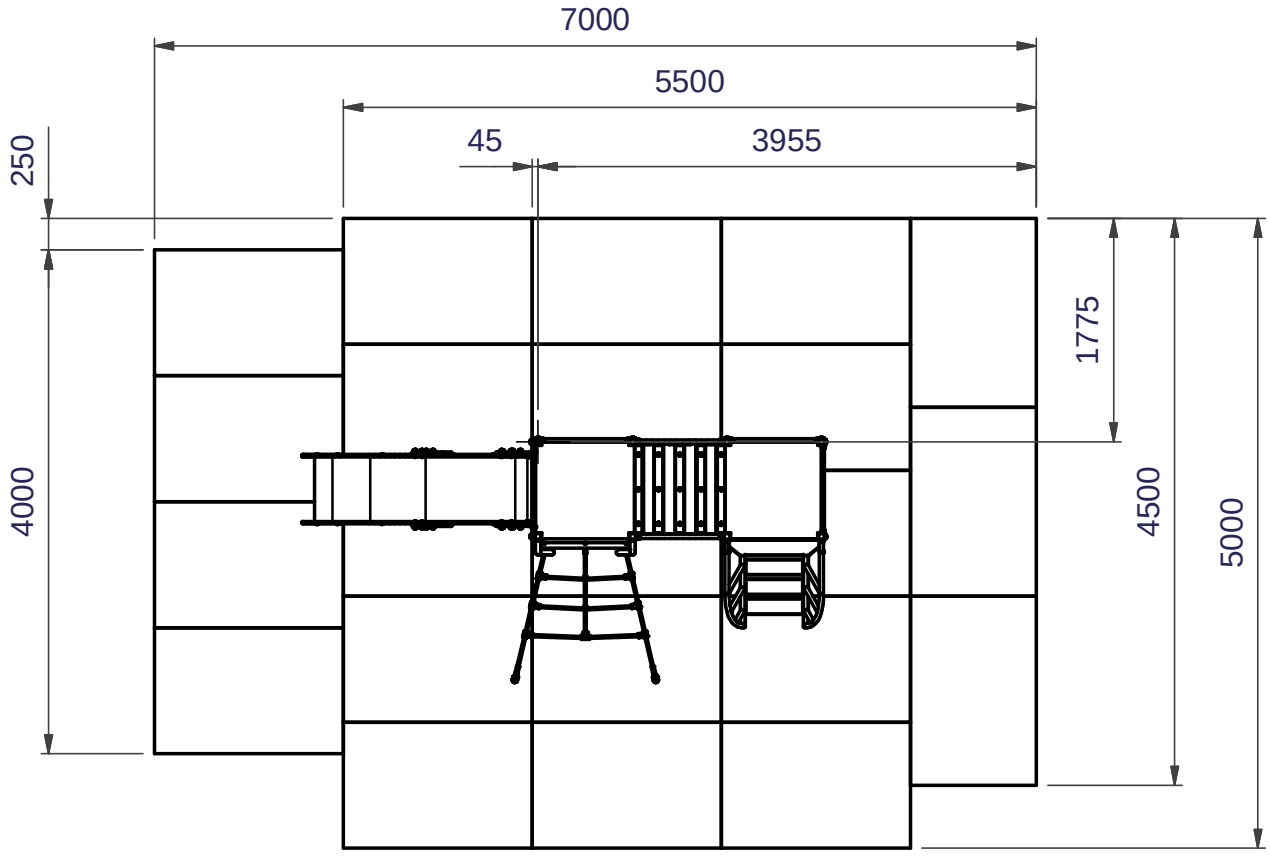


Bark Details


30.0 sq metres loose fill surfacing
20.5 linear metres loose fill edging

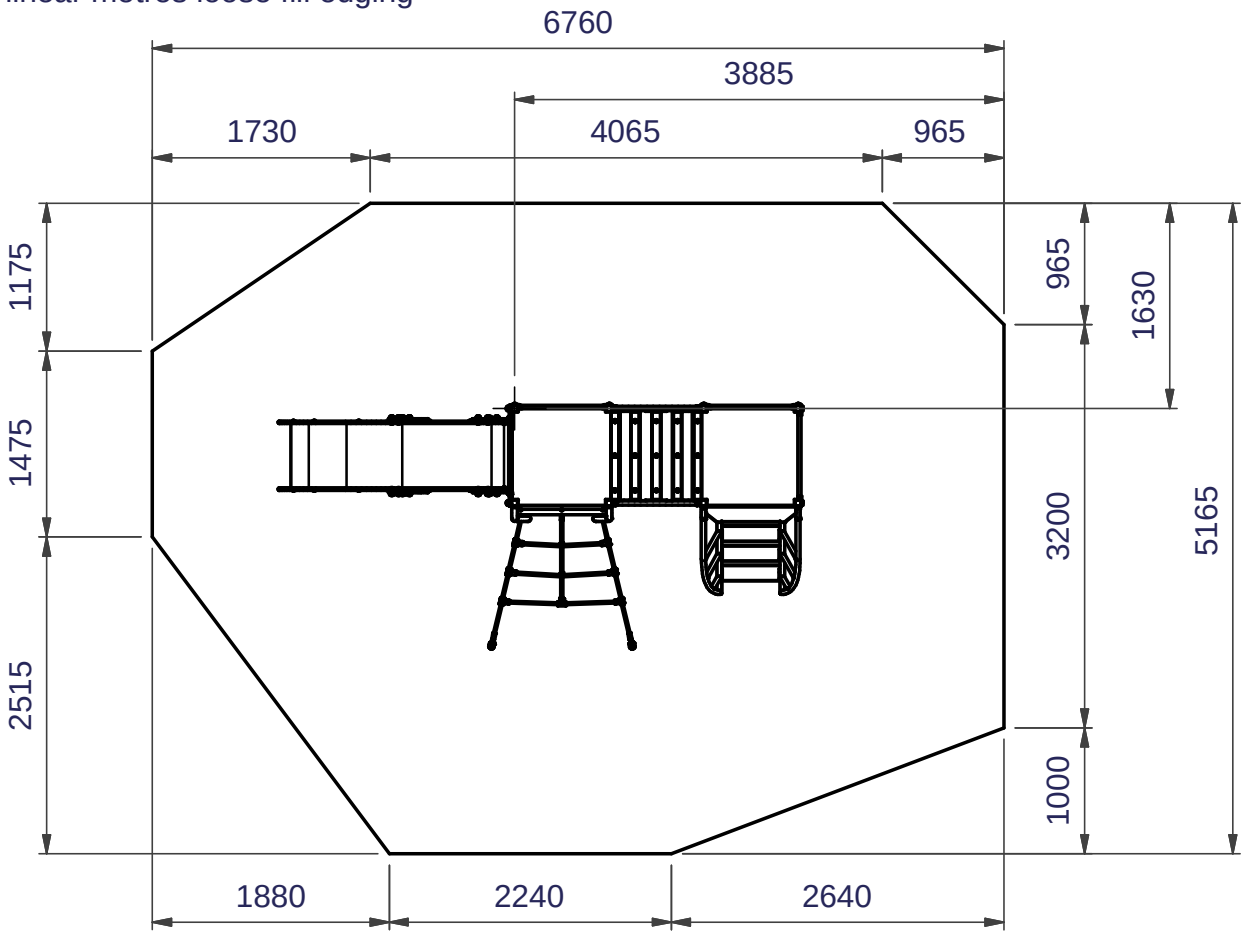


Installation Instructions

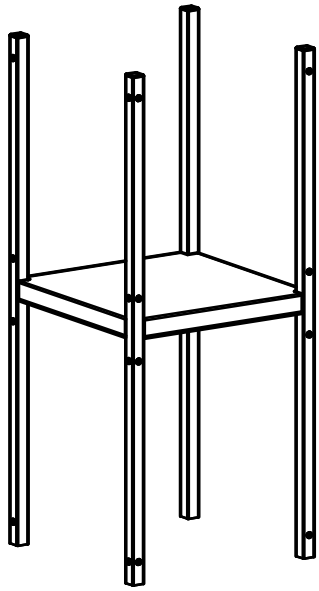

Tropica	
Single Tower	
PROD. CODE	90124
SIZE	800 x 2200 x 800
AGE RANGE	Up to 8 Years old
F/ FALL HEIGHT	990mm
HEAVIEST PART	Approx 70 Kg
TOTAL WEIGHT	Approx 70 Kg

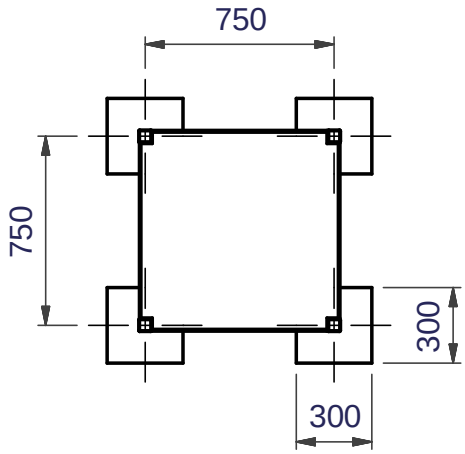

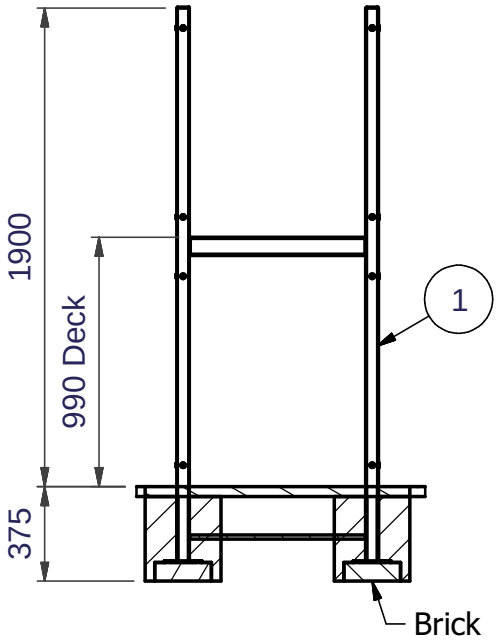


Installation Instructions

Care must be taken in abnormal conditions


1 Read instructions thoroughly before commencing installation of unit.
2 Excavate foundations as shown in the foundation plan.
3. Position the unit on bricks in excavated holes ensuring it is plumb, square, at the correct height, distance and orientation
4 Backfill the foundations with 0.12m³ concrete (4 parts gravel/2 parts sand/1 part cement).
5 Allow concrete to set for 48 hours before first use.

Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	90124-01	TROPICA SINGLE TOWER W.A. (990mm Deck)
FOR BARK FIX ADDED			
ITEM	QTY	PART NUMBER	DESCRIPTION
2	8	5071-028	Z-SHAPED BGF
3	8	2175-116	M10 x 30 LG HEX HD SCREW
4	8	2193-006	M10 Nut

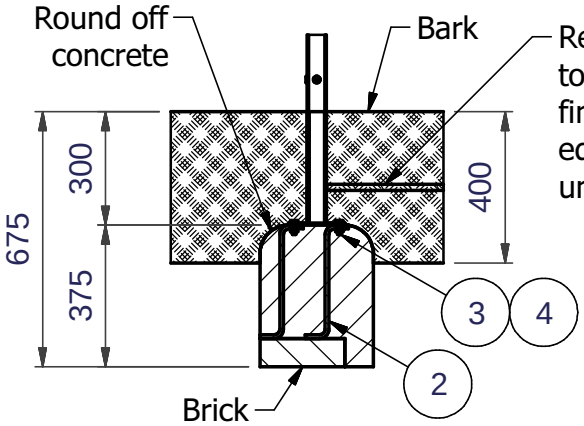



Note:- 1. Ensure all installation aids are removed before first use.
2. Lifting Equipment or sufficient manpower should be used throughout installation.

Installation Instructions

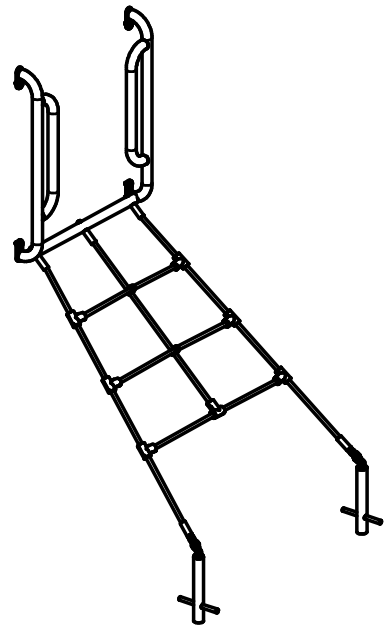

Tropica	
Scramble Net	
PROD. CODE	90104
SIZE	1155x1185x1896
AGE RANGE	Up to 8 Years old
F/ FALL HEIGHT	990mm
HEAVIEST PART	Approx 9 Kg
TOTAL WEIGHT	Approx 26 Kg

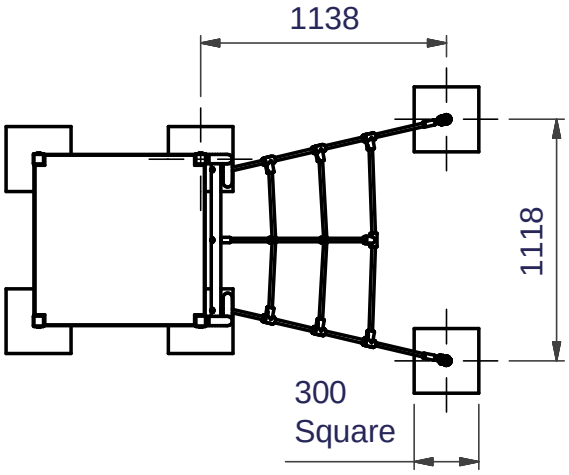


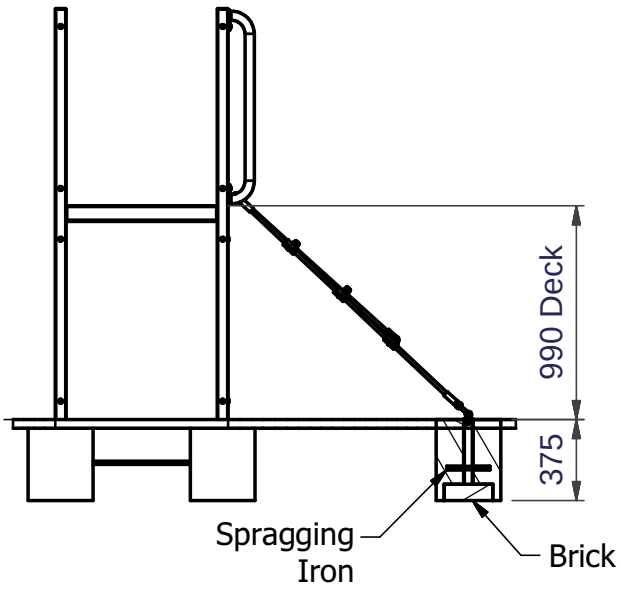

Installation Instructions


Care must be taken in abnormal conditions


1 Read instructions thoroughly before commencing installation of unit.
2 Excavate foundations as shown in the foundation plan.
3 Attach net to tower and below ground fixings as shown.
4 Fit spragging irons to the below ground fixings and position on bricks in excavated holes, ensuring the net remains taut.
5 Backfill the foundations with 0.06m³ concrete (4 parts gravel/2 parts sand/ 1 part cement).
6 Allow concrete to set for 48 hours before first use.

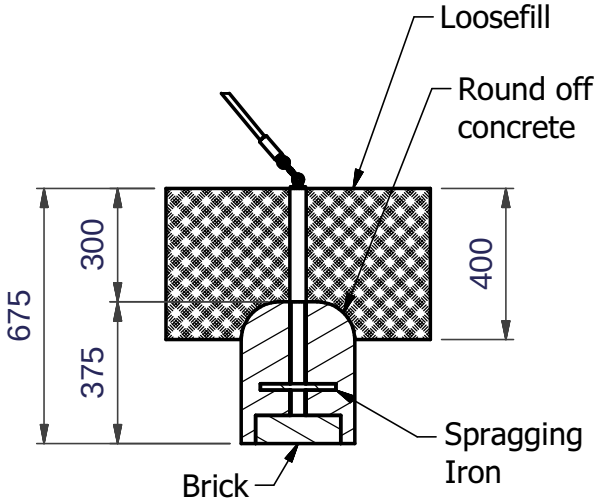

Note:- 1. Ensure all installation aids are removed before first use.
2. Lifting Equipment or sufficient manpower should be used throughout installation.


Low Scramble Net

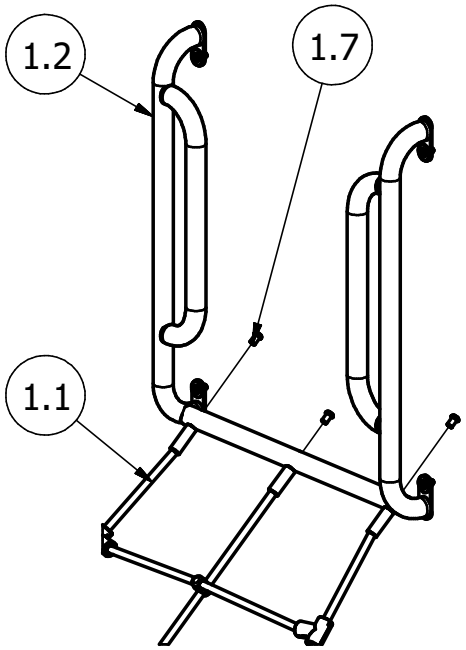

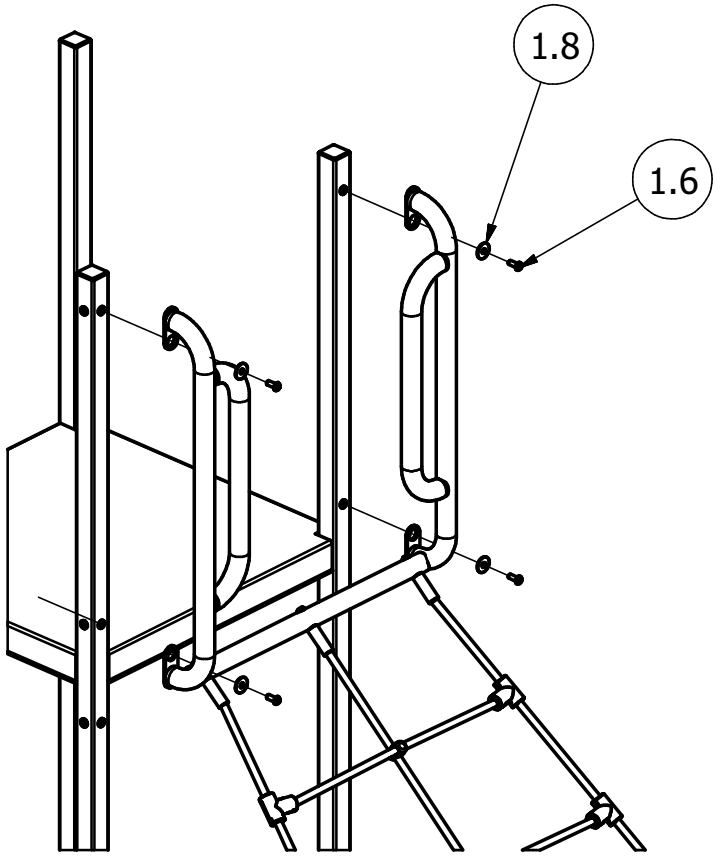


Net must be fitted in correct orientation - hand and footholds must rest on top of the longitudinal support ropes

Below Ground Fixing Fix

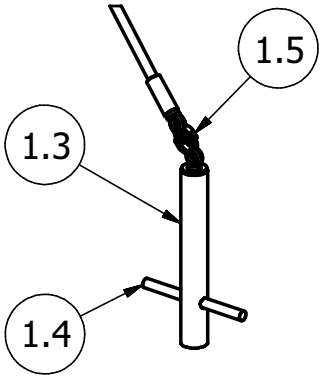

Bark Fix

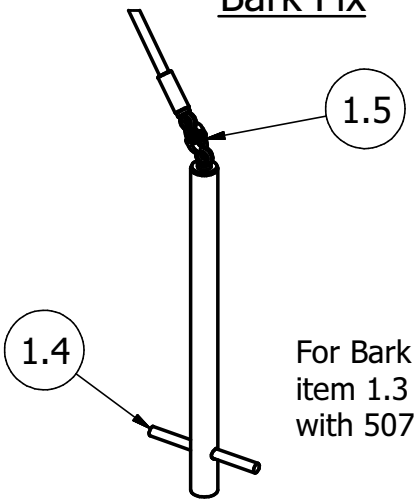


For Bark - Replace item 1.3 - 5071-024 with 5071-026


Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	90104	SCRAMBLE NET
1.1	1	90104-02	SCRAMBLE NET
1.2	1	90104-03	NET HAND HOLD ASSY
1.3	2	5071-024	BELOW GROUND FIXING ASSY
1.4	2	3031-010	SPRAGGING IRON
1.5	2	4061-237	Shackle Link Assembly
1.6	4	2176-126	M10 x 25 Pent Button Head
1.7	3	2177-002	M10 Safety Fastener
1.8	4	2215-519	Wicksteed Washer

Installation Instructions



Tropica	
Small Arch Bridge	
PROD. CODE	90113
SIZE	696 x 985 x 785
AGE RANGE	Up to 8 Years old
F/ FALL HEIGHT	
HEAVIEST PART	Approx 50 Kg
TOTAL WEIGHT	Approx 50.5 Kg

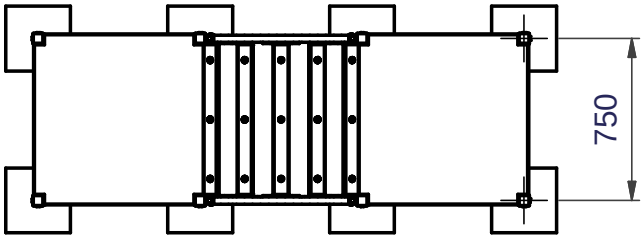


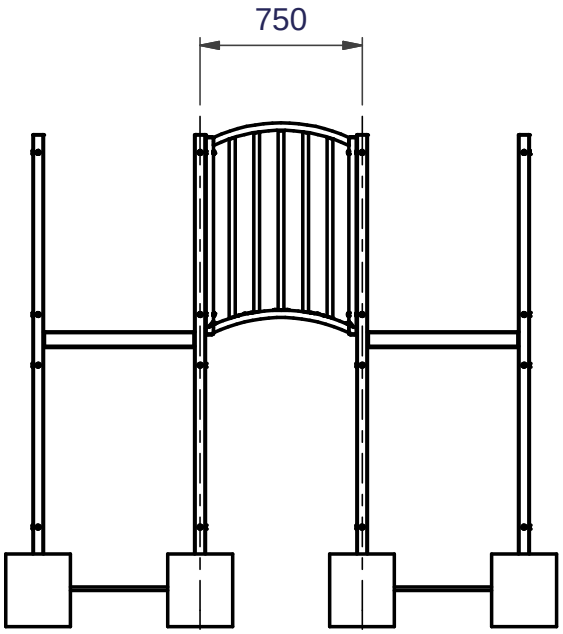

Installation Instructions

Care must be taken in abnormal conditions

1 Attach Bridge to tower using all fixings and tighten to secure

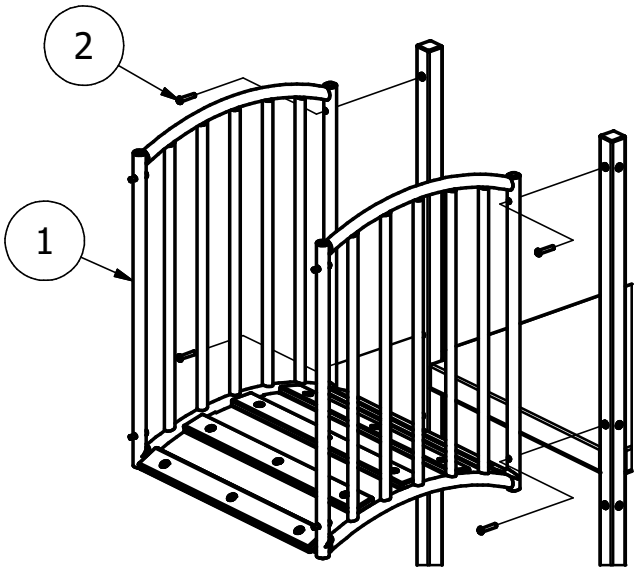


For fixing accessory to tower


Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	5907-002	SMALL ARCH BRIDGE ASSEMBLY
2	8	2176-129	M10 x 50 Pent Button Head


Note:- 1. Ensure all installation aids are removed before first use.
2. Lifting Equipment or sufficient manpower should be used throughout installation.

Installation Instructions

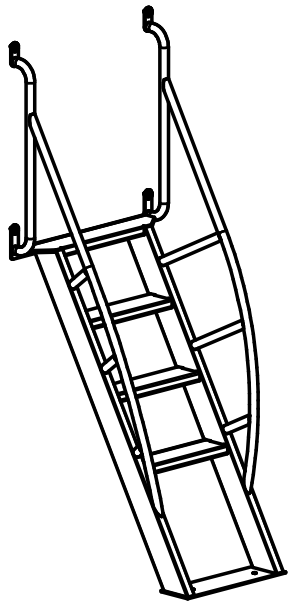

Planet Jungle	
Access Steps	
PROD. CODE	90167
SIZE	0.48 x 0.8 x 2.3
AGE RANGE	4 Years to Adult
F/ FALL HEIGHT	990mm
HEAVIEST PART	Approx 48.8 Kg
TOTAL WEIGHT	Approx 50 Kg

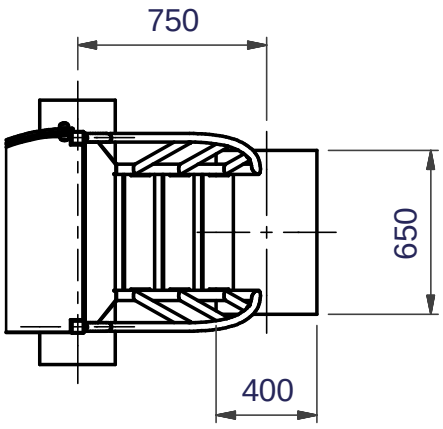

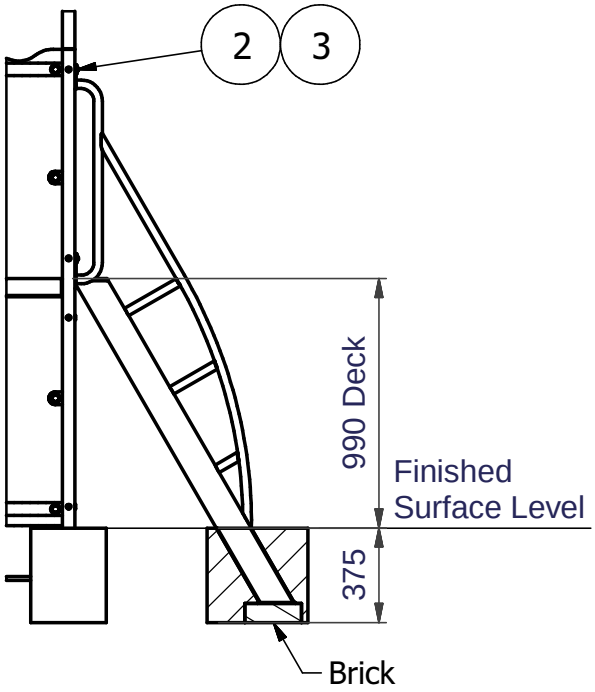


Installation Instructions

Care must be taken in abnormal conditions


1 Read instruction thoroughly before commencing installation of unit
2 Excavate foundations as shown in the plan
3 Position steps on bricks in the excavated foundations and secure to tower as shown
4 When the unit is fully assembled and all fixings secure, backfill the foundations with 0.09m³ of concrete (4 parts gravel/2 parts sand/1 part cement)
5 Allow concrete to set for 48 hours before first use

PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	90167-01	ACCESS STEPS WELDED ASSY
2	4	2176-126	M10 x 25 Pent Button Head
3	4	2215-519	Wicksteed Washer
FOR BARK FIX ADD			
ITEM	QTY	PART NUMBER	DESCRIPTION
4	2	5071-028	Z-SHAPED BGF
5	2	2175-116	M10 x 30 LG HEX HD SCREW
6	2	2193-006	M10 Nut

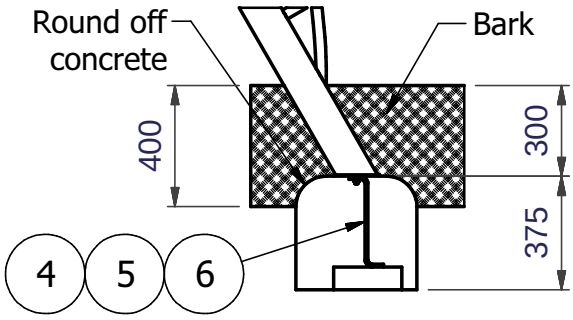


Note:- 1. Ensure all installation aids are removed before first use.
2. Lifting Equipment or sufficient manpower should be used throughout installation.

Installation Instructions

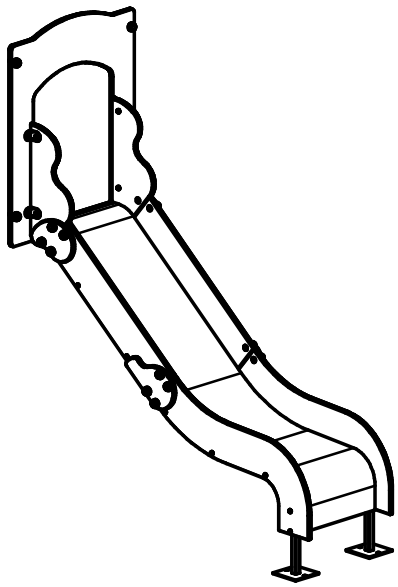

Planet Jungle	
Jungle Slide	
PROD. CODE	90171
SIZE	1850x1800x800
AGE RANGE	3 to 8 Years old
F/ FALL HEIGHT	990mm
HEAVIEST PART	Approx 53 Kg
TOTAL WEIGHT	Approx 57 Kg

Note:-
In accordance with 6.1.3 EN1176-1:2008 we recommend that slides do not face south or near due south due to heat build up.

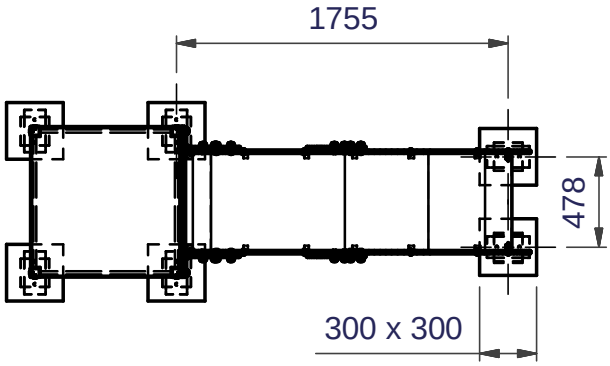



Installation Instructions

Care must be taken in abnormal conditions


1. Read instructions thoroughly before commencing installation of unit.
2. Excavate foundation holes as shown on the foundation plan.
3. Attach legs to chute and position in place.
4. Attach slide loosely to tower.
5. Check slide is at the correct height & position.
6. Tighten all fixings and concrete foundations 0.06 cubic m concrete (4 parts gravel, 2 parts sand, 1 part cement).
7. Allow concrete to set for a period of 48 hours.
8. Re-tighten all fixings.

FOR BARK FIX ADD			
ITEM	QTY	PART No	DESCRIPTION
17	4	5071-028	Z-SHAPED BGF
18	4	2175-116	M10 x 30 LG HEX HD SCREW
19	4	2193-006	M10 Nut

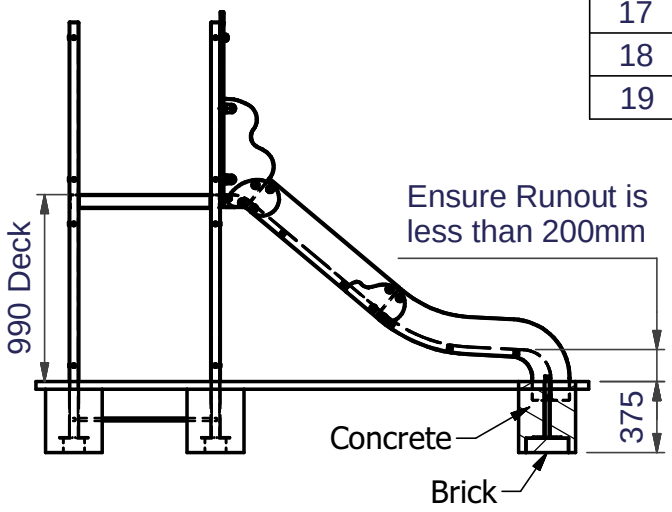


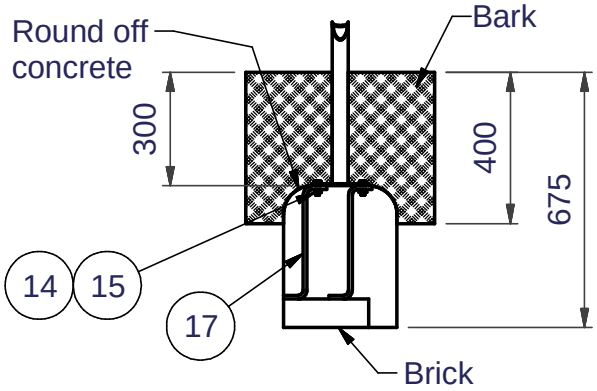

Note:- 1. Ensure all installation aids are removed before first use.
2. Lifting Equipment or sufficient manpower should be used throughout installation.

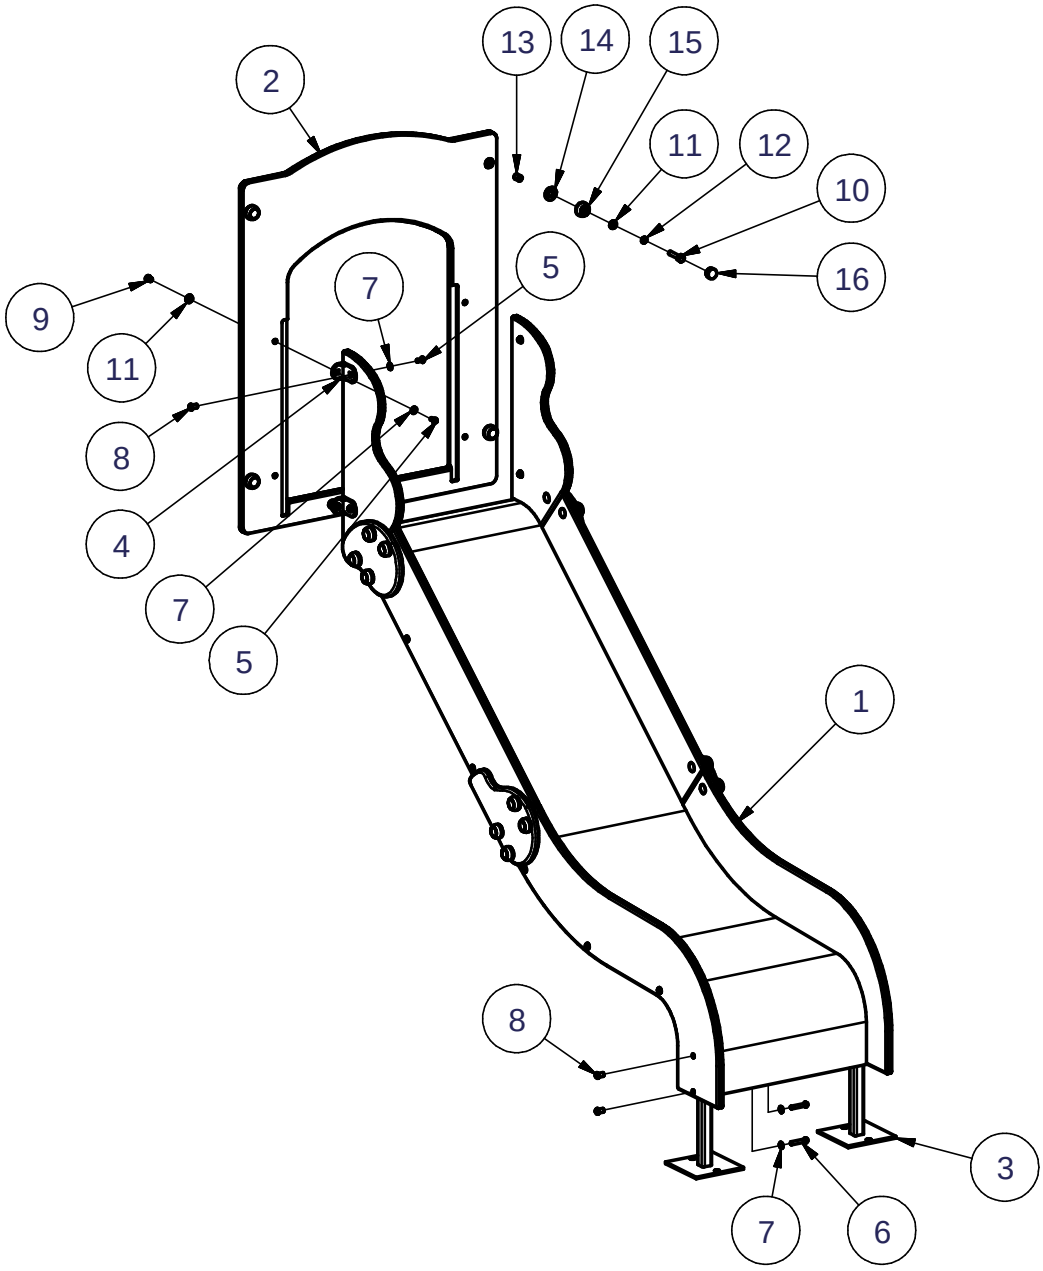

Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	5031-428	Jungle Slide Sub Assembly (990mm Deck)
2	1	3756-239	Jungle Slide Start Panel
3	2	4201-211	SLIDE GROUND FIXING
4	4	2900-057	FIXING BRACKET (RED)
5	8	2176-151	M8 x 16 Pent Button Head
6	4	2176-155	M8 x 45 Pent Button Head
7	12	2215-507	M8 Washer
8	8	2177-001	M8 Safety Fastener
9	4	2177-004	M8 Short Safety Fastener
10	4	2175-120	M10 x 50 LG HEX HD SCREW
11	8	2215-508	M10 Washer
12	4	2212-203	M10 Spring Washer
13	4	2472-003	FIXING SPACER
14	4	2900-041	NEOPRENE WASHER
15	4	2611-029_Cup	Yellow Poeppelmann Cup
16	4	2611-029_Cap	Yellow Poeppelmann Cap

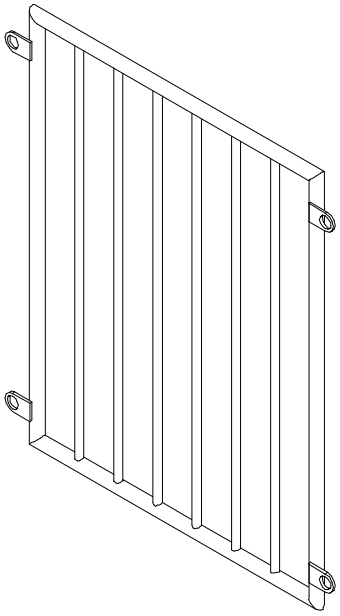

TROPICA

METAL BARRIER

PROD CODE:	90122
SIZE:	788 x 28 x 910 mm
AGE RANGE:	UP TO 8 YEARS
WEIGHT OF HEAVIEST PART	15 Kg
OVERALL WEIGHT OF UNIT	15 Kg


DELIVERY LIST		
Part No.	Description	Qty
90122-01	Metal Barrier Assembly	1
-	Fixings Pack	1

SPECIFICATION

Barrier:	Made from 20 mm Nominal Bore Tube, medium gauge to BS 1387, infills are 16Ø mm mild steel bar.
Fasteners:	Non standard anti-vandal, plated for weather protection.
Finish:	Low Lead Polyester powder paint to BS EN71 Pt. 3.
Welds:	Copper free wire diameter 1 mm conforming to 2091 AIB for Mild Steel.

INSTALLATION INSTRUCTIONS

1 Read installation instructions through before commencing erection of unit.
2 Do NOT tighten fastenings until the unit is completely assembled

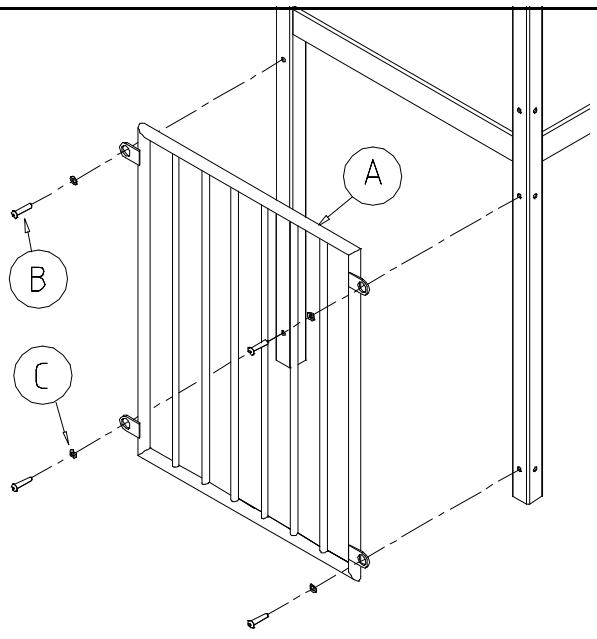

Fixing detail to tower:

1. Attach (A) Metal barrier to tower using (B) M10 x 25 lg Pent button head screws and (C) M10 Wicksteed washers.

Wicksteed LEISURE

Note:-Ensure all installation aids are removed before first use.

Note: M8 bolts to be torqued to 18 Nm (13lbft.).
M10 bolts to be torqued to 34 Nm (25lbft)
M12 bolts to be torqued to 55 Nm (40lbft).
All protruding screw threads to be peened over to remove sharp edges.

REF	QTY	DESCRIPTION	PART No
A	1	Metal Barrier assembly	90122-01
B	4	M10 x 25 lg Pent button head screws	2176-126
C	4	Wicksteed Washer	2215-519

Note:-All spare parts are available from Wicksteed Leisure on request.

For maintenance instructions see separate sheet.

Wicksteed LEISURE	COMPILED:	APPROVED :	REV	NEW				
	MH		ECN	1396				
	DATE:	DATE:	SIG.	MH				
	2/11/01		DATE.	2/11/01				