


SECTION THRO CHIMNEY AT GABLE END




SECTION THRO ROOF

DUMMY CHIMNEY

PITCHED ROOF CONSTRUCTION - OVER GARAGE.
Interlocking concrete roof tiles to B.S. EN 490 / 491, on 25 x 38 softwood treated battens on "Dupont" Tyvek Supro membrane in accordance with BBA cert. 04/ 4104 (second issue) in all cases to be lapped by minimum 150mm both vertically and horizontally. Tiles to be laid with min. head lap of 75mm and to be fixed in accordance with regard to wind speed, roof pitch and exposure category as detailed in B. S 6399, Pt 2. Insitu oak roof to a pitch of 30 deg. 25 x 225 Ridge board. 47 x 150 Jack Rafters at 400mm c.c. 47 x 100 ceiling joists at 400mm c.c. 38 x 100 ceiling binders. All rafters to be strapped to w.if plate by 30 x 5 galvanised metal straps acting as anchor and lateral restraint straps at max. 1.5m c/ c. Note:- provide solid bridging beneath straps: 50 x 100 w.i plate bedded on sand and cement: 25 x 175 fascia boards: 6mm ext. grade plywood soffit: All structural timber to be min SC3 grade. stamped "DRY" or "KD" to indicate moisture content of 20% or less all in accordance with BS. 4978: Timber supports are to be provided beneath water storage tanks over 4No ceiling joists. At roof intersections provide 25 x 100 lay boards and diminishing trusses at 600 c/ c : Incl. lead code 4 lead valley liner.

DORMER CONSTRUCTION
Form 90 deg. pitch dormer as shown on plan: roof covering as main roof on 47 x 100 rafters and ceiling joists at 400 c/ c on 50 x 100 hse'd plate: 12.7mm plasterboard and skim to ceiling with 10 Omm glass fibre insulation laid between joists and 150m m laid over joists: Form external walls and cheeks of 19 x 125 treated timber on 25 x 38 treated timber studs at 400 c/ c on breather paper fixed to 7mm ext. grade sheathing ply on 50 x 100 timber sta's at 400 c/ c. 100mm "Isolite 50" insulation in 'I' between studs: finish internally with 12.7mm Gyproc "duplex" plasterboard and skim: Form code 4 lead flashing to dormer cheeks.

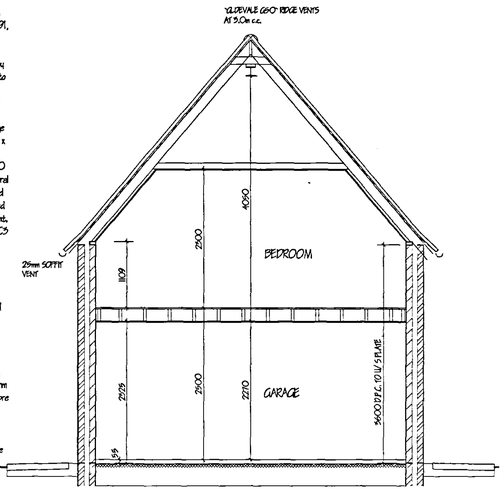

TYPICAL GARAGE SECTION




FRONT ELEVATION




SIDE ELEVATION

EXTERNAL MATERIALS.
WALLS - IBSTOCK PARKHOUSE RED
ROOFS - SANDTOFT CALDERDALE SLATE - GREY.
STONE LINTELS & CILLS.

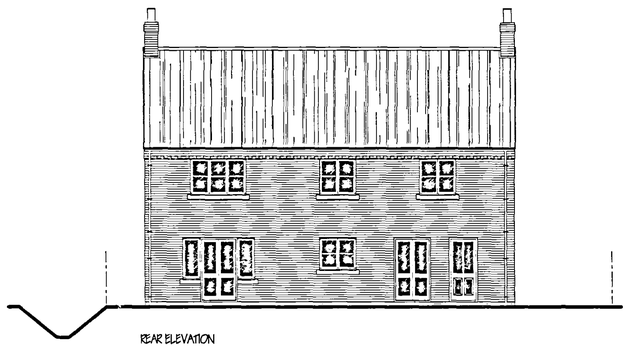

REAR ELEVATION

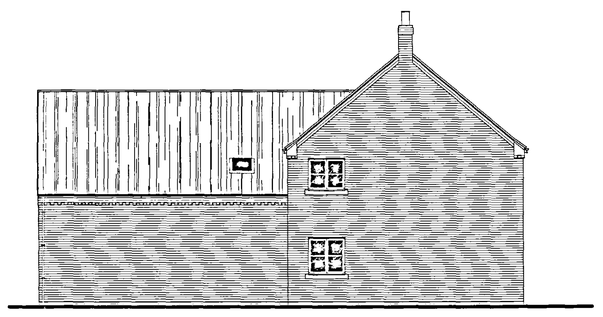

SIDE ELEVATION

C.	REMOVE STRING COURSE & AMEND STACK - PLANNING.	NOV '06.
B	REDUCE SIZE FOLLOWING PLANNING REFUSAL	SEPT '06
A	REDUCE SIZE - FOLLOWING PLANNING REFUSAL.	JUNE '06.
ref:	revision	date

G. R. MERCHANT GRM
I.ENG AMICE FIWO
ARCHITECTURAL, STRUCTURAL AND LAND DRAINAGE CONSULTANTS
Unit 4, Wrights Mews
12A Park Road, Holbeach,
Spalding, Lincs. PE12 7EE
Tel: 01406 490800
Fax: 01406 425744
E-Mail: G. R. Merchant @ Merchant. Fs. Co. UK

Received
Planning Department
06 NOV 2006
Ref: 1366/06

APPROVED PLAN
Ref: A1

SUPERSEDED

Project
PROPOSED HOUSE & GARAGES.
NORTH ROAD.
GEDNEY HILL.
SPALDING. LINC'S..

Client
MR. & MRS. C. CANNON.

Drawing
ELEVATIONS & SECTIONS.

Job Ref.	Drawing No.
1316-06.	02C.
Date	Drawn
MARCH '06.	GRM.

Scales
1/50. 1/100.

DO NOT SCALE FROM THIS DRAWING
This drawing is copyright and may not be altered, issued, photographed or used for any other purpose other than that for which it is issued. The General Contractor is to check all dimensions on site and report any discrepancies to the Architect. All details shown on this drawing, including foundations are based upon typical site conditions related to the area. No responsibility can be accepted for abnormal conditions which may be discovered during commencious unless reported to the Architect so that design amendments may be considered. Site and surveys are recommended in respect of foundations, to establish specific site conditions. Where foundation work is undertaken, This drawing is limited in the amount of information contained and does not purport to contain a full specification of the works. It is issued for the purpose of obtaining Planning / Building Regulation Approval. This drawing shall not be used for construction purposes unless signed by the Building Inspector and shall be the responsibility of the Members or any representative thereof, it is the client or their appointed agents responsibility to control environmental pollution of materials, adherence to specifications, variations to approved details, materials to be new unless otherwise stated and all components and materials etc. to be used fitted and installed etc. in strict accordance with manufacturers instruction and relevant code of practice. Materials shall conform to appropriate British standard specification or BBA certificate or European code equivalent. The Employer / Client shall ensure that the selected contractor is conversant with and adopts all measures necessary to achieve compliance with Health and Safety legislation for Building sites and Work places. The Employer / Client is advised they should the works need to comply with the Construction Design and Management Regulations an Inspectorate Planning Supervisor will be required to be appointed by the Employer / Client prior to the commencement of Work that will not specifically be shown but may be reasonably inferred as necessary to carry out the works shall be deemed to be included. It is the plot / land owners responsibility to be aware of the Party Wall etc. Act 1996, when building in close proximity to adjoining neighbors boundaries.