


FRONT ELEVATION

REAR ELEVATION

SIDE ELEVATION

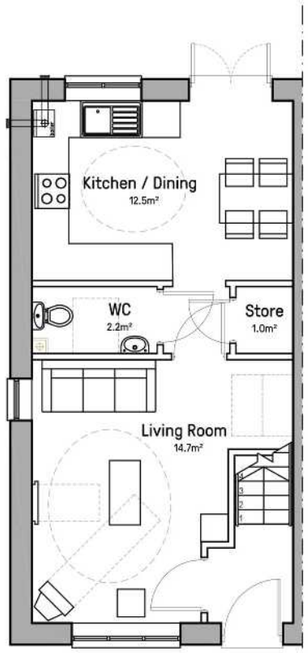

GROUND FLOOR
FLOOR AREA: 36.27m²
TOTAL FLOOR AREA: 72.54m²



FIRST FLOOR
FLOOR AREA: 36.27m²

Contrasting brick option on plots 05, 13, 14, 22, 23, 24, 25, 31, 32, 38, 43, 44, 49 and 50.

Obscured glazing

Gable windows omitted on plots 02, 05, 30, 31, 38, 41, 46 and 47.



FRONT ELEVATION
Contrasting Brick option

Materials Schedule

1. Walls: PD Edenhall 'Peakdale Range' Leamington Wine
2. Walls: PD Edenhall 'Peakdale Range' Scarborough Sunrise
3. Roof and Canopy: Russel 'Dark Grey' Roof Tiles
4. Windows: White uPVC
5. Fascia Board: White uPVC
6. Rainwater Goods: Black uPVC
7. Door: Birtley 'Whitburn' or similar grained effect 'Black'
8. Buff Stone Lintels and Cills

PLANNING

Notes
- Copyright in this drawing remains the property of BM3 Architecture Limited.
- Do not scale this drawing. Work to figured dimensions only.
- Contractors and consultants are to advise BM3 Architecture Limited of any discrepancies.

Revision	Date	By	Chkd
B - UPDATED BASED ON BRICK OPTIONS. MATERIAL SCHEDULE ADDED. METER BOXES POSITIONS UPDATED	11.06.19	JB	JJ
C - METER BOXES UPDATED	13.06.19	JB	JJ
D - GABLE WINDOWS NOTE AMENDED.	01.08.19	JB	JJ

Project	Drawing	Client
CREASE DROVE CROWLAND PETERBOROUGH	HOUSE TYPE F133 2 BED / 4 PERSON	Partner

Scale	Dated	Job No.	Drawing No.	Drawn by	Checked	CiSfb Element	Revision
1:100@A3	14.12.2018	70688	D12	JB	JJ	PLANNING	D

Birmingham Office 28 Pickford Street, Digbeth, Birmingham, B5 5QH T. 0121 633 0000 F. 0121 633 0300 E. design@bm3.co.uk