


Wardale® Cycle Shelter

BXMW/WAR



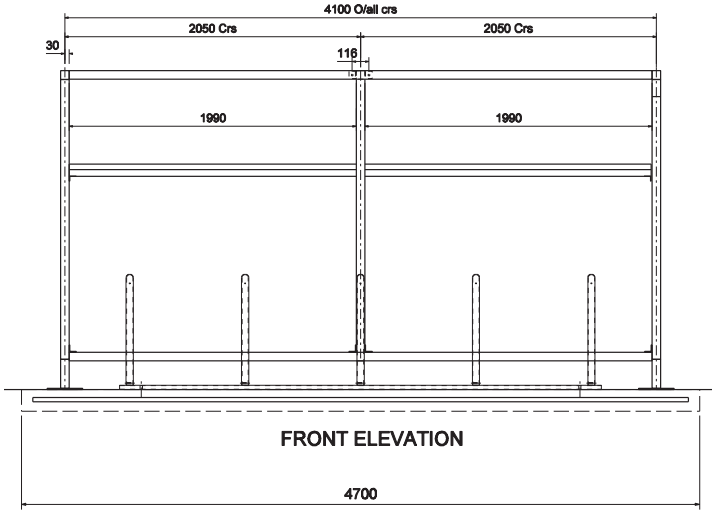



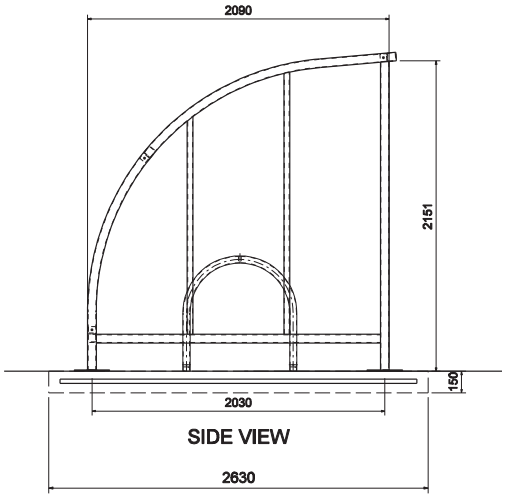

Standard Unit Dimensions
Width: 2140mm
Height: 2150mm

Length with Capacities

2000mm	4 cycles
3000mm	8 cycles
4100mm	10 cycles
5000mm	12 cycles
6000mm	14 cycles

Features
Robust modular construction
Load bearing purlins
Welded end frames
Made from heavy-duty mild steel box section
Assembled with anti-tamper high strength bolts
Anti-climb end frames
Adjustable baseplates
Hot dip galvanized to BS EN ISO 1461:2009
Weather resistant cladding

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire ST5 6BD
Tel: 01782 571660 • Email: shelters@broxap.com • Web: www.broxap.com

Specification Sheet

Wardale® Cycle Shelter
BXMW/WAR

Materials Used
Framework - Mild Steel
Cladding - 4 mm PETG uv
Fasteners - Zinc Plated
Cover Strips - Pre-galvanized steel flat

Finish Options
Hot-Dip Galvanized to BS EN ISO 1461:2009
Hot-Dip Galvanized & Polyester Powder Coated 60mm-120mm dft
Hot-Dip Galvanized with Duplex (Zinc Coated) Powder Coating (coastal) 180-240 overall dft

Weather Resistance
Cladding is UV Stabilised
Wind resistant to 23m/s


Fire Resistance
Cladding is fire tested to '1Y' for BS 476

Design-Life, Guarantees & Warranties (terms apply)
25 year structural guarantee
34 year (min) life expectancy for Hot Dip Galvanizing
8-10 year life expectancy on standard powder coatings
10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
10 years manufacturers guarantee on cladding material
10 year warranty on product materials
12 year warranty on parts & labour


Please Note: All information on this data sheet is subject to orientation (N,S,E,W) altitude and proximity to buildings, but is sufficient for use as general/preliminary information)

Installation

Surface fixing on concrete

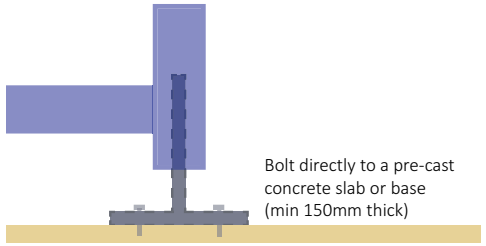

Submerged Fixing

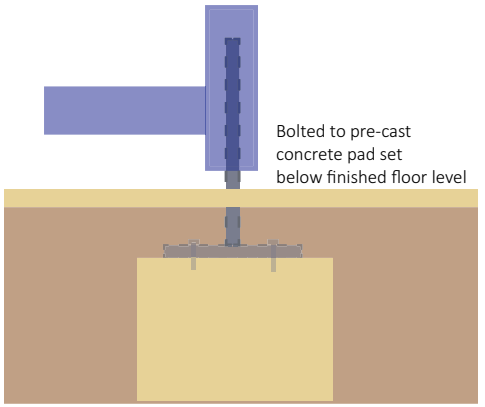

Options
Steel Profile, Trapezoidal roof/rear cladding
Opal Cladding to Roof and Sides
Extended adjustable baseplates for submerged fixing
Swinging Security Gates
Sliding Security Gates
Digital Mechanical or Keyed Locks
Further anti crawl bars can be fitted dependent on surface level
Helmet Lockers
Powder Coating to a wide range of colours
LED or solar lighting
Full Installation Service
Varied Range of Cycle Racks
Varied Range of Cycle Stands

Colours/Finishes



THE COLOURS SHOWN ARE A GUIDE ONLY. PLEASE CHECK A COLOUR CHART TO SEE THE ACTUAL COLOUR.

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire ST5 6BD
Tel: 01782 571660 • Email: shelters@broxap.com • Web: www.broxap.com