FENCING & PLANTING SCHEME

A MIXED HEDGE


(a) Hawthorn (Crataegus Monogyna)
(b) Beech (Fagus Sylvatica)
(c) Blackthorn (Prunus Spinosa)
(d) Buckthorn (Rhamnos Cathartica)

B LINCOLNSHIRE POST & RAIL FENCING

All planting to be in accordance with Bs 4428:1989 and amended No.1 (1991).


All trees to be planted with minimum 0.6m plastic mulch mat to be staked, tied and tubed.

1/3 to ½ bag per peat free tree and shrub planting compost to be incorporated into backfill for each tree hole.

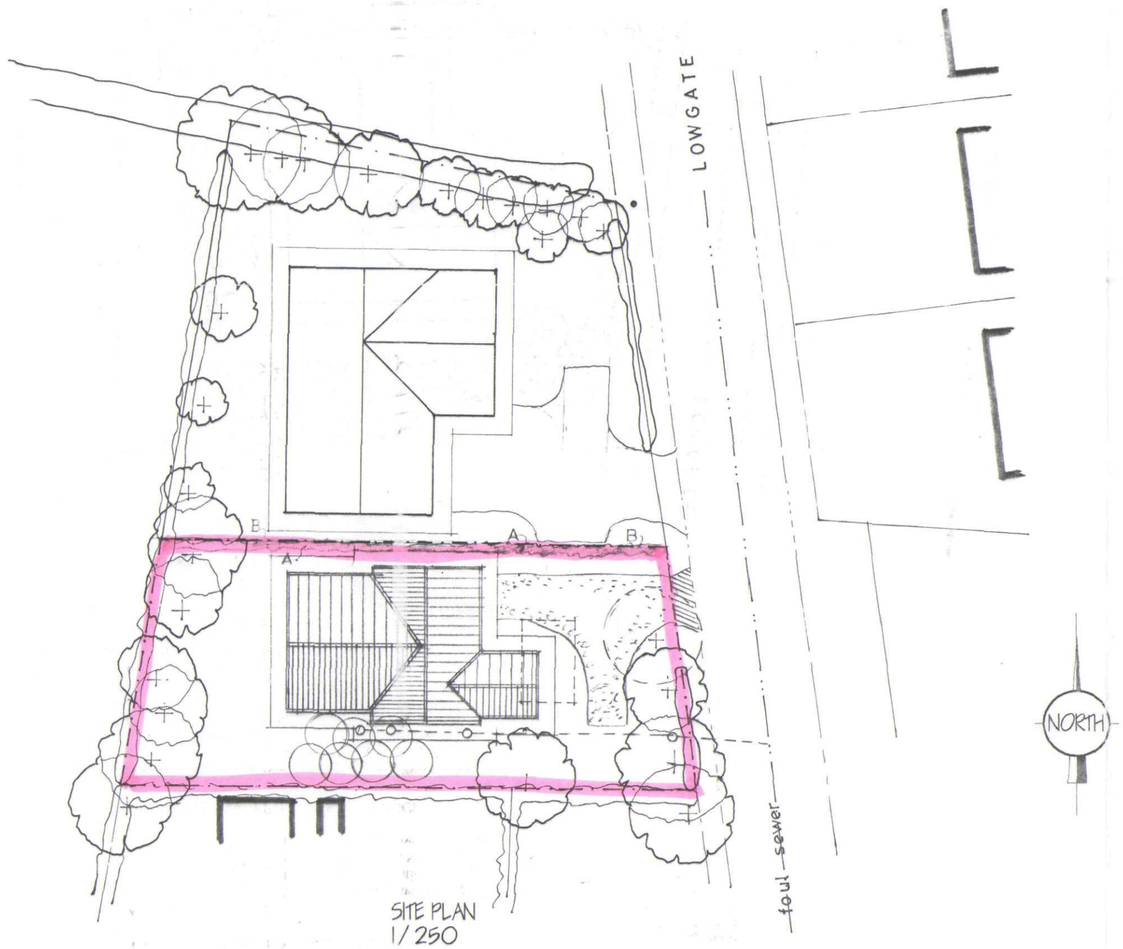

SITE PLAN
1/250

Trees to be removed

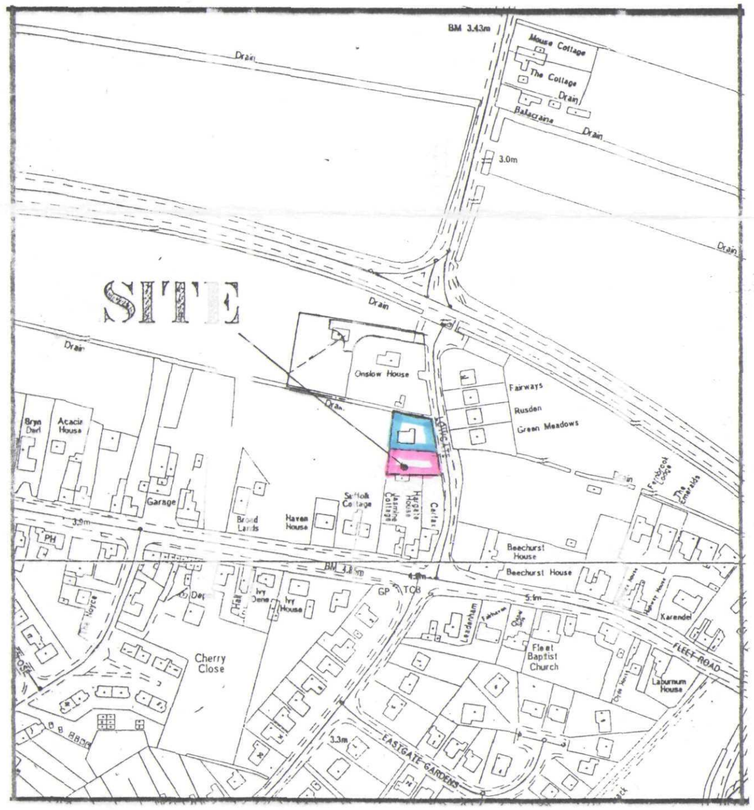

LOCATION PLAN
1/2500

Lincs
Planning & Development
17 OCT 2003
Plan 1074/03

G. R. MERCHANT
I.ENG AMICE FIWO

ARCHITECTURAL, STRUCTURAL AND LAND DRAINAGE CONSULTANTS

Unit 4, Wrights Mews
12A Park Road, Holbeach,
Spalding, Lincs. PE12 7EE
Tel: 01406 490800
Fax 01406 425744
E-Mail: G. R. Merchant @ Merchant. Fi
Co. UK

Project
PROPOSED BUNGALOW & GARAGE,
LOWGATE,
FLEET HARGATE,
SPALDING, LINC'S.

Client
MRS. S. WEE.

Drawing
SITE & LOCATION PLANS.

Job Ref.	Drawing No.
797-03	01
Date: OCT '03	Drawn: GRM

Scales
AS INDICATED.

DO NOT SCALE FROM THIS DRAWING

This drawing is copyright and may not be altered, traced, photographed or used for any other purpose other than that for which it is issued. The General Contractor is to check all dimensions and report any discrepancies to the Architect. All details shown on this drawing including underpinning based upon typical site conditions related to the area. No responsibility accepted for any unusual conditions which may be discovered during construction unless reported and verified on their design commencements may be constructed. Site soil surveys are recommended to ascertain specific site conditions before foundation work is undertaken. This drawing is limited to the amount of information contained and does not purport to include specification of the works, it is solely for the purpose of obtaining Planning / Building Regulations approval. This drawing must not be used as a combined document alone. The works will not be supervised or inspected on site by G R Merchant or any representative thereof. It is the client's or appointed agents responsibility to control workmanship, substitution of materials, adherence to specification, variations to contract etc.
All materials to be new unless otherwise stated and all components and externals etc. to be fixed and installed etc. in strict accordance with manufacturers instruction and relevant codes of practice. Materials shall conform to appropriate British standard specification or BBA certificate. Manufacturers instructions. The Employer / Client shall ensure that the selected contractor is conversant with and adopts all measures necessary to achieve compliance with Health and Safety Regulation for Building Sites and Work places. The Employer / Client is advised that should the project need to comply with the Construction Design and Management Regulations an Independent Planning Supervisor will be required. The works shall comprise of all that is shown on the drawings and details. Work that may not specifically shown but may be reasonably inferred as necessary to carry out the works shall be executed to be inclusive.