Mr M Garner

New Dwelling Next to Capontoft

Cheal Road

Gosberton

Spalding

Lincs, PE11 4JQ

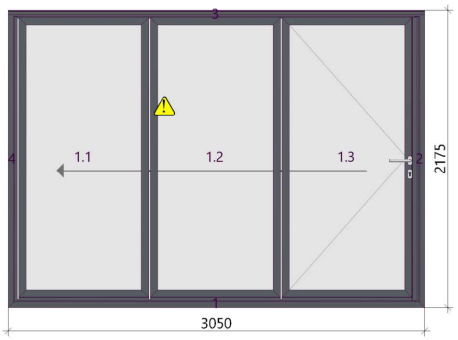
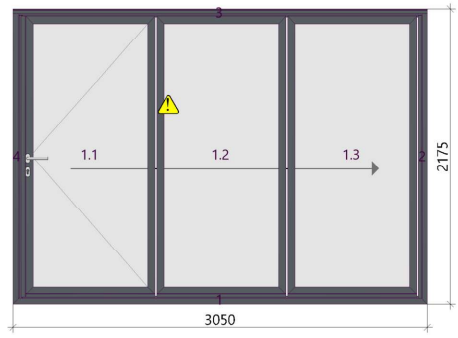
Glazing House
The William Robinson Building
Daleside Road
Nottingham
NG2 4DH
Tel 0115 9418810






14th January 2021





Quotation Ref 3063RevA: Supply & Install Schuco Bifold Doors, Doors & Windows

Dear Sirs,

Further to your enquiry for your property, we have the pleasure in submitting our quotation below as discussed:

1no.	Schuco 3 pane ASS70FD Bifold Door	D1-1		3050mm x 2175mm	£3,710.00 exc vat
1no.	Schuco 3 pane ASS70FD Bifold Door	D1-2		3050mm x 2175mm	£3,710.00 exc vat
6no.			Integral Blinds with 6.8mm laminated outer pane	Additional Cost	£1,345.00 exc vat

1no.	Schuco AWS70HI Glazed Door	D1-3		1000mm x 2075mm	£1,565.00 exc vat
1no.	Schuco AWS70HI Glazed Door	D5-1		1000mm x 2075mm	£1,565.00 exc vat
2no.	Schuco AWS70SC Window	W4-1 W5-1		915mm x 1050mm	£1,250.00 exc vat
1no.	Schuco AWS70SC Window	W6-1		915mm x 900mm	£600.00 exc vat
1no.	Schuco AWS70SC	W7-1		750mm x 2025mm	£630.00 exc vat
1no.	Schuco AWS70HI Tilt Turn Window	W7-2		1800mm x 2025mm	£1,460.00 exc vat

Option	Schuco ADS70Hi Double Door	W7-2		1800mm x 2025mm	£2,400.00 exc vat
1no.	Schuco AWS70SC Window	W8-1		1500mm x 900mm	£1,165.00 exc vat If 1800mm same price
1no.	Schuco AWS70SC Window	W8-2		1800mm x 1900mm	£1,505.00 exc vat
4no.	Schuco AWS70SC	W14-1 W11-1 W1-3 W1-2		1800mm x 1050mm	£4,880.00 exc vat

Glass to Doors

28mm double glazed units. 4mm clear toughened, 20mm Swiss black spacer – argon gas filled cavity, 4mm toughened Pilkington S1 Low E (centre pane U value 1.0w/m2K). 6.8mm laminated pane where specified

Powder coated to single standard RAL colour

Notes

1. We have not included any building works. It is assumed the existing opening is structurally sound and has a structural lintel at the head.
2. Lead Time approx. 6-8 working weeks for aluminium.
3. We have included to site survey.
4. Double glazed units manufactured to comply with document N and document L.

Payment terms

Payment terms are 50% deposit on order with balance payable 7 days after completion.

Prices do include VAT as we understand build is VAT exempt, if this is not the case VAT should be added at the prevailing rate.

Normal working hours only are allowed for.

The prices will be held for a period of 3 months.

Kind Regards

David Leeming