
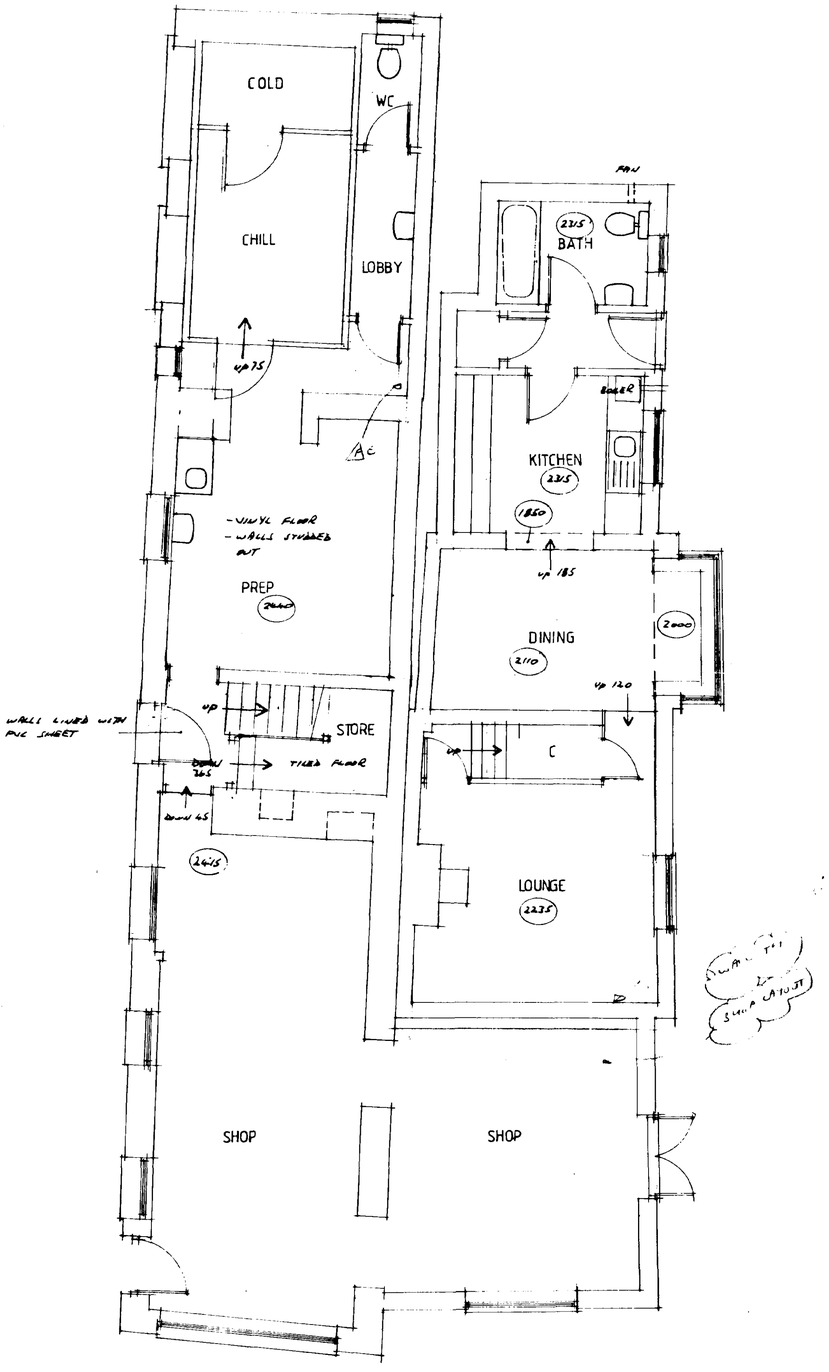


GROUND FLOOR

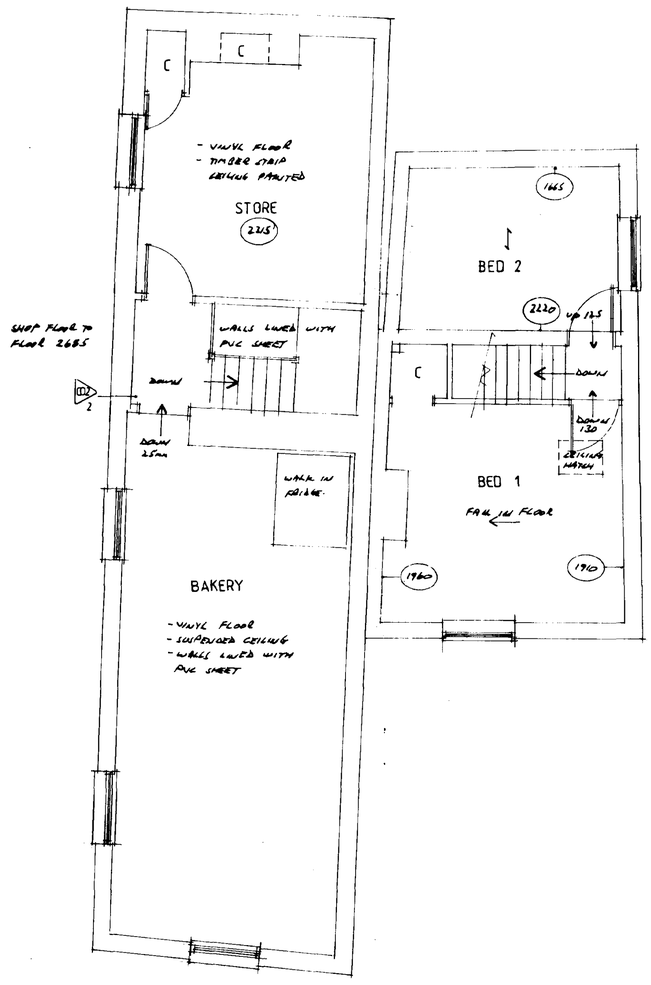

FIRST FLOOR

SHDC
Planning & Development
15 OCT 2002
Ref 1131/02

DETERMINED PLAN

Contractor To Check All Dimensions On Site Before Work Commences.

Rev.	Date.	Init.	Revision Details.

PODDINGTONS
Architectural Design Consultants
Rabbit Hollow, Church Lane, North Rauceby, Sleaford, Lincs. NG34 8QU
Tel. (01529) 488033 Fax. (01529) 488044

Project.
PROPOSED ALTERATIONS AT 41, HIGH STREET, GOSBERTON, FOR MR T. SHARPE.

Drawing.
PLAN AS EXISTING

Scale.	Drawing. No.
1-50	3097-1
Drawn.	
Date. AUG 2002	Rev.

NOTES

1 WALLS – HIGH QUALITY FOODSAFE HYGIENIC PVC CLADDING SYSTEM/FRAMED ON SITE. HYGIENICALLY SEALED JOINTS. FIXED TO PLASTERED WALLS WITH ADHESIVE (ALTRO WHITERISK OR SIMILAR)


2 FLOOR – NON SLIP HYGIENIC VINYL FLOORING WITH WELDED JOINTS & COVED SKIRTINGS ALL ROUNDABOUT (EG ALTRO OR SIMILAR)

3 CEILINGS – TO BE GLOSS PAINTED


4 LIGHTING – VAPOUR PROOF HIGH FREQUENCY FLUORESCENTS WITH COOL WHITE TUBES ALL TO GIVE HIGH LEVEL OF ILLUMINATION. (LUX LEVEL TO BE AS AGREED WITH ENVIRONMENTAL HEALTH DEPT)

5 MISC – REMOVABLE GRILLES FITTED TO WINDOWS
– INSECT LUMINATORS TO BE FITTED TO SANDWICH MAKING ROOM.


THIS AMOUNT TO GROUND FLOOR AREA OF FORMER DWELLING.

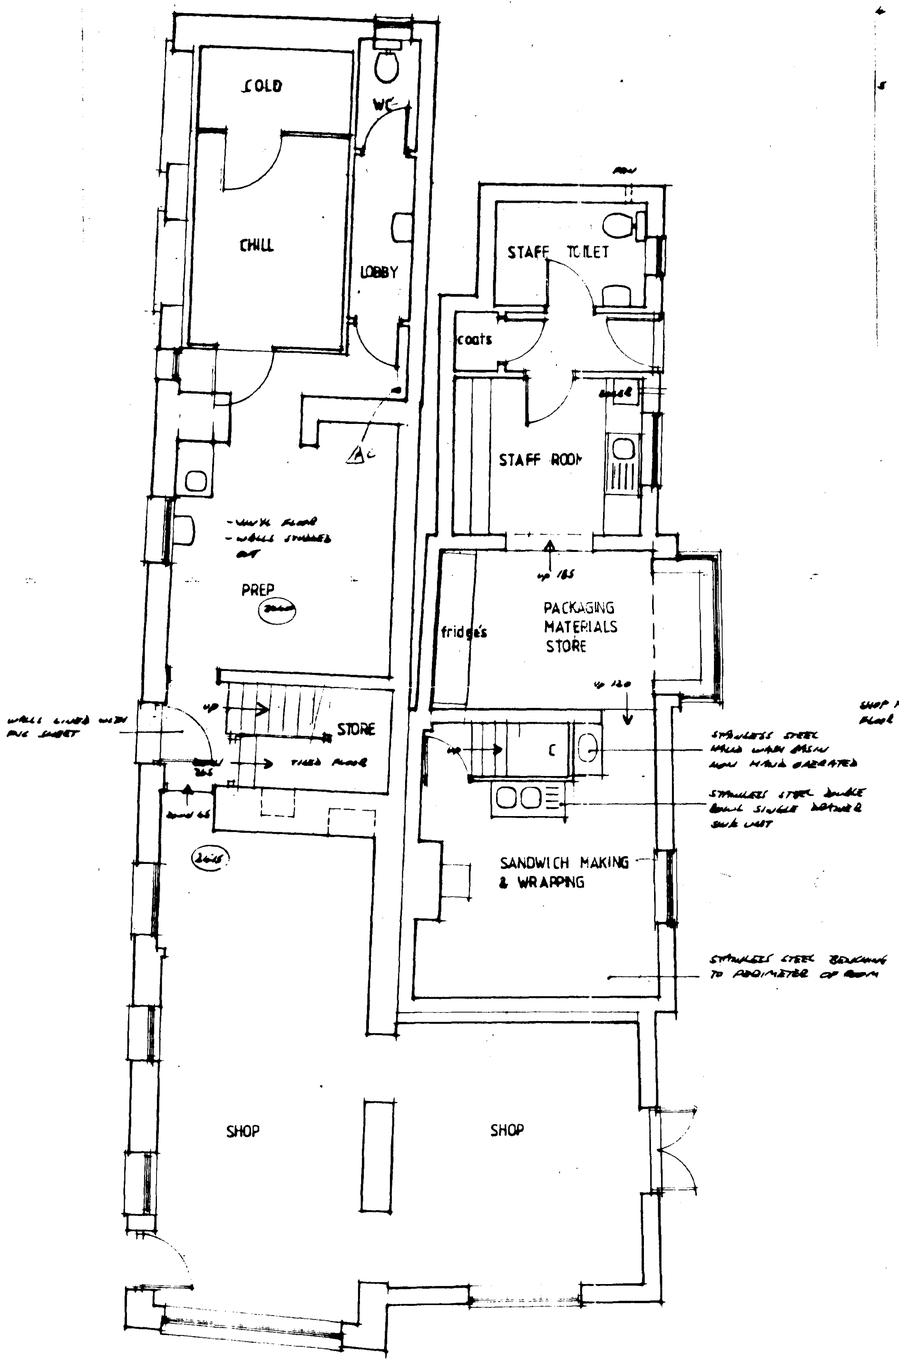


GROUND FLOOR

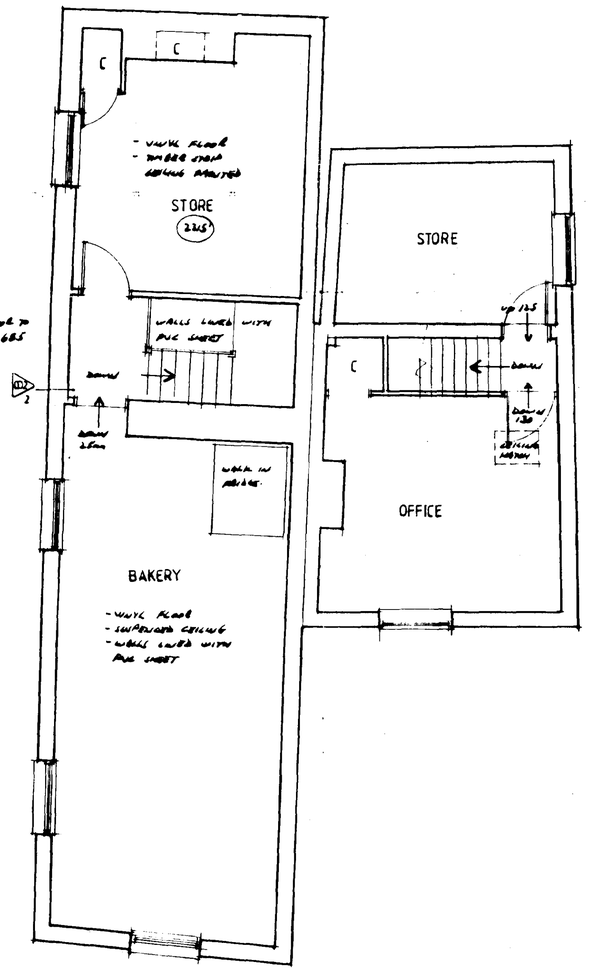

FIRST FLOOR

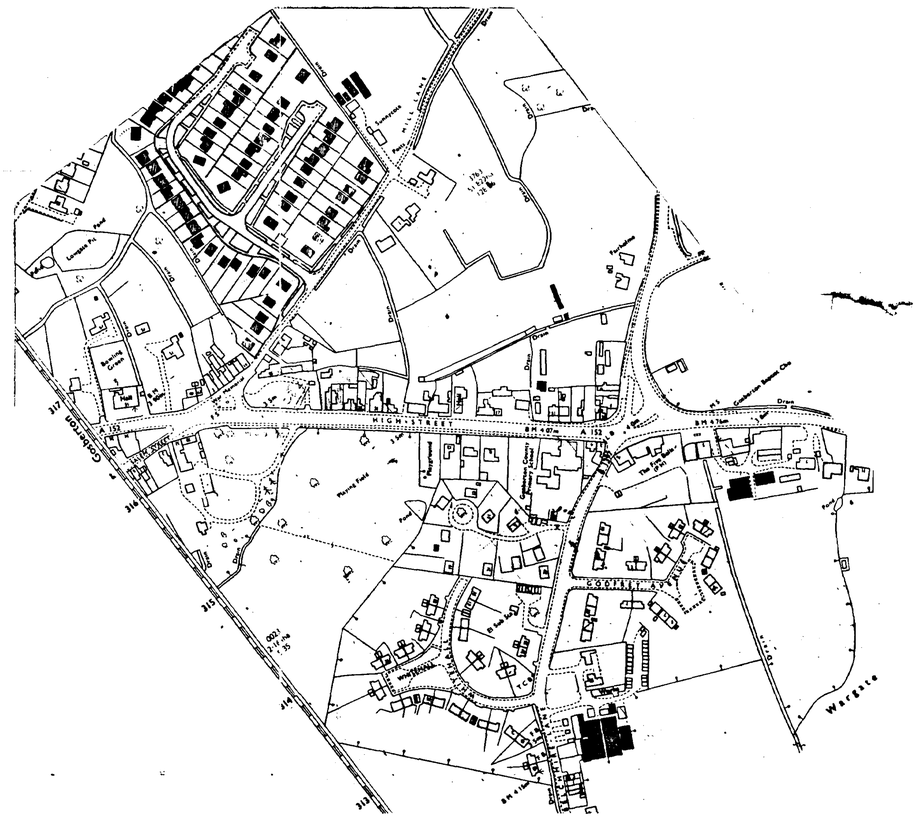

LOCATION PLAN scale 1-2500

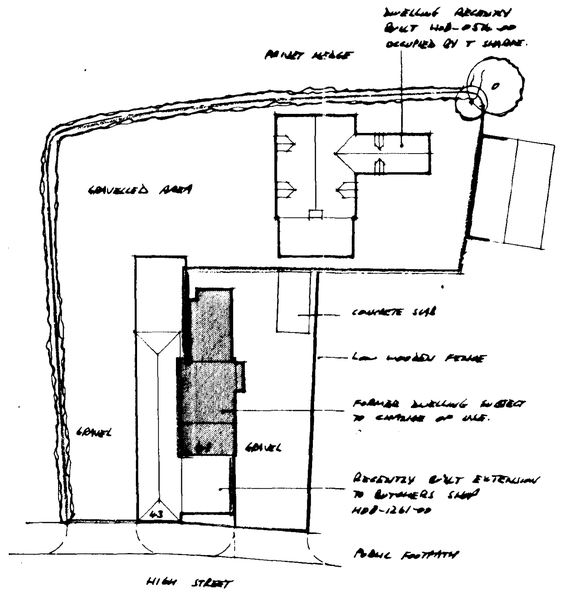

SITE PLAN scale 1-250

SHDC
Planning & Development
15 OCT 2002
Ref 1134/02

DETERMINED PLAN

Contractor To Check All Dimensions On Site Before Work Commences.

Rev.	Date	Init.	Revision Details

PODDINGTONS
Architectural Design Consultants
Rabbit Hollow, Church Lane, North Rauceby, Sleaford, Lincs. NG34 8QU
Tel. (01529) 488033 Fax. (01529) 488044

Project.
PROPOSED ALTERATIONS AT 41, HIGH STREET, GOSBERTON, FOR MR T. SHARPE.

Drawing.
PLAN AS PROPOSED

Scale.	Drawing. No.
1-50	3097-2
Drawn.	
Date. AUG 2002	Rev.