SEAGATE HOMES, DAMGATE, HOLBEACH
TREE WORKS SUMMARY

Group A – Rear of Plots 172–179

Poplars (TPO): Reduce height by up to 6 m; reduce laterals toward gardens by up to 33%

Collapsed/Dead Trees: Remove collapsed tree; remove dead standing trees >3 m (retain smaller stumps), remove dead wood >25 mm; remove/sever ivy

Hedgerow: Cut back to boundary; reform hedge line

Willows: Safety works (removal/reduction of defective stems)




Group B – Rear of Plots 121–125 (not yet constructed)

Poplars (TPO): Reduce height by up to 6 m; reduce laterals toward development by up to 33%

Collapsed/Dead Trees: Remove collapsed tree extending over the site; remove dead standing trees >3 m (retain smaller stumps) remove deadwood >25 mm; remove/sever ivy

Hedgerow: Cut back to boundary; reform hedge line

Willows: Safety works (removal/reduction of defective stems)

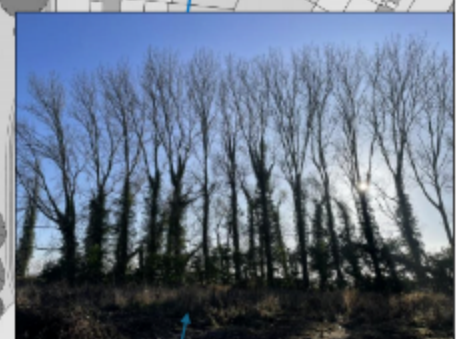

Group C – Boundary Adjacent to Attenuation Ponds

Poplars (TPO): No works proposed

Hedgerow: Hedgerow works in this section optional

Willows: Safety works (removal/reduction of defective stems)

GROUP A – REAR OF 172-179

GROUP C – REAR OF ATTENUATION PONDS

GROUP B – REAR OF 121-125

WORKS LEGEND: TPO WORKS TO POPLARS | NON TPO WORKS TO POPLARS | HEDGEROW WORKS | WILLOW WORKS

PREPARED BY CAROLINE HALL, DECEMBER 2025