LANDSCAPING & TREE PLANTING SCHEME

A	SILVER BIRCH (BETULA PENDULA) FEATHERED
B	RED HAWTHORN (CRATAEGUS PAULS SCARLET) FEATHERED
C	WHITEBEAM (SORBUS ARIA LUTESCENS) FEATHERED
D	BEECH (FAGUS SYLVATICA) FEATHERED
E	TURKISH HAZEL (CORYLUS COLURNA) FEATHERED
F	1.8 METRE HIGH CLOSE BOARDED FENCE
G	FRONTAGE FEATURE WALL (SET BACK 3 METRES FROM ROAD)
H	SIDE BOUNDARY FEATURE WALL
J	REAR FEATURE WALL

All planting to be in accordance with BS 4428:1989 and amendment No. 1 (1991)

All trees to be planted with minimum 0.6m plastic mulch mat and to be staked, tied and tubed.

1/3 to 1/2 bag of peat free tree and shrub planting compost to be incorporated into backfill for each tree hole.

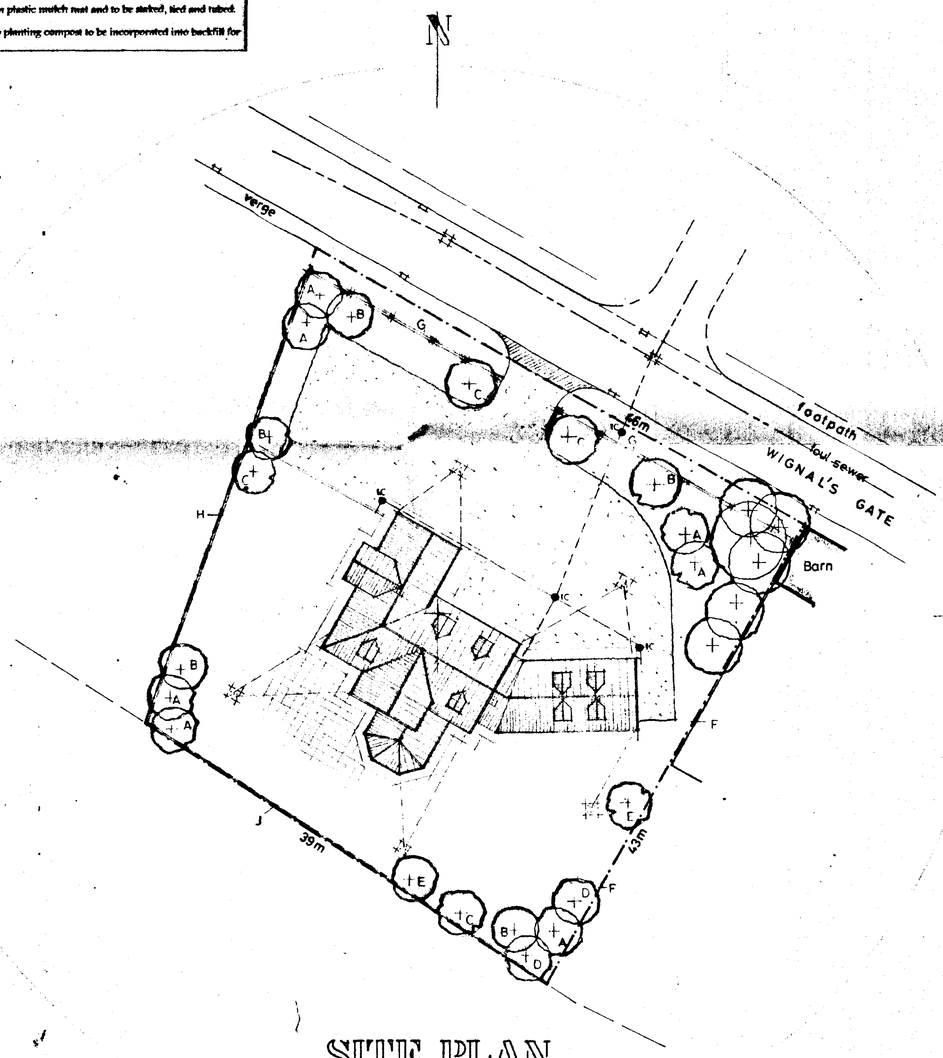

SITE PLAN

1 : 250

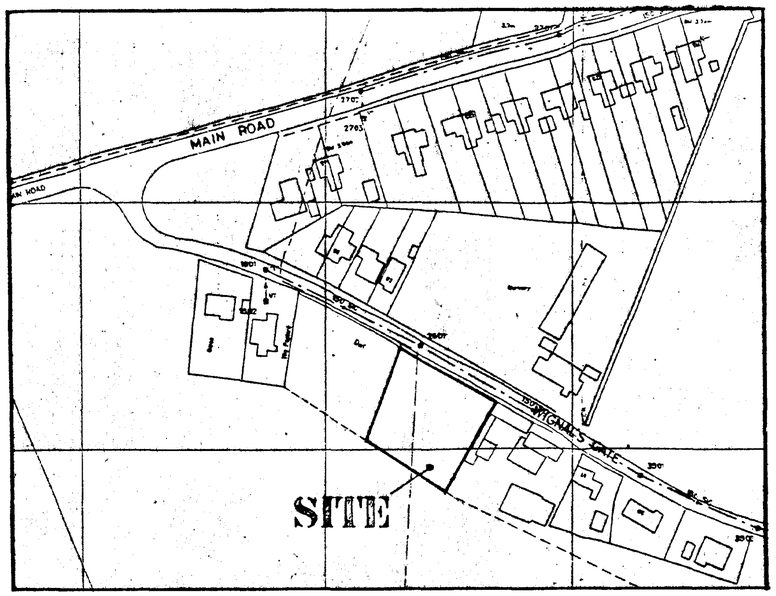

LOCATION PLAN

1 : 1250

DETERMINED PLAN

SOUTH HOLLAND DC
HOUSING & PLANNING
15 NOV 2000
Ref: 1352/00

A 18.8.99 3 DEGS AMENDMENTS - SOMEWAYS

G. R. MERCHANT
I.ENG AMICE, FIWO,
ARCHITECTURAL, STRUCTURAL
& LAND DRAINAGE CONSULTANT
TEL: HOLBEACH (01406) 490800

PROJECT:
HOUSE & GARAGE
WIGNALS GATE
HOLBEACH

CLIENT:
MR & MRS M. REEVE

SCALES:	DATE:
AS INDICATED	*APRIL 1999*
G.R.MERCHANT	DRAWING No.: *MR.01 A*

REVISIONS:
A

DO NOT SCALE FROM THIS DRAWING
This drawing is copyright and may not be altered, traced, photographed or used for any purpose other than that for which it is issued.
The General Contractor is to check all dimensions on site and report discrepancies to the Architect.
All details shown on this drawing including foundations are based upon typical site conditions related to the area. No responsibility can be accepted for abnormal conditions which may be discovered during construction unless reported to the Architect so that design amendments may be considered. Site soil surveys are recommended in respect of foundations to establish specific site conditions before foundation work is undertaken.

SUMMIT 1217