
ITEM E


EXISTING



PROPOSED

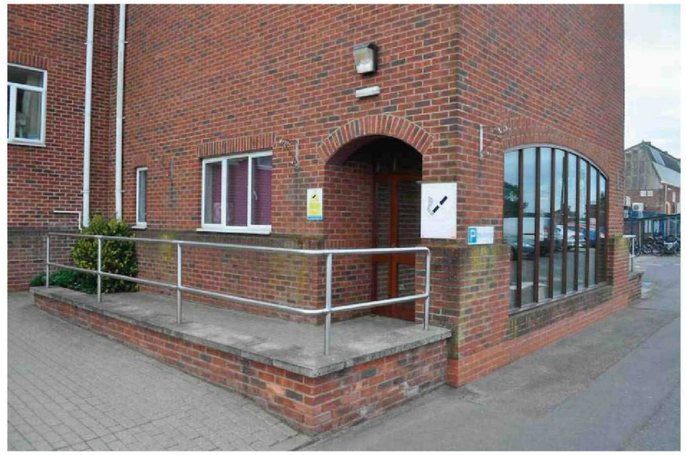

EXISTING

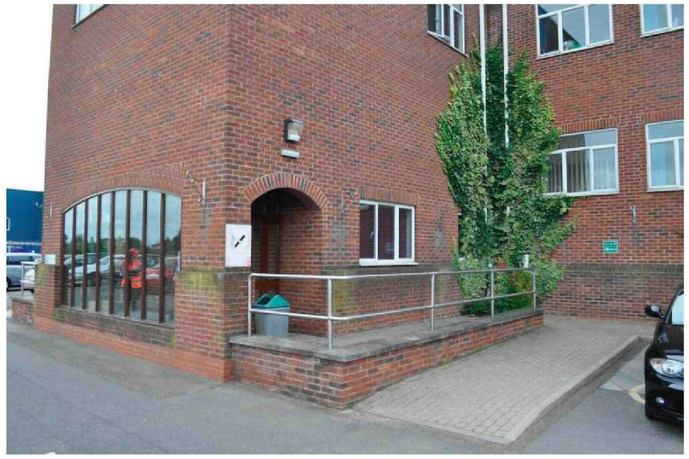

PROPOSED







2 OFF

DIGITAL PRINT ONTO WHITE VINYL
WITH A MATT LAMINATE
MOUNTED TO 3MM COMPOSITE
ALUMINIUM PANEL
FIXED TO BRICK ABOVE ENTRANCE
USING 25MM ALI ANGLE
JOGGLE FIXING

EXISTING FLOOD LIGHT
TO BE RE-SITED BY PLANT ELECTRICIAN

ALL ARTWORK SHOWN ARE FOR POSITIONAL PURPOSES ONLY.
FINAL ARTWORK TO BE SUPPLIED BY TAYBURN.

PLANNING REQUIRED FOR ADVERTISING CONSENT
WITH SOUTH HOLLAND COUNCIL

JOB NUMBER ENQ

SCALE 1:10

DRAFT

FOR APPROVAL ONLY
DO NOT MANUFACTURE
FROM THIS DRAWING

1	00/00/00	REV	DATE:	REV	DATE		
REV	DATE:	REV	DATE:	REV	DATE		
REV	DATE:	REV	DATE:	REV	DATE		

Colour Specification

Please note that colours supplied as cmyk will print differently on various media/machines and will not match if printed at a later date.
Please supply pantone colours if a colour match is needed.

PMS 281

30% CYAN

PMS 485

Print - Specification

☑ FACE PRINT ☐ REVERSE PRINT

Vinyl Cutting - Specification

☑ FACE CUT ☐ REVERSE CUT

VISUAL

LONG SUTTON SIGNAGE

FOREST

+44 (0)1282 694949

This document is confidential and intended solely for the use of the individual or entity to whom it is addressed. It must not be copied, shown or circulated to anyone else without the express permission of Forest.