All plots to have independent 7kW electric vehicle car charger - car chargers to be socketed universal type chargers.

KEY

EV Car Charging Point fitted on Post with electric cable ducted back to plot.

EV Car Charging Point fitted on Elevation of Garage / House

TYPICAL ELECTRIC VEHICLE CAR CHARGER

Plot Schedule		
Plot No	House Type	Type
101	MERE	GARAGE
102	LOCK	GARAGE
103	LOCK	GARAGE
104	HUNTINGDON	GARAGE
105	HUNTINGDON	GARAGE
106	LOCK	GARAGE
107	RUTLAND-V	GARAGE
108	AVON	GARAGE
109	AVON	GARAGE
110	HUNTINGDON	GARAGE
111	MERE	GARAGE
112	LOCK	GARAGE
113	MERE	GARAGE
114	USK	POST
115	USK	POST
116	USK	POST
117	LOCK	GARAGE
118	LOCK	GARAGE
119	LOCK	GARAGE
120	MERE	GARAGE
121	A1120	HOUSE
122	A1120	POST
123	USK-V	POST
124	USK-V	POST
125	AIRE-V	POST
126	AIRE-V	POST
127	AIRE-V	POST
128	USK-V	POST
129	USK-V	POST
130	USK-V	POST
131	AIRE-V	HOUSE
132	AIRE-V	HOUSE
133	USK-V	POST
134	USK-V	POST
135	USK-V	POST
136	AIRE-V	POST
137	AIRE-V	HOUSE
138	USK-V	HOUSE
139	USK-V	POST
140	USK-V	POST
141	USK-V	HOUSE
142	USK-V	POST
143	USK-V	HOUSE
144	AIRE-V	HOUSE
145	AIRE-V	HOUSE
146	AIRE-V	POST
147	AIRE-V	HOUSE
148	USK-V	POST
149	USK-V	POST
150	USK-V	POST
151	USK-V	POST
152	AIRE-V	HOUSE
153	AIRE-V	POST
154	AIRE-V	HOUSE
155	AIRE-V	HOUSE
156	AIRE-V	HOUSE
157	AIRE-V	HOUSE
158	AIRE-V	HOUSE
159	USK-V	HOUSE
160	USK-V	POST
161	USK-V	HOUSE
162	AIRE-V	HOUSE
163	AIRE-V	HOUSE
164	AIRE-V	HOUSE
165	AIRE-V	HOUSE
166	AIRE-V	POST
167	AIRE-V	POST
168	AIRE-V	POST
169	AIRE-V	POST
170	USK-V	HOUSE
171	USK-V	POST
172	USK-V	POST
173	USK-V	POST
174	USK-V	POST
175	USK-V	HOUSE
176	USK-V	POST
177	USK-V	HOUSE
178	USK-V	HOUSE
179	USK-V	POST
180	USK-V	HOUSE
181	USK-V	HOUSE
182	USK-V	POST
183	USK-V	HOUSE
184	USK-V	POST
185	USK-V	HOUSE
186	A575	POST
187	A575	POST
188	A575	POST
189	A575	POST
190	AIRE-V	POST
191	AIRE-V	HOUSE
192	AIRE-V	HOUSE
193	AIRE-V	HOUSE
194	AIRE-V	POST
195	AIRE-V	HOUSE
196	AIRE-V	HOUSE
197	AIRE-V	HOUSE
198	MERE	GARAGE
199	USK	POST
200	USK	POST
201	MERE	GARAGE
202	HUNTINGDON	GARAGE
203	LOCK	GARAGE
204	AIRE	GARAGE
205	AIRE	GARAGE
206	MERE	GARAGE
207	USK	POST
208	USK	POST
209	USK	POST
210	RUTLAND-V	GARAGE
211	HUMBER	GARAGE
212	HUMBER	GARAGE
213	BAIN	GARAGE
214	SEVERN-V	GARAGE
215	LOCK	GARAGE
216	SEVERN-V	GARAGE
217	BAIN	GARAGE
218	HUMBER	GARAGE
219	STAMFORD	GARAGE
220	USK	POST
221	USK	POST
222	LOCK	GARAGE
223	LOCK	GARAGE
224	MERE	GARAGE
225	STAMFORD	GARAGE
226	LOCK	GARAGE
227	HUNTINGDON	GARAGE
228	HUNTINGDON	GARAGE
229	STAMFORD	GARAGE
230	SEVERN-V	GARAGE
231	BAIN	GARAGE
232	SEVERN-V	GARAGE

Plot Schedule		
Plot No	House Type	Type
233	STAMFORD	GARAGE
234	RUTLAND-V	GARAGE
235	STAMFORD	GARAGE
236	SEVERN-V	GARAGE
237	RUTLAND-V	GARAGE
238	RUTLAND-V	GARAGE
239	BAIN	GARAGE
240	HUMBER	GARAGE
241	RIBBLE	GARAGE
242	RIBBLE	GARAGE
243	MERE	GARAGE
244	MERE	GARAGE
245	RUTLAND-V	GARAGE
246	RUTLAND-V	GARAGE
247	BAIN	GARAGE
248	RIBBLE	GARAGE
249	HUNTINGDON	GARAGE
250	MERE	GARAGE
251	RUTLAND-V	GARAGE
252	USK	HOUSE
253	USK	HOUSE
254	MERE	GARAGE
255	RUTLAND-V	GARAGE
256	HUNTINGDON	GARAGE
257	HUNTINGDON	GARAGE
258	HUNTINGDON	GARAGE
259	HUNTINGDON	GARAGE
260	MERE	GARAGE
261	HUNTINGDON	GARAGE
262	HUNTINGDON	GARAGE
263	RUTLAND-V	GARAGE
264	MERE	GARAGE
265	RUTLAND-V	GARAGE
266	AVON	GARAGE
267	AVON	GARAGE
268	RIBBLE	GARAGE
269	STAMFORD	GARAGE
270	STAMFORD	GARAGE
271	BAIN	GARAGE
272	RIBBLE	GARAGE
273	BAIN	GARAGE
274	RIBBLE	GARAGE
275	STAMFORD	GARAGE
276	LOCK	GARAGE
277	MERE	GARAGE
278	USK	POST
279	USK	POST
280	RUTLAND-V	GARAGE
281	STAMFORD	GARAGE
282	TAY	GARAGE
283	BAIN	GARAGE
284	STAMFORD	GARAGE
285	HUNTINGDON	GARAGE
286	MERE	GARAGE
287	USK	HOUSE
288	USK	POST
289	USK	HOUSE
290	MERE	GARAGE
291	RUTLAND-V	GARAGE
292	STAMFORD	GARAGE
293	LOCK	GARAGE
294	LOCK	GARAGE
295	STAMFORD	GARAGE
296	RUTLAND-V	GARAGE
297	RUTLAND-V	GARAGE
298	AVON	GARAGE
299	AVON	GARAGE
300	RUTLAND-V	GARAGE
301	MERE	GARAGE
302	RIBBLE	GARAGE
303	RIBBLE	GARAGE
304	MERE	GARAGE
305	LOCK	GARAGE
306	MERE	GARAGE
307	RUTLAND-V	GARAGE
308	MERE	GARAGE
309	TAY	GARAGE
310	HUNTINGDON	GARAGE
311	MERE	GARAGE
312	RUTLAND-V	GARAGE
313	USK	HOUSE
314	USK	HOUSE
315	LOCK	GARAGE
316	STAMFORD	GARAGE
317	RIBBLE	GARAGE
318	LOCK	GARAGE

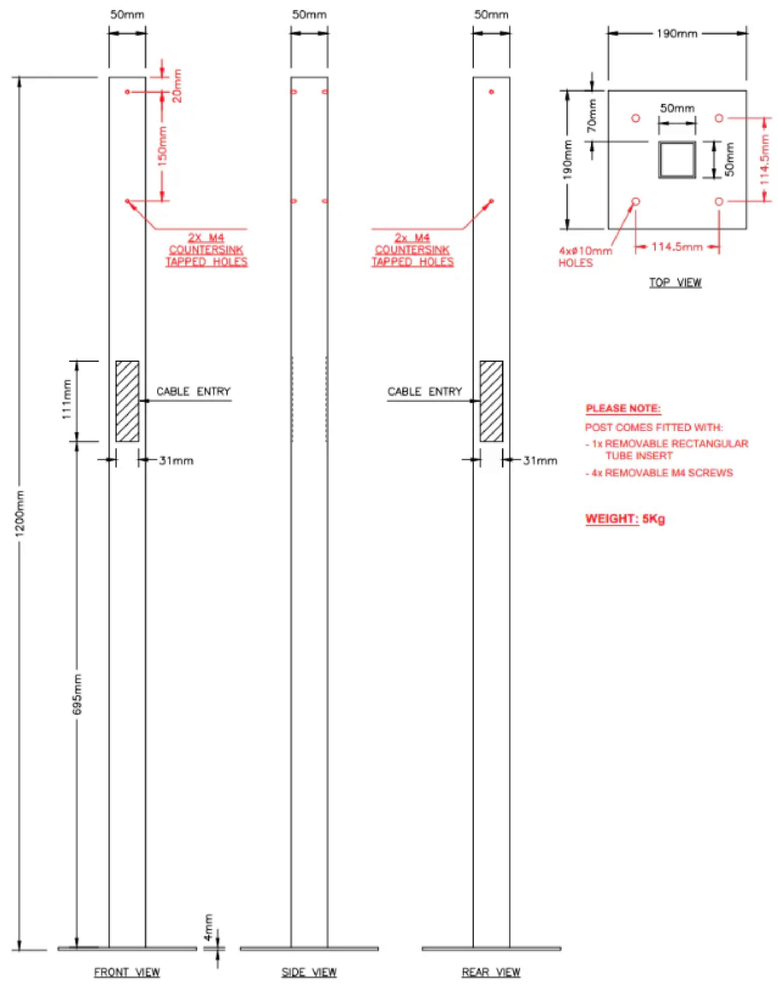

PLEASE NOTE:

POST COMES FITTED WITH:
- 1x REMOVABLE RECTANGULAR TUBE INSERT
- 4x REMOVABLE M4 SCREWS

WEIGHT: 5Kg

RECTANGULAR HOLE ON THE POST REVISED TO MATCH SAMPLE	D	21/11/2022
DISTANCE BETWEEN HOLES ON THE POST REVISED	C	13/10/2022
CABLE ENTRY HOLE SIZES REVISED (MADE SMALLER)	B	07/10/2022
CABLE ENTRY HOLE SIZES UPDATED	A	16/09/2022
REVISION DETAILS:	REV:	DATE:

PROJECT:

CLIENT:

TITLE: 1200MM ZURA / WALLPOD EV MOUNTING SURFACE POST

DWG NO: MCOM0494 — REVISION: D

DRAWN: IR — DATE: 08/09/2022

SCALE: NTS — SIZE: A4

ROLEC

RULPHS LANE, FRAMPTON WEST, BOSTON, LINCOLNSHIRE, ENGLAND, PE20 1QU

WWW.ROLECGRP.COM T: +44 (0)1205 724764

Manufacturer's details for post install for EV Car chargers. All to be installed by Electrician in accordance with Manufacturer's requirements. Max. 2 no. EV Chargers per post.

CHARGERS ON POST TO HAVE A 450 X 450 X 450 CONCRETE BASE

Rev.	Date	Description
A	18.05.2026	Pump station and access amended; footpath connectivity added over CADENT gas main; key updated

ASHWOOD HOMES

1 Goodison Road, Lincs Gateway Business Park, Spalding, Lincs, PE12 6FY **T: 01406 490590**

PROJECT:
Proposed Residential Development at Vernatt's Strategic Urban Extension Phase 1

DRAWING:
Electric Vehicle Chargers
Yews Farm Phase 2
218 Plots

SCALE: 1:500@A0 — DRAWN: GB

DATE: AUG.2025 — REVISION: A

DRAWING No: 74b-EVCP-208