BLOCK PLAN SCALE: 1·500

AULDER TREES, 6·096m - 7·620m high (at maturity). Planted 1·524m apart, approx. 2·438m high.

5m

extension.

7m

Concrete apron to front of building 4·5m wide.

LOADING / UNLOADING AREA

PORTAKABIN

EXTG. S.W. DRAIN

PUMP

DIESEL TANK

1 BUND WITH CONC HARDSTAND DRAIN

Continuous 1·829m high security fence, comprising of concrete posts and wire mesh.

PUMP

NEW I.C.

INTERCEPTOR

NEW INTERCEPTOR

EXISTING FOUL JUNCTION

1·972 Acres

TURNING AREA

NOTE: 150mm consolidated/crushed brick, to turning and parking areas.

PARKING AREA

SKIMMA 914mm - 1219mm high
MOHONIA 305mm - 914mm high
(inter planted for ground cover).

H14/0274/96.

Existing conifers to neighbouring property.

AULDER TREES, 6·096m - 7·620m high (at maturity)
Planted 1·524m apart, approx. 2·438m high.

5Nº AULDER TREES randomly positioned along boundary.


PROPOSED SITING OF SECOND ENTEC INTERCEPTOR

MULTI CHAMBER 2000 LITRES CAPACITY

1) CONNECTION OF WASH INTO FOUL SYSTEM

2) 2000 LITRES CAPACITY

3) INSPECTION CHAMBER INSTALLED PRIOR TO WASH DISCHARGE CONNECTING TO EXISTIN FOUL CHAMBER

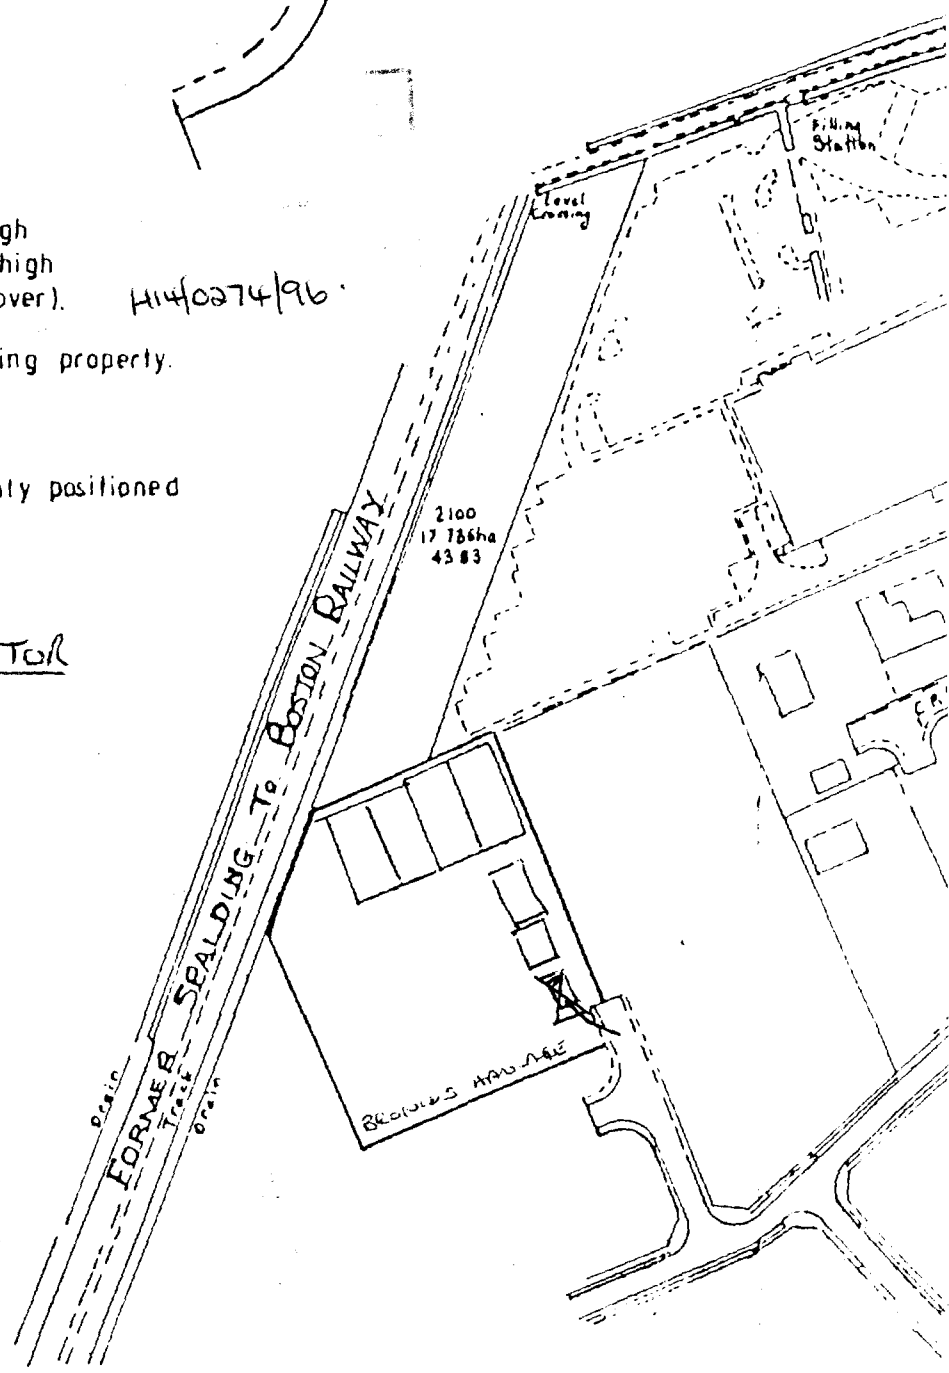

SITE LOCATION SCALE: 1·2500

BRUNCOS HAULAGE LTD