Revisions

–
dd.mm.yyyy - Comments.

Project
Proposed Residential Development, Quadring

Client
Clarke Group

Document
Proposed Materials Schedule

Size
A4

Date
09.01.2025

Copyright © 2025 Core Plus Architects Limited

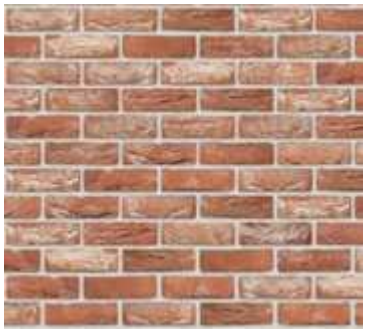
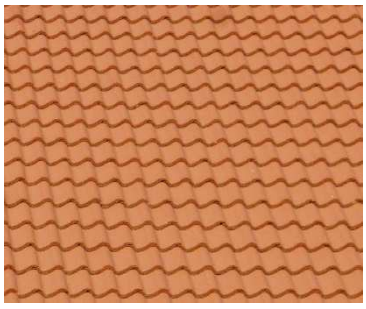
879-2-092

CONTENTS

1.0 Dwelling Materials

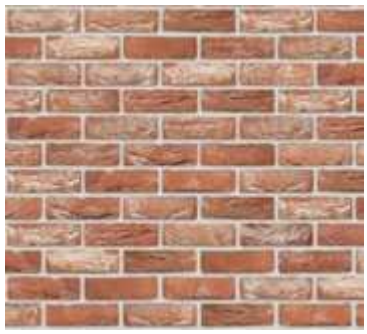
2.0 External Works

1.0 DWELLING MATERIALS

ITEM	ELEMENT	DESCRIPTION	IMAGE
1	External walls	Forterra St Lawrence Mellow Multi Brick	
2	External walls	Vandersanden Cayenne Multi Brick	
3	Roof tile	Condron Senior Slate Tile (plots 03, 04, 06 & 07)	
4	Roof Tile	Condron Concrete Pantile (plots 01, 02 & 05)	
5	Windows	Agate grey uPVC windows	

6	Doors	Agate grey GRP Composite Doors	 

2.0 EXTERNAL WORKS

ITEM	ELEMENT	*DESCRIPTION*	IMAGE
1	Boundary walls	Forterra St Lawrence Mellow Multi Brick	
2	Boundary walls	Vandersanden Cayenne Multi Brick	
3	Shared Private Access Road	Black tarmac (impermeable)	

4	Pavements/ Patios	Marketstone Sandstone Autumn Multi	
5	Private Driveways	20mm round gravel	
7	Fencing (rear boundaries)	1.8m close boarded timber fence (in accordance with approved drawings 879-2-010 and 879-2-320).	
8	Fencing (front boundaries)	1.1m timber post and rail fence (in accordance with approved drawings 879-2-010 and 879-2-320).	