M.D. FOULKES Building Design & Construction Services

P.C Drg N° 2.

10 Bridge Street Spalding.

scale 1:50.

Floor plans General arrangement.


D1 : Denotes. Door & Ref. N°

SF " Shop Front/window.


W1 " Window & Ref N°

L1 " Lining To Opening.


refer to other drg's for details.

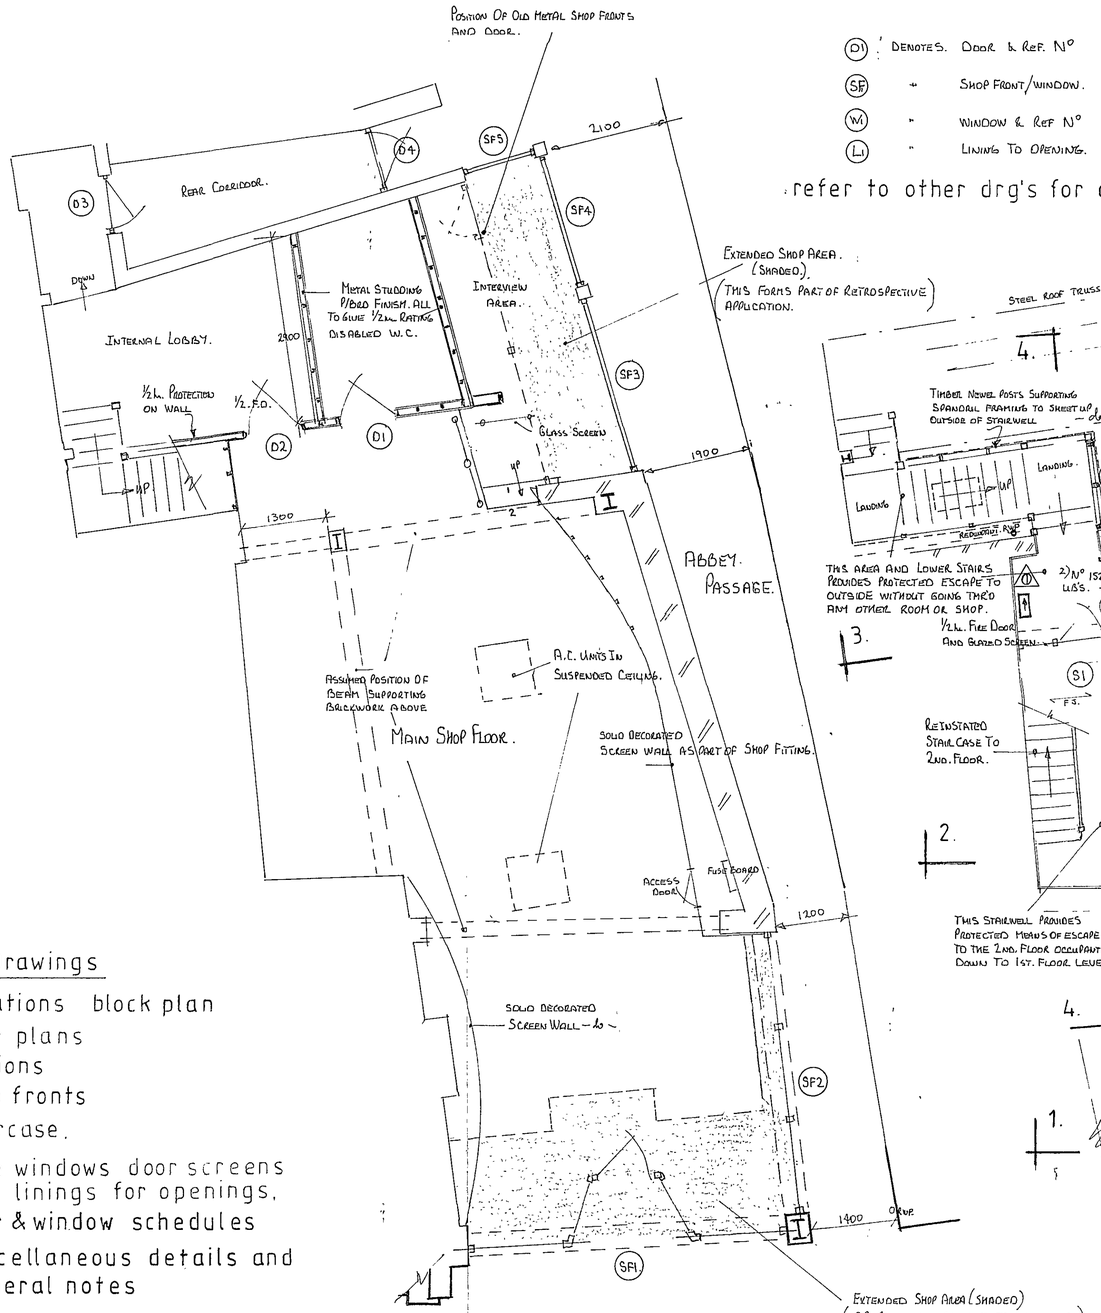

ground floor layout.

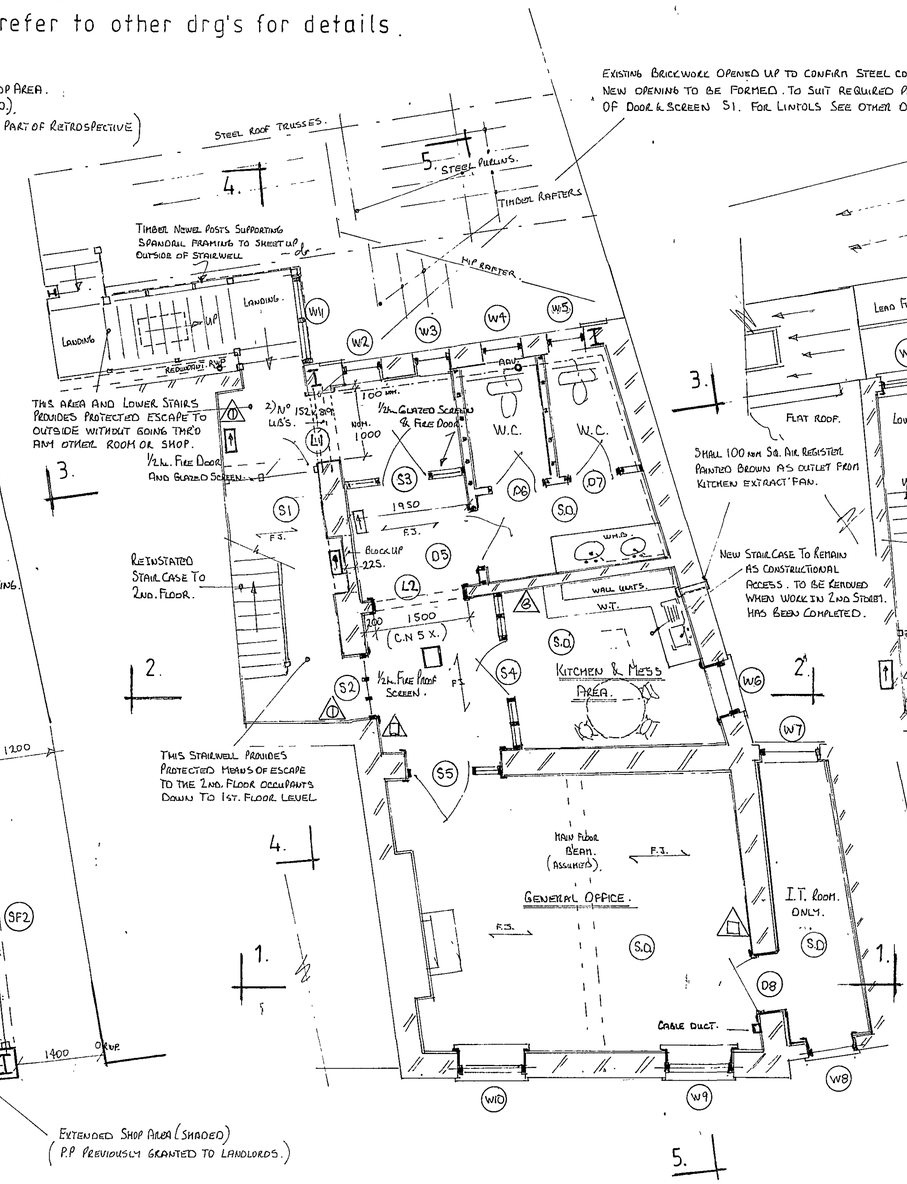

1st. floor

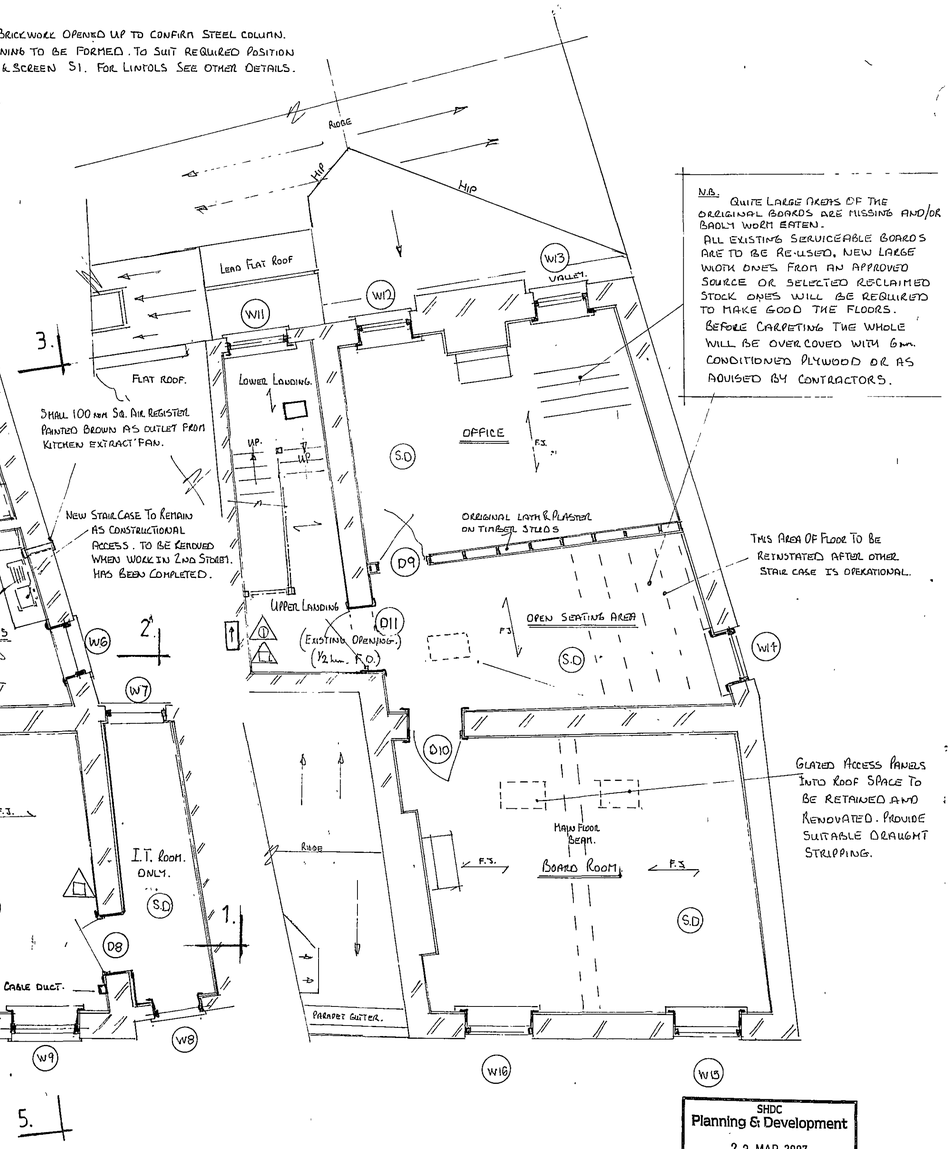

N.B. Quite Large Areas Of The Original Boards Are Missing And/Or Badly Worm Eaten. All Existing Serviceable Boards Are To Be Re-used, New Large Width Ones From An Approved Source Or Selected Reclaimed Stock Ones Will Be Required To Make Good The Floors. Before Carpeting The Whole Will Be Overcoved With 6mm. Conditioned Plywood Or As Advised By Contractors.

This Area Of Floor To Be Reinstated After Other Stair Case Is Operational.

Glazed Access Panels Into Roof Space To Be Retained And Renovated. Provide Suitable Draught Stripping.

2nd floor.

List of Drawings

P.C./1 — elevations block plan
/2 — floor plans
/3 — sections
/4 — shop fronts
/5 — staircase.
/6 — side windows door screens and linings for openings.
/7 — door & window schedules
/8 — miscellaneous details and general notes

Fire Prevention / Escape Suggested Details Only.

1 Water.
2 Powder
3 Fire Blanket.
Emergency Light Ceiling
" " Wall Mounted With Direction Of Escape.
S.D Smoke Detector Head Ceiling Mounted.

SHDC Planning & Development 23 MAR 2007 Ref: 0378/07

DETERMINED PLAN.

P.C. 2.