




COWBIT ROAD SLUICE – CORONATION CHANNEL

- 9.7 It is highly un-likely that a breach will occur in the River Welland along Commercial Road, or even over topping, along this stretch of embankment (Holbeach Road / Commercial Road / High Street) crest levels range from 4.90 m ODN to 5.84 m ODN to provide a minimum freeboard of 0.18m above the 4.72 m ODN peak flow level as identified by the Strategic Flood Risk Assessment (SFRA).

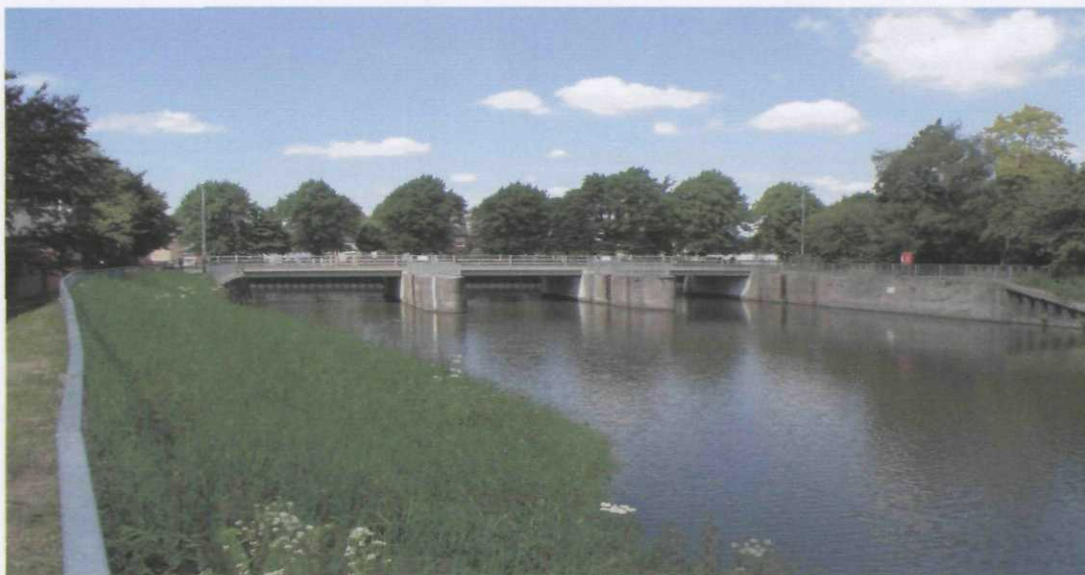

RIVER WELLAND – COMMERCIAL ROAD EMBANKMENT

- 9.8 The Coronation Channel, 700 metres to the South / East at Low Road, has an embankment level of 5.28 m ODN, compared to the peak flow level of 4.72m ODN, as identified by the SFRA, is unlikely to breach or be over-topped.