





First Floor Plan - proposed




North East Elevation - proposed

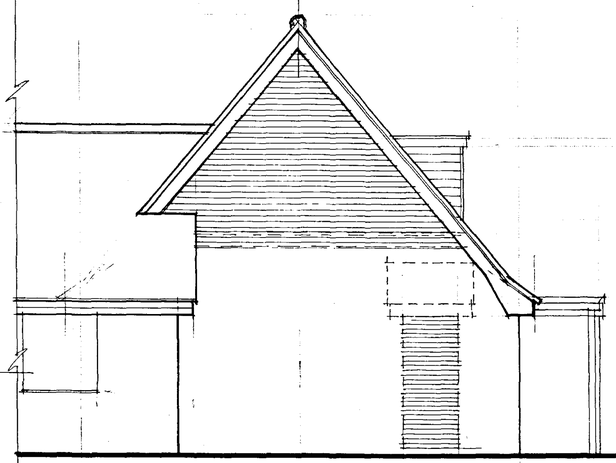


North West Elevation - proposed

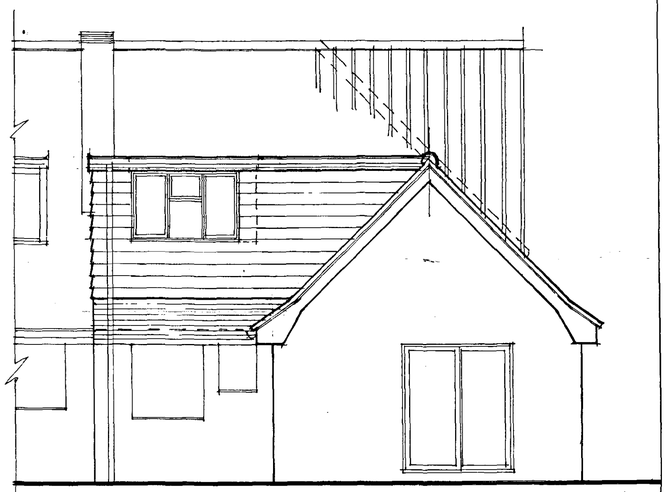

South East Elevation - proposed

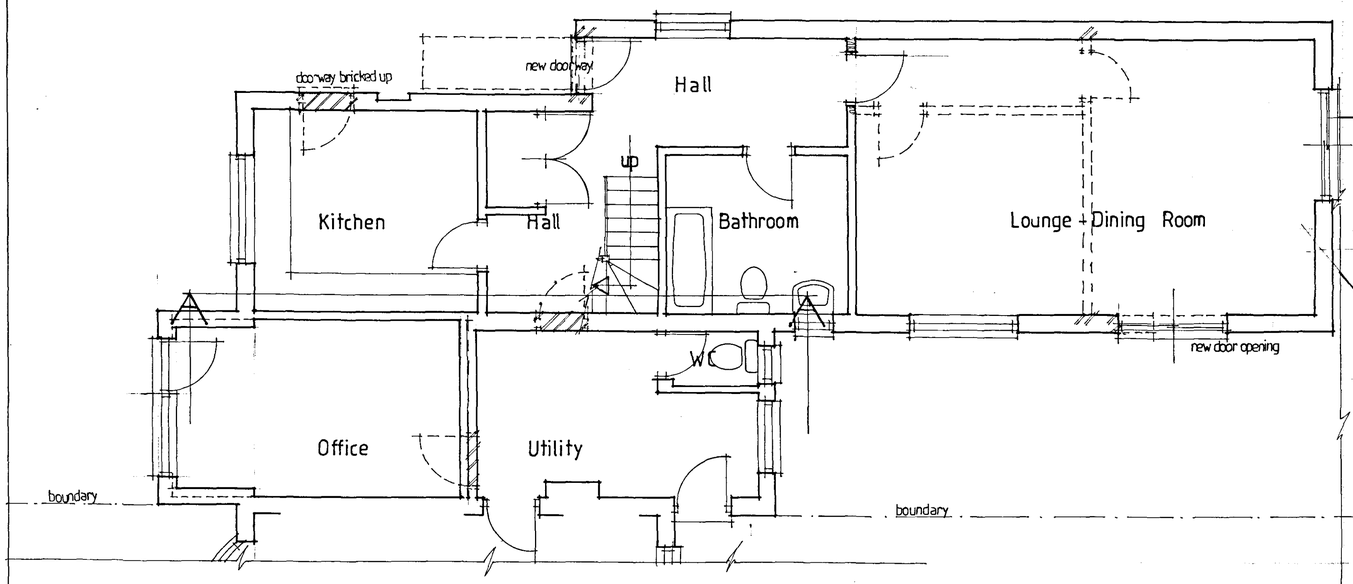

Ground Floor Plan - proposed

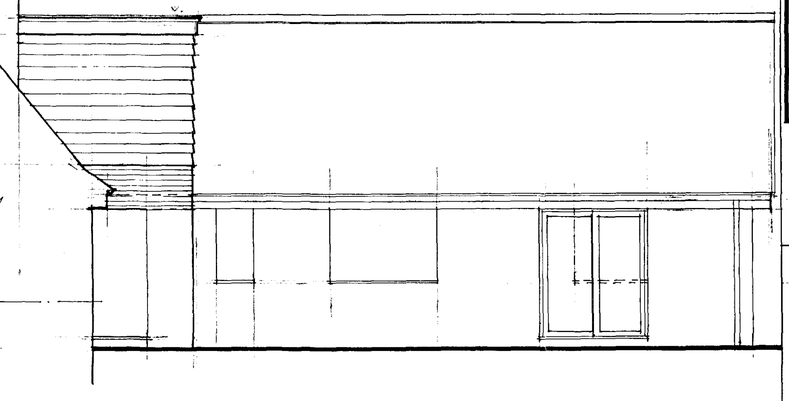

South West Elevation - proposed

SPECIFICATION

1. EXTERNAL FINISHES

Any making good extensions to the external walls are to be in matching brickwork.
Any making good or additional areas of roof covering are to be in matching concrete interlocking tiles.
The new dormers and first floor extension to the rear are to match the existing dormers and be tile hung in matching tiles.
The new windos, doors & frames are to be in PVCu units by a specialist manufacturer to match the existing.
The new boat store is to be in stained timber.

PLANNING & DEVELOPMENT
- 1 JUN 2007
Ref. 07/210

MR S WARD
79A SEAS END ROAD
SURFLEET SPALDING
LINCOLNSHIRE
PE 11 4 DQ
PROPOSED ALTERATIONS

DETERMINED
PLAN

WORKING DRAWING

DRAWING NO.	09 : 29 : 02
DATE	MAY 2007
SCALES	1:50 & 1:100
AMENDMENTS	

bds barnhay design services architectural technologists
The Limes, Cowbridge
Boston, Lincolnshire PE22 7AY
tel & fax 01205 367185
mobile 0788 7787777