LANDSCAPING & TREE PLANTING


A. MIXED HEDGE
   (a) Hawthorn (Crataegus Monogyna)
   (b) Beech (Fagus Sylvatica)
   (c) Blackthorn (Prunus Spinosa)
   (d) Buckthorn (Rhamnos Cathartica)

B. SLIVER BIRCH (BETULA PENDULA) FEATHERED
C. HAWTHORN (CRATAEGUS MONOGYNA) FEATHERED
D. WHITE BEAM (SORBUS ARIA) FEATHERED
E. REMOVE EXISTING CONIFER HEDGE
F. EXISTING CONIFER HEDGE
G. EXISTING BUNGALOW TO BE DEMOLISHED


All planting to be in accordance with BS 4428:1989 and amendment No. 1 (1991)

All trees to be planted with minimum 0.6m plastic mulch mat and to be staked, tied and tubed.

1/3 to ½ bag of peat free tree and shrub planting compost to be incorporated into backfill for each tree hole.

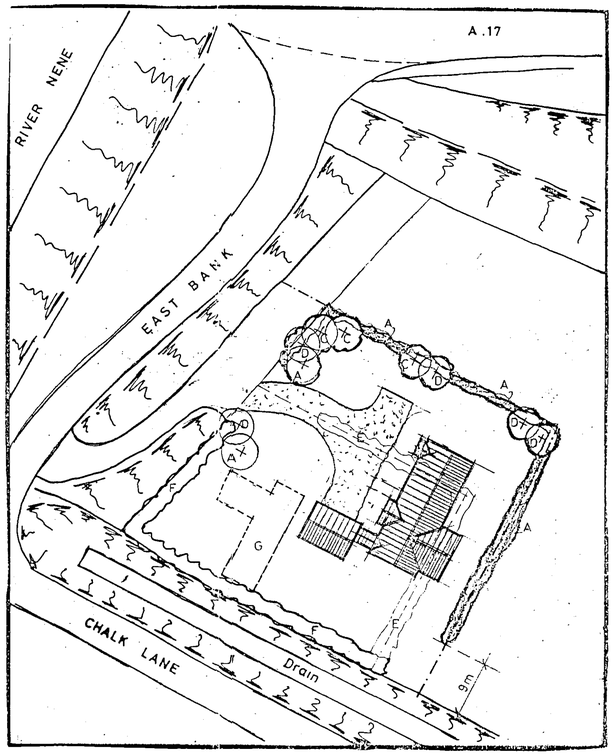

SITE PLAN
1/500

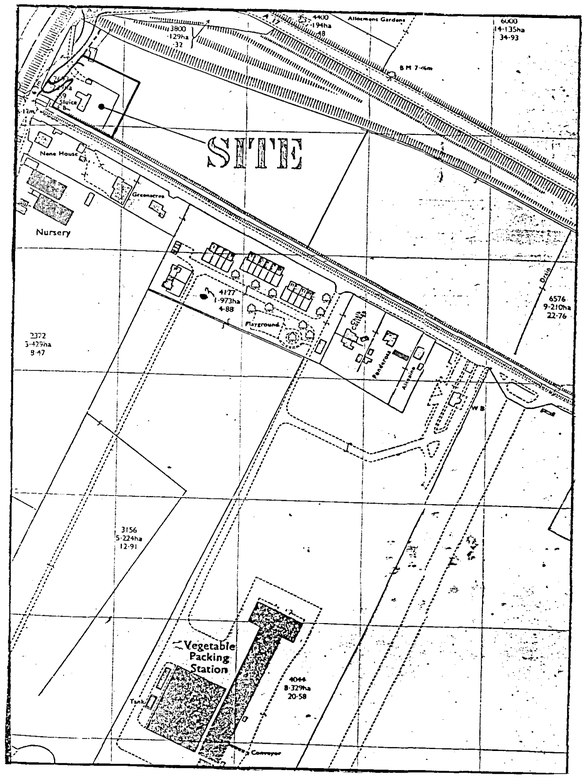

LOCATION PLAN
1/2500

Planning & Development
18 APR 2005
Ref: 0112/04

AMENDED PLAN
Ref. A1

G. R. MERCHANT C.Eng
I.ENG AMICE FIWO
ARCHITECTURAL, STRUCTURAL AND LAND DRAINAGE CONSULTANTS
Unit 4, Wrights Mews
12A Park Road, Holbeach,
Spalding, Lincs. PE12 7EE
Tel: 01406 450600
Fax 01406 426744
E-Mail: G. R. Merchant @ Merchant. Fsnet. Co. UK

Project
BUNGALOW & GARAGE.
EAST BANK.
SUTTON BRIDGE.
SPALDING. LINC'S.

Client
MR. & MRS. A. J. WAYMAN.

Drawing
LOCATION & SITE PLANS.

Job Ref.	Drawing No.
778-03	04
Date: JAN '04	Drawn: GRM

Scales
AS INDICATED.

DO NOT SCALE FROM THIS DRAWING

This drawing is copyright and may not be altered, reused, photographed or used for any other purpose than that for which it is issued. The General Contractor is to check all dimensions on site and report any discrepancies to the Architect. All dimensions on this drawing are in millimetres unless otherwise noted. The Architect is not responsible for any errors or omissions in the information supplied by the consultant engineer, quantity surveyor or specialist for abnormal conditions which may be encountered during excavation unless instructed by the Architect as their design and materials were to be amended. We shall not be responsible for any cost in respect of foundations to associated specific site conditions before foundation work is commenced. This drawing is limited in the amount of information contained and does not purport to contain a full specification of the works. It is solely for the purposes of obtaining Planning / Building Regulation approval. This drawing must not be used as a contract document works. This works will not be supervised or inspected on site by G.R. Merchant or any representative thereof. It is the client or their appointed agents responsibility to contract commencing, submission of materials, adherence to specification, variations to contract etc.

All materials to be new unless otherwise stated and all components and materials etc. to be used fitted and installed etc. in strict accordance with manufacturers instruction and relevant code of practice, Materials and conditions to accompanies British standard specification or BBA certificate or European equivalent. The Employer / Client and ensure that the associated contractor is conversant with and adheres to the requirements of to extreme compliance with Health and Safety regulation for Building sites and those relevant to Employer / Client is advised that should the works need to comply with the Construction Design and Management Regulations an appointed Planning Supervisor will be required. The works and comprises of all that is shown on the drawing and details. Work that may not specifically shown but reasonably to be inferred as necessary to