
3.15 x 2.24 guage galvanised core plastic coated chainlink netting

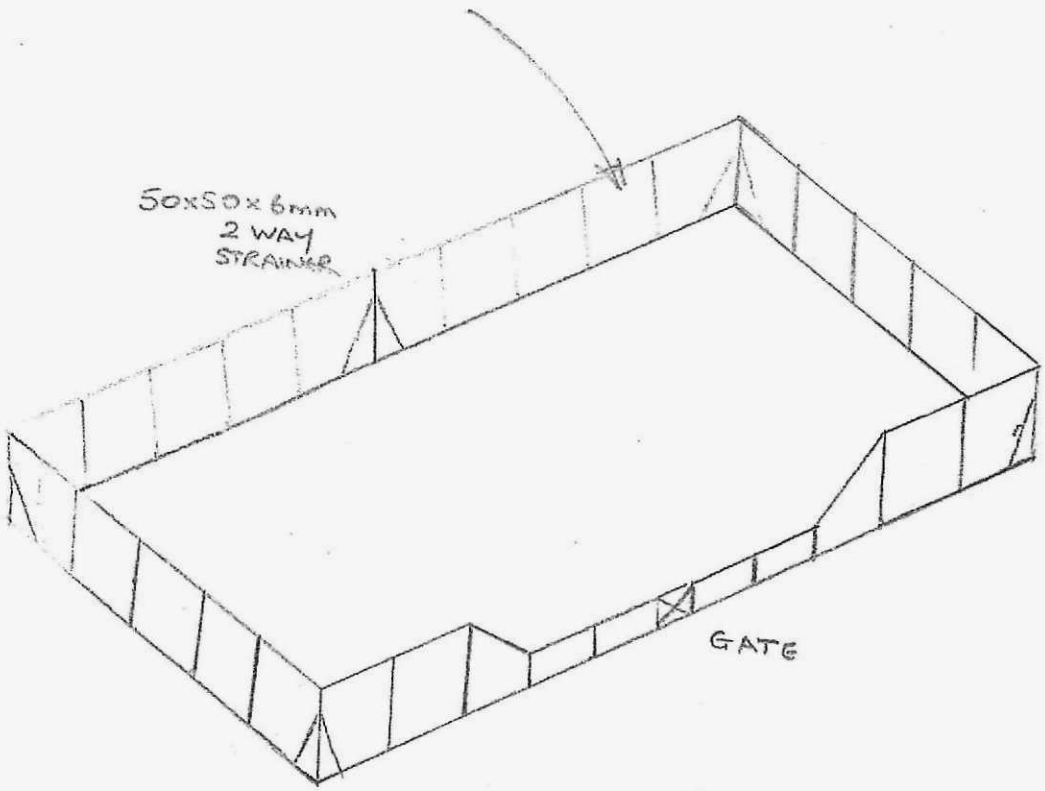

9' HIGH SURROUND C/W DROPPED SIDE

ALL IRONWORK ANGLED AND GALVANISED

BOTTOM HOLE SHOULD BE 25mm above kerb.

All posts to be evenly spaced.

All posts to be securely set in 1:2:4 concrete.

SHDC
Planning & Development
10 AUG 2011
Ref: 0617-11