



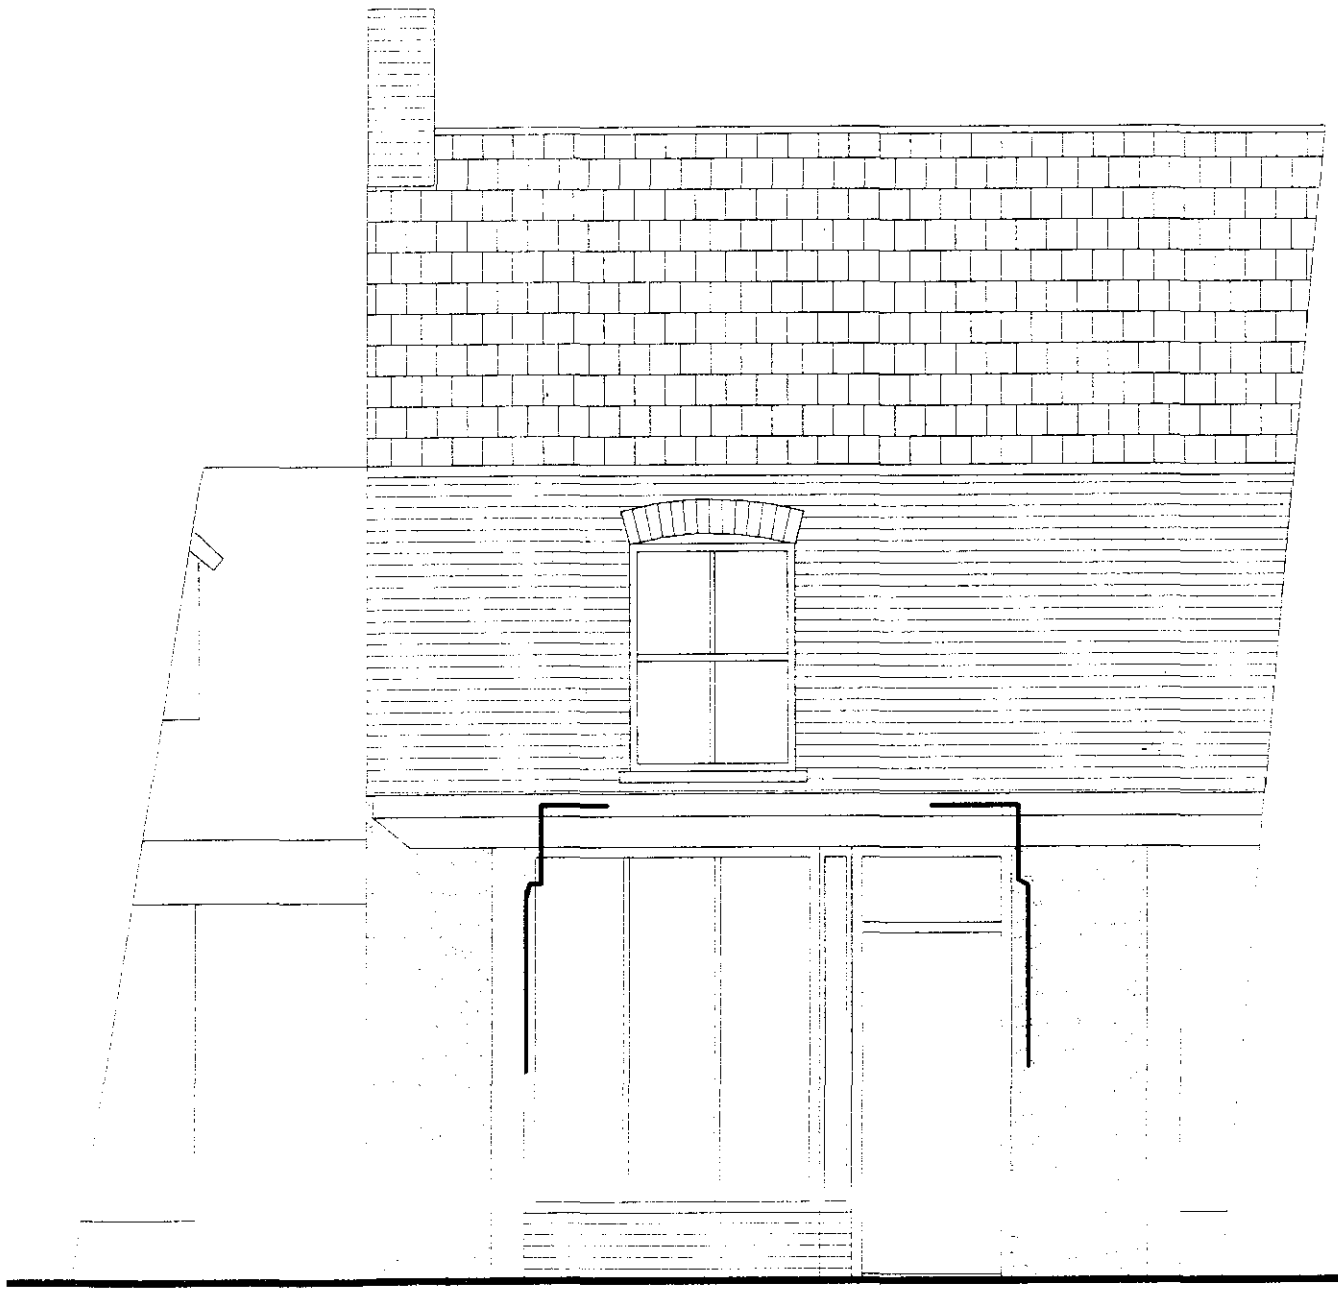


0763/00

Build up existing walling as shown and provide 20mm sand cement render to match existing. Then provide window and door by Rugby Joinery Ltd. Door code:-FN5- DOR31D and Window code:- VS1016VB. Provide over openings IG Ltd. BOX lintels of appropriate length.

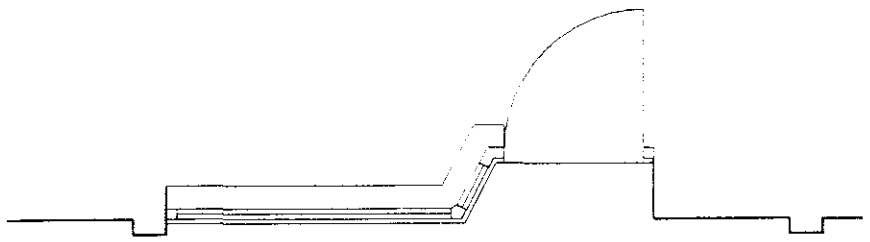

PLAN AND ELEVATION AS EXISTING

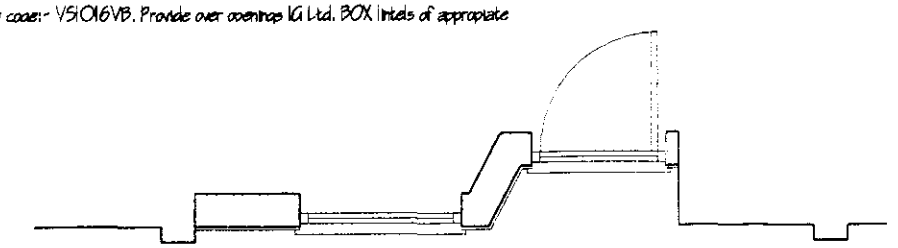

PLAN AND ELEVATION AS PROPOSED

G. R. MERCHANT
I.ENG AMICE FIWO

ARCHITECTURAL, STRUCTURAL AND LAND DRAINAGE CONSULTANTS

Unit 4, Wrights Mews
12A Park Road, Holbeach,
Spalding, Lincs. PE12 7EE
Tel: 01406 490800
Fax: 01406 426744
E-Mail: G. R. Merchant @ Merchant. FS. Co. UK

Project
ALTERATIONS TO FRONTAGE
AT 56 BRIDGE ROAD
SUTTON BRIDGE
SPALDING LINCS

Client
MR G.D SPELMAN

Drawing
PLANS AND ELEVATIONS

Job Ref.	Drawing No.
021/00	01
Date: MAY 2000	Drawn: JPW

Scales
1/50

DO NOT SCALE FROM THIS DRAWING

This drawing is copyright and may not be reused, traced, photocopied or used for any other purpose other than for which it is issued.

The General Contractor is to check all dimensions on site and report any discrepancies to the Architect.

All details shown on this drawing including foundations are based upon limited site investigations only and no responsibility can be accepted for abnormal conditions which may be discovered during construction unless reported to the Architect or Civil Engineering Consultant before commencement. Site soil surveys are recommended to ascertain foundations to establish suitable site conditions. Ordnance Datum level to be established.